

# "High Frequency Ceramic Solutions"

2.4 GHz Surface Mount, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100


This antenna must have metal directly underneath on bottom layer in order to function properly

Detail Specification: 10/17/2016

Page 1 of 4

This is the Web version of this datasheet, for the full datasheet, please contact us at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

General Specifications	
Part Number	2450AT42E0100
Frequency (MHz)	2400 - 2480
Peak Gain	-2.0 dBi typ. (YZ-V)
Impedance	50Ω
Power Capacity	2W max. (CW)
Q'ty/Reel (pcs)	2,000 pcs
Operating Temp	-40 to +85°C
Storage Temp	-40 to +85°C
Storage Period	18 months max.



**Zero Clearance!**

Antenna mounts directly above or below the metal layer of PCB. No antenna clearance required



Total average radiated efficiency on PCB feature on "Mounting Considerations 1" (orderable EVB p/n: 2450AT42E0100-EB1SMA) is ~30%

This antenna was designed in mind for small coin cell, wearable, IoT, 2.4 BLE, 802.11, ISM, Zigbee, etc. applications in close-range networks where metal or a battery/display covers the entire length or side of the PCB or encasement must be present directly under the antenna and there's no room for usual/typical antenna metal clearance.


**This antenna is specifically designed for PCBs that have 0.5-1mm of total thickness**

Part Number Explanation				
P/N Suffix	Packing Style	Bulk	Suffix = S	e.g.. 2450AT42E0100S
		T & R	Suffix = E	e.g.. 2450AT42E0100E
	EVB p/n	2450AT42E0100-EB1SMA (comes with 1 female SMA connector)		

Mechanical Specifications <sup>1</sup>		
	In	mm
L	0.197 ± 0.008	5.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.059 ± 0.008	1.50 ± 0.20

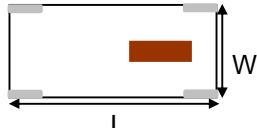Terminal Configuration	
1	Feeding Point
2	NC <sup>2</sup>
3	GND
4	GND



<sup>1</sup>Total Top layer area occupied by antenna is 6.3x3.0mm

<sup>2</sup>Make sure to have Pin 2 soldered to its PCB land pad but **not** connected to GND or input, it must be NC (or floating).

If you'd like the complete datasheet which includes detailed layout specs, tuning techniques, and application notes for IoT/wearables, send us as message at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

# "High Frequency Ceramic Solutions"

2.4 GHz Surface Mount, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100


This antenna must have metal directly underneath on bottom layer in order to function properly

Detail Specification: 10/17/2016

Page 2 of 4

This is the Web version of this datasheet, for the full datasheet, please contact us at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

## Typical Electrical Characteristics (T=25 °C) Radiation Patterns@2.44GHz

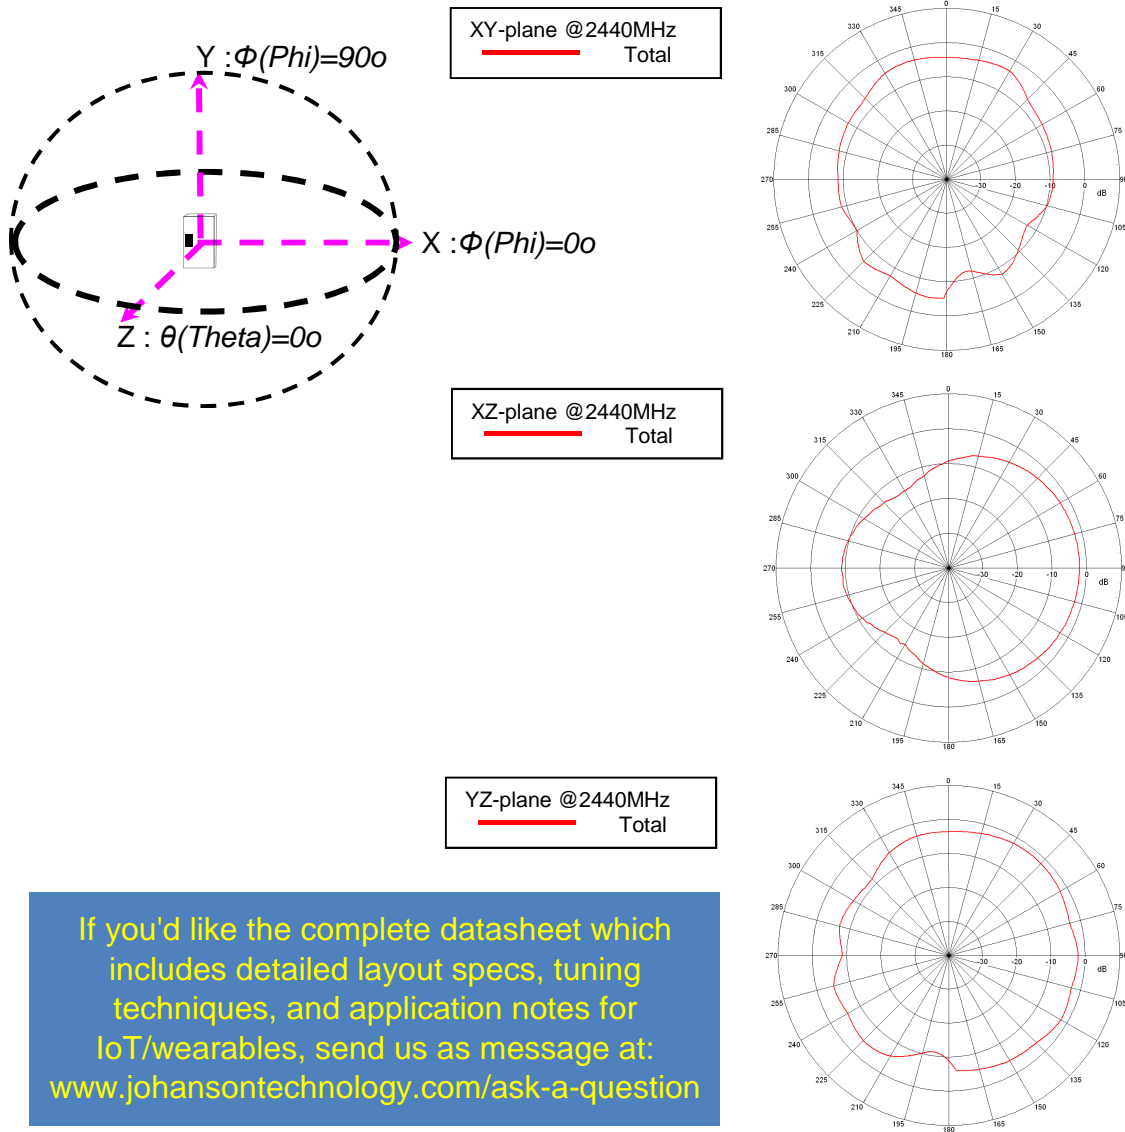

If you'd like the complete datasheet which includes detailed layout specs, tuning techniques, and application notes for IoT/wearables, send us as message at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)  
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821  
 Ver. 1.3

2016 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"

2.4 GHz Surface Mount, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100

This antenna must have metal underneath in order to function properly

Detail Specification: 10/17/2016

Page 3 of 4

## How To Choose The Correct Antenna Variant

Refer to the table below for substrate thickness and the corresponding antenna variation.

PCB Substrate Thickness	Recommended JTI PN
≤ 1.0mm	2450AT42E0100
1.0mm - 2.0mm	2450AT42E010B
≥ 2.0mm	2450AT42E010C

## Typical Efficiency Values @ 2.44GHz for various scenarios for a 30x50mm PCB

The following efficiency values represent performance on a 30x50mm EVB like on page 2. Please note that antenna efficiency varies widely with board layout, size and surroundings.

PCB Substrate Thickness (H)	Simulated Antenna Efficiency(%) @ 2.44GHz		
	2450AT42E0100	2450AT42E010B	2450AT42E010C
H = 0.12 mm	1.95%	1.02%	0.93%
H = 0.7 mm	29.20%	9.30%	2.30%
H = 1.5 mm	23.30%	41.90%	13.80%
H = 2.5 mm	21.60%	34.20%	38.40%

We encourage you to use a relatively thick dielectric layer below antenna, as we have seen a direct correlation between substrate thickness and antenna performance.

Note: "H" substrate thickness of <0.25mm (10mil) is not recommended. The component will still work and radiate, just not optimally.

If you'd like the complete datasheet which includes detailed layout specs, tuning techniques, and application notes for IoT/wearables, send us a message at:  
[www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.3

2016 Johanson Technology, Inc. All Rights Reserved

[www.johansontechnology.com](http://www.johansontechnology.com)

# "High Frequency Ceramic Solutions"

2.4 GHz Surface Mount, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100

This antenna must have metal directly underneath on bottom layer in order to function properly

Detail Specification: 10/17/2016

Page 4 of 4

*This is the Web version of this datasheet, for the full datasheet, please contact us at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)*

## Antenna layout review, tuning, and characterization services

[www.johansontechnology.com/ipc-antenna-services](http://www.johansontechnology.com/ipc-antenna-services)

## More SMD Chip Antennas at:

[www.johansontechnology.com/antennas](http://www.johansontechnology.com/antennas)

## Soldering Information

[www.johansontechnology.com/ipcsoldering-profile](http://www.johansontechnology.com/ipcsoldering-profile)

## Antenna layout and tuning techniques (How to obtain the new antenna matching values)

[www.johansontechnology.com/tuning](http://www.johansontechnology.com/tuning)

## Packaging information

<http://www.johansontechnology.com/tape-reel-packaging>

## RoHS Compliance


[www.johansontechnology.com/rohs-compliance](http://www.johansontechnology.com/rohs-compliance)

## MSL Info

[www.johansontechnology.com/msl-rating](http://www.johansontechnology.com/msl-rating)

## P/N Explanation and Breakdown

[www.johansontechnology.com/ipc-pn-explained](http://www.johansontechnology.com/ipc-pn-explained)



**Recommended Storage Conditions of  
uninstalled product still on T&R**

-40 ~ +85 °C, Humidity 45~75%RH, 18 mos. Max

If you'd like the complete datasheet which includes detailed layout specs, tuning techniques, and application notes for IoT/wearables, send us as message at:  
[www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

Technical Author: Manuel Carmona



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.3

2016 Johanson Technology, Inc. All Rights Reserved