


## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### FEATURES

- Wide range of available, fixed output voltage.
- Low cost.
- Internal short-circuit current limiting.
- Internal thermal overload protection.
- No external components required.
- MSL3
- ESD:HBM( Class 1C)
- Complementary negative regulators offered (BL79LXX series).

**HF**

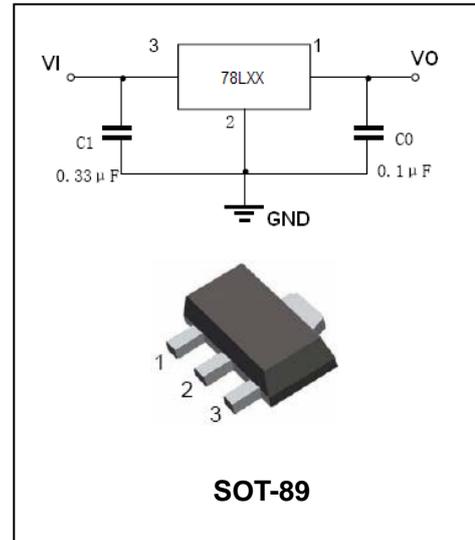

#### APPLICATIONS

- Three-terminal positive voltage regulator.

#### ORDERING INFORMATION

| Type No. | Marking | Package Code |
|----------|---------|--------------|
| BL78LXX  | 78LXX   | SOT-89       |

#### MAXIMUM RATING operating temperature range applies unless otherwise specified

| Symbol        | Parameter  | Value          | Units         |
|---------------|--|----------------|---------------|
| $V_i$         | Input voltage(78L33-78L09)<br>(78L10-78L15)<br>(78L18-78L24) | 30<br>35<br>40 | V             |
| $I_{CM}$      | Maximum output current                                       | 100            | mA            |
| $R_{th\ j-c}$ | Thermal Resistance, Junction to Case                         | 250            | $^{\circ}C/W$ |
| $P_D$         | Power dissipation  | 500            | mW            |
| $T_J$         | Operating junction temperature                               | -40 to +125    | $^{\circ}C$   |
| $T_{STG}$     | Storage temperature range                                    | -65 to +150    | $^{\circ}C$   |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=8.3V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_I=0.33\mu F, C_O=0.1\mu F$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions   | BL78L33 |     |       | UNIT    |
|---------------------------|-----------------|---|---------|-----|-------|---------|
|                           |                 |   | MIN     | TYP | MAX   |         |
| Output voltage            | $V_O$           | $T_J=25^\circ C$  | 3.168   | 3.3 | 3.432 | V       |
|                           |                 | $5.8V \leq V_i \leq 20V, I_O=1mA-40mA$                            | 3.135   | -   | 3.465 |         |
|                           |                 | $V_i=8.3V, I_O=1mA-70mA$  | 3.135   | -   | 3.465 |         |
| Load regulation           | $Reg_{load}$    | $T_J=25^\circ C, I_O=1mA-100mA$                                   | -       | -   | 60    | mV      |
|                           |                 | $T_J=25^\circ C, I_O=1mA-40mA$                                    | -       | -   | 30    |         |
| Line regulation           | $Reg_{line}$    | $5.8V \leq V_i \leq 20V, T_J=25^\circ C$                          | -       | -   | 150   | mV      |
|                           |                 | $6.3V \leq V_i \leq 20V, T_J=25^\circ C$                          | -       | -   | 100   |         |
| Input Bias Current        | $I_{IB}$        | $T_J=25^\circ C$  | -       | -   | 6.0   | mA      |
|                           |                 | $T_J=125^\circ C$   | -       | -   | 5.5   |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $6.3V \leq V_i \leq 20V$  | -       | -   | 1.5   | mA      |
|                           |                 | $1mA \leq I_O \leq 40mA$  | -       | -   | 0.1   |         |
| Output noise voltage      | $V_N$           | $10Hz \leq f \leq 100KHz$   | -       | 40  | -     | $\mu V$ |
| Ripple rejection          | RR              | $I_O=40mA, 6.3V \leq V_i \leq 16.3V$<br>$f=120Hz, T_J=25^\circ C$ | 41      | 49  | -     | dB      |
| Dropout voltage           | $V_I-V_O$       | $T_J=25^\circ C$  | -       | 2.5 | -     | V       |

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=10V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_I=0.33\mu F, C_O=0.1\mu F$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions   | BL78L05 |     |      | UNIT    |
|---------------------------|-----------------|---|---------|-----|------|---------|
|                           |                 |   | MIN     | TYP | MAX  |         |
| Output voltage            | $V_O$           | $T_J=25^\circ C$  | 4.8     | 5.0 | 5.2  | V       |
|                           |                 | $7V \leq V_i \leq 20V, I_O=1mA-40mA$                      | 4.75    | -   | 5.25 |         |
|                           |                 | $V_i=10V, I_O=1mA-70mA$                                   | 4.75    | -   | 5.25 |         |
| Load regulation           | $Reg_{load}$    | $T_J=25^\circ C, I_O=1mA-100mA$                           | -       | 11  | 60   | mV      |
|                           |                 | $T_J=25^\circ C, I_O=1mA-40mA$                            | -       | 5   | 30   |         |
| Line regulation           | $Reg_{line}$    | $7V \leq V_i \leq 20V, T_J=25^\circ C$                    | -       | 55  | 150  | mV      |
|                           |                 | $8V \leq V_i \leq 20V, T_J=25^\circ C$                    | -       | 45  | 100  |         |
| Input Bias Current        | $I_{IB}$        | $T_J=25^\circ C$  | -       | 3.8 | 6.0  | mA      |
|                           |                 | $T_J=125^\circ C$   | -       | -   | 5.5  |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $8V \leq V_i \leq 20V$                                    | -       | -   | 1.5  | mA      |
|                           |                 | $1mA \leq I_O \leq 40mA$                                  | -       | -   | 0.1  |         |
| Output noise voltage      | $V_N$           | $10Hz \leq f \leq 100KHz$                                 | -       | 40  | -    | $\mu V$ |
| Ripple rejection          | RR              | $I_O=40mA, 8V \leq V_i \leq 18V, f=120Hz, T_J=25^\circ C$ | 41      | 49  | -    | dB      |
| Dropout voltage           | $V_I-V_O$       | $T_J=25^\circ C$  | -       | 1.7 | -    | V       |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=12V, I_o=40mA, 0^{\circ}C < T_j < 125^{\circ}C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions   | BL78L06 |      |      | UNIT    |
|---------------------------|-----------------|---|---------|------|------|---------|
|                           |                 |   | MIN     | TYP  | MAX  |         |
| Output voltage            | $V_o$           | $T_j=25^{\circ}C$   | 5.75    | 6.0  | 6.25 | V       |
|                           |                 | $V_i=8.5V-20V, I_o=1mA-40mA$                                | 5.7     | -    | 6.3  |         |
|                           |                 | $V_i=8.5V, I_o=1mA-70mA$                                    | 5.7     | -    | 6.3  |         |
| Load regulation           | $Reg_{load}$    | $T_j=25^{\circ}C, I_o=1mA-100mA$                            | -       | 12.8 | 80   | mV      |
|                           |                 | $T_j=25^{\circ}C, I_o=1mA-70mA$                             |         | 5.8  | 40   |         |
| Line regulation           | $Reg_{line}$    | $8.5V \leq V_i \leq 20V, T_j=25^{\circ}C$                   | -       | 64   | 175  | mV      |
|                           |                 | $9V \leq V_i \leq 20V, T_j=25^{\circ}C$                     |         | 54   | 125  |         |
| Input Bias Current        | $I_{IB}$        | $T_j=25^{\circ}C, V_{IN}=12V, I_o=40mA$                     | -       | -    | 5.5  | mA      |
|                           |                 | $T_j=125^{\circ}C, V_{IN}=12V, I_o=40mA$                    | -       | 3.9  | 6.0  |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $9V \leq V_i \leq 20V$                                      | -       | -    | 1.5  | mA      |
|                           |                 | $1mA \leq I_o \leq 40mA$                                    |         |      | 0.1  |         |
| Output noise voltage      | $V_N$           | $10Hz \leq f \leq 100KHz$                                   | -       | 40   | -    | $\mu V$ |
| Ripple rejection          | RR              | $I_o=40mA, 10V \leq V_i \leq 20V, f=120Hz, T_j=25^{\circ}C$ | 40      | 46   | -    | dB      |
| Dropout voltage           | $V_D$           | $T_j=25^{\circ}C$   | -       | 1.7  | -    | V       |

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=14V, I_o=40mA, 0^{\circ}C < T_j < 125^{\circ}C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions   | BL78L08 |     |     | UNIT    |
|---------------------------|-----------------|---|---------|-----|-----|---------|
|                           |                 |   | MIN     | TYP | MAX |         |
| Output voltage            | $V_o$           | $T_j=25^{\circ}C$   | 7.7     | 8.0 | 8.3 | V       |
|                           |                 | $10.5V \leq V_i \leq 23V, I_o=1mA-40mA$                     | 7.6     | -   | 8.4 |         |
|                           |                 | $V_i=14V, I_o=1mA-70mA$                                     | 7.6     | -   | 8.4 |         |
| Load regulation           | $Reg_{load}$    | $T_j=25^{\circ}C, I_o=1mA-100mA$                            | -       | 15  | 80  | mV      |
|                           |                 | $T_j=25^{\circ}C, I_o=1mA-40mA$                             |         | 8.0 | 40  |         |
| Line regulation           | $Reg_{line}$    | $10.5V \leq V_i \leq 23V, T_j=25^{\circ}C$                  | -       | 20  | 175 | mV      |
|                           |                 | $11V \leq V_i \leq 23V, T_j=25^{\circ}C$                    |         | 12  | 125 |         |
| Input Bias Current        | $I_{IB}$        | $T_j=25^{\circ}C$   | -       | 3   | 6.0 | mA      |
|                           |                 | $T_j=125^{\circ}C$  |         | -   | 5.5 |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $11V \leq V_i \leq 23V$                                     | -       | -   | 1.5 | mA      |
|                           |                 | $1mA \leq I_o \leq 40mA$                                    |         |     | 0.1 |         |
| Output noise voltage      | $V_N$           | $T_A=25^{\circ}C, 10Hz \leq f \leq 100KHz$                  | -       | 60  | -   | $\mu V$ |
| Ripple rejection          | RR              | $I_o=40mA, 12V \leq V_i \leq 23V, f=120Hz, T_j=25^{\circ}C$ | 37      | 57  | -   | dB      |
| Dropout voltage           | $V_I-V_o$       | $T_j=25^{\circ}C$   | -       | 1.7 | -   | V       |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=15V, I_O=40mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions  | BL78L09 |     |     | UNIT    |
|---------------------------|-----------------|--|---------|-----|-----|---------|
|                           |                 |  | MIN     | TYP | MAX |         |
| Output voltage            | $V_O$           | $T_j=25^\circ C$   | 8.6     | 9.0 | 9.4 | V       |
|                           |                 | $V_i=11.5V-24V, I_O=1mA-40mA$                              | 8.5     | -   | 9.5 |         |
|                           |                 | $V_i=15V, I_O=1mA-70mA$                                    | 8.5     | -   | 9.5 |         |
| Load regulation           | $Reg_{load}$    | $T_j=25^\circ C, I_O=1mA-100mA$                            | -       | 15  | 90  | mV      |
|                           |                 | $T_j=25^\circ C, I_O=1mA-40mA$                             | -       | 8.0 | 40  |         |
| Line regulation           | $Reg_{line}$    | $11.5V \leq V_i \leq 24V, T_j=25^\circ C$                  | -       | 20  | 175 | mV      |
|                           |                 | $12V \leq V_i \leq 24V, T_j=25^\circ C$                    | -       | 12  | 125 |         |
| Input Bias Current        | $I_{IB}$        | $T_j=25^\circ C$   | -       | 3.0 | 6.0 | mA      |
|                           |                 | $T_j=125^\circ C$  | -       | -   | 5.5 |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $11V \leq V_i \leq 23V$                                    | -       | -   | 1.5 | mA      |
|                           |                 | $1mA \leq I_O \leq 40mA$                                   | -       | -   | 0.1 |         |
| Output noise voltage      | $V_N$           | $T_A=25^\circ C, 10Hz \leq f \leq 100KHz$                  | -       | 60  | -   | $\mu V$ |
| Ripple rejection          | RR              | $I_O=40mA, 13V \leq V_i \leq 24V, f=120Hz, T_j=25^\circ C$ | 37      | 57  | -   | dB      |
| Dropout voltage           | $V_I-V_O$       | $T_j=25^\circ C$   | -       | 1.7 | -   | V       |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=16V, I_O=40mA, C_{IN}=0.33\mu F, C_O=0.1\mu f, T_j = 0$  to  $125^\circ C$ , unless otherwise specified)

| Parameter                 | Symbol              | Test conditions  | BL78L10 |     |      | UNIT          |
|---------------------------|---------------------|--|---------|-----|------|---------------|
|                           |                     |  | MIN     | TYP | MAX  |               |
| Output voltage            | $V_O$               | $T_j=25^\circ C$                                       | 9.6     | 10  | 10.4 | V             |
| Load regulation(Note1)    | $\Delta Reg_{load}$ | $I_O = 1$ to $100mA$ ,<br>$T_j = 25^\circ C$           | -       | 17  | 90   | mV            |
|                           |                     | $I_O = 1$ to $40mA$ ,<br>$T_j = 25^\circ C$            | -       | 9   | 45   | mV            |
| Line regulation(Note1)    | $\Delta Reg_{line}$ | $V_i = 12.5$ to $25V$ ,<br>$T_j = 25^\circ C$          | -       | 100 | 210  | mV            |
|                           |                     | $V_i = 13$ to $25V$ ,<br>$T_j = 25^\circ C$            | -       | 90  | 160  | mV            |
| Input Bias Current        | $I_{IB}$            | $T_j = 25^\circ C$                                     | -       | 2.0 | 3.0  | mA            |
| Input Bias Current Change | $\Delta I_{IB}$     | $V_i = 13$ to $25V$ ,<br>$T_j = 25^\circ C$            | -       | -   | 1.0  | mA            |
| Output Noise Voltage      | $V_N$               | $10Hz \leq f \leq 100KHz$                              | -       | 70  | -    | $\mu V$       |
| Ripple Rejection          | RR                  | $V_i = 13$ to $23V$ ,<br>$I_O = 40mA$ ,<br>$f = 120Hz$ | 42      | 52  | -    | dB            |
| Dropout Voltage           | $V_D$               | $T_j=25^\circ C$                                       | -       | 1.7 | -    | V             |
| Dropout voltage           | $V_i-V_O$           | $I_O = 5mA, T_j = 0$<br>to $125^\circ C$               | -       | 0.9 | -    | $mV/^\circ C$ |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=19V, I_O=40mA, 0^{\circ}C < T_J < 125^{\circ}C, C_I=0.33\mu F, C_O=0.1\mu f$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions  | BL78L12 |     |            | UNIT    |
|---------------------------|-----------------|--|---------|-----|------------|---------|
|                           |                 |  | MIN     | TYP | MAX        |         |
| Output voltage            | $V_O$           | $T_J=25^{\circ}C$  | 11.5    | 12  | 12.5       | V       |
|                           |                 | $V_i=14.5V-27V, I_O=1mA-40mA$                                    | 11.4    | -   | 12.6       |         |
|                           |                 | $V_i=19V, I_O=1mA-70mA$  | 11.4    | -   | 12.6       |         |
| Load regulation           | $Reg_{load}$    | $T_J=25^{\circ}C, I_O=1mA-100mA$                                 | -       | 20  | 100        | mV      |
|                           |                 | $T_J=25^{\circ}C, I_O=1mA-40mA$                                  | -       | 10  | 50         |         |
| Line regulation           | $Reg_{line}$    | $14.5V \leq V_i \leq 27V, T_J=25^{\circ}C$                       | -       | 120 | 250        | mV      |
|                           |                 | $16V \leq V_i \leq 27V, T_J=25^{\circ}C$                         | -       | 100 | 200        |         |
| Input Bias Current        | $I_{IB}$        | $T_J=25^{\circ}C$  | -       | 4.2 | 6.5        | mA      |
|                           |                 | $T_J=125^{\circ}C$   | -       | -   | 6.0        |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $16V \leq V_i \leq 27V$<br>$1mA \leq I_O \leq 40mA$              | -       | -   | 1.5<br>0.1 | mA      |
| Output Noise Voltage      | $V_N$           | $10Hz \leq f \leq 100KHz, T_A=25^{\circ}C$                       | -       | 80  | -          | $\mu V$ |
| Ripple rejection          | RR              | $I_O=40mA, 15V \leq V_i \leq 25V, f=120Hz,$<br>$T_J=25^{\circ}C$ | 37      | 42  | --         | dB      |
| Dropout voltage           | $V_I-V_O$       | $T_J=25^{\circ}C$  | -       | 1.7 | -          | V       |

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=23V, I_O=40mA, 0^{\circ}C < T_J < 125^{\circ}C, C_I=0.33\mu F, C_O=0.1\mu f$ , unless otherwise specified)

| Parameter                 | Symbol                   | Test conditions  | BL78L15 |     |            | UNIT    |
|---------------------------|--------------------------|--|---------|-----|------------|---------|
|                           |                          |  | MIN     | TYP | MAX        |         |
| Output voltage            | $V_O$                    | $T_J=25^{\circ}C$  | 14.4    | 15  | 15.6       | V       |
|                           |                          | $V_i=17.5V-30V, I_O=1mA-40mA$  | 14.25   | -   | 15.75      |         |
|                           |                          | $V_i=23V, I_O=1mA-70mA$  | 14.25   | -   | 15.75      |         |
| Load regulation           | $\Delta$<br>$Reg_{load}$ | $T_J=25^{\circ}C, I_O=1mA-100mA$                                     | -       | 25  | 150        | mV      |
|                           |                          | $T_J=25^{\circ}C, I_O=1mA-40mA$                                      | -       | 12  | 75         |         |
| Line regulation           | $\Delta$<br>$Reg_{line}$ | $17.5V \leq V_i \leq 30V, T_J=25^{\circ}C$                           | -       | 130 | 300        | mV      |
|                           |                          | $20V \leq V_i \leq 30V, T_J=25^{\circ}C$                             | -       | 110 | 250        |         |
| Input Bias Current        | $I_{IB}$                 | $T_J=25^{\circ}C$  | -       | 4.4 | 6.5        | mA      |
|                           |                          | $T_J=125^{\circ}C$   | -       | -   | 6.0        |         |
| Input Bias Current Change | $\Delta I_{IB}$          | $20V \leq V_i \leq 30V$<br>$1mA \leq I_O \leq 40mA$                  | -       | -   | 1.5<br>0.1 | mA      |
| Output noise voltage      | $V_N$                    | $10Hz \leq f \leq 100KHz, T_A=25^{\circ}C$                           | -       | 90  | -          | $\mu V$ |
| Ripple rejection          | RR                       | $I_O=40mA, 18.5V \leq V_i \leq 28.5V,$<br>$f=120Hz, T_J=25^{\circ}C$ | 34      | 39  | -          | dB      |
| Dropout voltage           | $V_I-V_O$                | $T_J=25^{\circ}C$  | -       | 1.7 | -          | V       |

## Three-Terminal Low Current Positive Voltage Regulators

### BL78LXX

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=27V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_I=0.33\mu F, C_O=0.1\mu f$ , unless otherwise specified)

| Parameter                 | Symbol          | Test conditions   | BL78L18 |     |            | UNIT    |
|---------------------------|-----------------|---|---------|-----|------------|---------|
|                           |                 |   | MIN     | TYP | MAX        |         |
| Output voltage            | $V_O$           | $T_J=25^\circ C$  | 17.3    | 18  | 18.7       | V       |
|                           |                 | $V_i=20.7V-33V, I_O=1mA-40mA$                                   | 17.1    | -   | 18.9       |         |
|                           |                 | $V_i=27V, I_O=1mA-70mA$   | 17.1    | -   | 18.9       |         |
| Load regulation           | $Reg_{load}$    | $T_J=25^\circ C, I_O=1mA-100mA$                                 | -       | 30  | 170        | mV      |
|                           |                 | $T_J=25^\circ C, I_O=1mA-40mA$                                  | -       | 15  | 85         |         |
| Line regulation           | $Reg_{line}$    | $20.7V \leq V_i \leq 33V, T_J=25^\circ C$                       | -       | 45  | 325        | mV      |
|                           |                 | $21V \leq V_i \leq 33V, T_J=25^\circ C$                         | -       | 35  | 275        |         |
| Input Bias Current        | $I_{IB}$        | $T_J=25^\circ C$  | -       | 3.1 | 6.5        | mA      |
|                           |                 | $T_J=125^\circ C$   | -       | -   | 6.0        |         |
| Input Bias Current Change | $\Delta I_{IB}$ | $21V \leq V_i \leq 33V$<br>$1mA \leq I_O \leq 40mA$             | -       | -   | 1.5<br>0.1 | mA      |
| Output Noise Voltage      | $V_N$           | $10Hz \leq f \leq 100KHz, T_A=25^\circ C$                       | -       | 150 | -          | $\mu V$ |
| Ripple rejection          | RR              | $I_O=40mA, 23V \leq V_i \leq 33V, f=120Hz,$<br>$T_J=25^\circ C$ | 33      | 48  | -          | dB      |
| Dropout voltage           | $V_I-V_O$       | $T_J=25^\circ C$  | -       | 1.7 | -          | V       |

#### ELECTRICAL CHARACTERISTICS

( $V_{IN}=33V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_I=0.33\mu F, C_O=0.1\mu f$ , unless otherwise specified)

| Parameter                 | Symbol                   | Test conditions   | BL78L24 |     |            | UNIT    |
|---------------------------|--------------------------|---|---------|-----|------------|---------|
|                           |                          |   | MIN     | TYP | MAX        |         |
| Output voltage            | $V_O$                    | $T_J=25^\circ C$  | 23      | 24  | 25         | V       |
|                           |                          | $V_i=27V-38V, I_O=1mA-40mA$                                     | 22.8    | -   | 25.2       |         |
|                           |                          | $V_i=27V-33V, I_O=1mA-70mA$                                     | 22.8    | -   | 25.2       |         |
| Load regulation           | $\Delta$<br>$Reg_{load}$ | $T_J=25^\circ C, I_O=1mA-100mA$                                 | -       | 40  | 200        | mV      |
|                           |                          | $T_J=25^\circ C, I_O=1mA-40mA$                                  | -       | 20  | 100        |         |
| Line regulation           | $\Delta$<br>$Reg_{line}$ | $28V \leq V_i \leq 80V, T_J=25^\circ C$                         | -       | 50  | 300        | mV      |
|                           |                          | $27V \leq V_i \leq 38V, T_J=25^\circ C$                         | -       | 60  | 350        |         |
| Input Bias Current        | $I_{IB}$                 | $T_J=25^\circ C$  | -       | 3.1 | 6.5        | mA      |
|                           |                          | $T_J=125^\circ C$   | -       | -   | 6.0        |         |
| Input Bias Current Change | $\Delta I_{IB}$          | $28V \leq V_i \leq 38V$<br>$1mA \leq I_O \leq 40mA$             | -       | -   | 1.5<br>0.1 | mA      |
| Output noise voltage      | $V_N$                    | $10Hz \leq f \leq 100KHz, T_A=25^\circ C$                       | -       | 200 | -          | $\mu V$ |
| Ripple rejection          | RR                       | $I_O=40mA, 29V \leq V_i \leq 35V,$<br>$f=120Hz, T_J=25^\circ C$ | 31      | 45  | -          | dB      |
| Dropout voltage           | $V_I-V_O$                | $T_J=25^\circ C$  | -       | 1.7 | -          | V       |

# Three-Terminal Low Current Positive Voltage Regulators

## BL78LXX

TYPICAL CHARACTERISTICS @  $T_a=25^\circ\text{C}$  unless otherwise specified

Figure 1. Dropout Characteristics

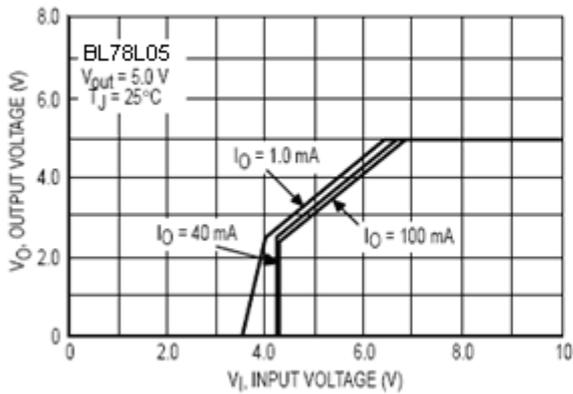


Figure 2. Dropout Voltage versus Junction Temperature

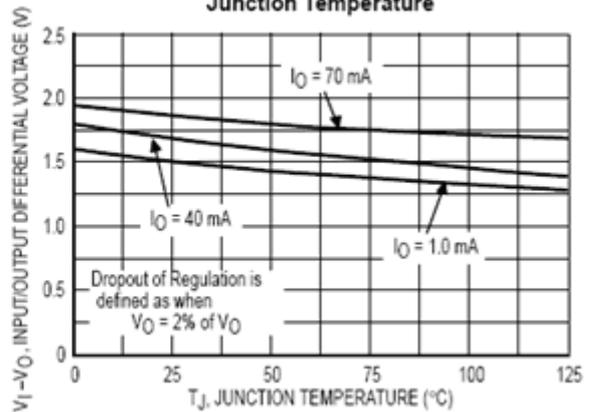


Figure 3. Input Bias Current versus Ambient Temperature


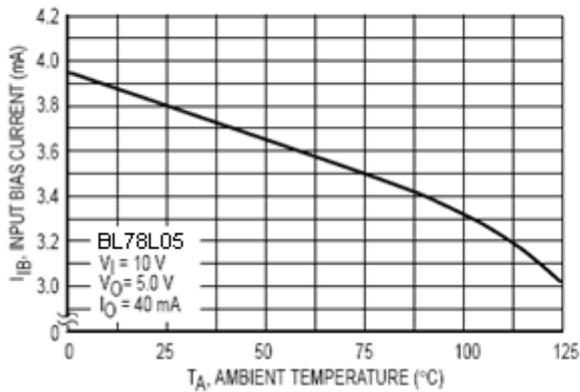


Figure 4. Input Bias Current versus Input Voltage

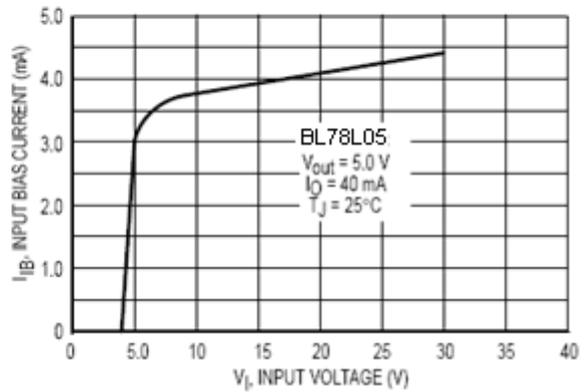


# Three-Terminal Low Current Positive Voltage Regulators

## BL78LXX


### PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

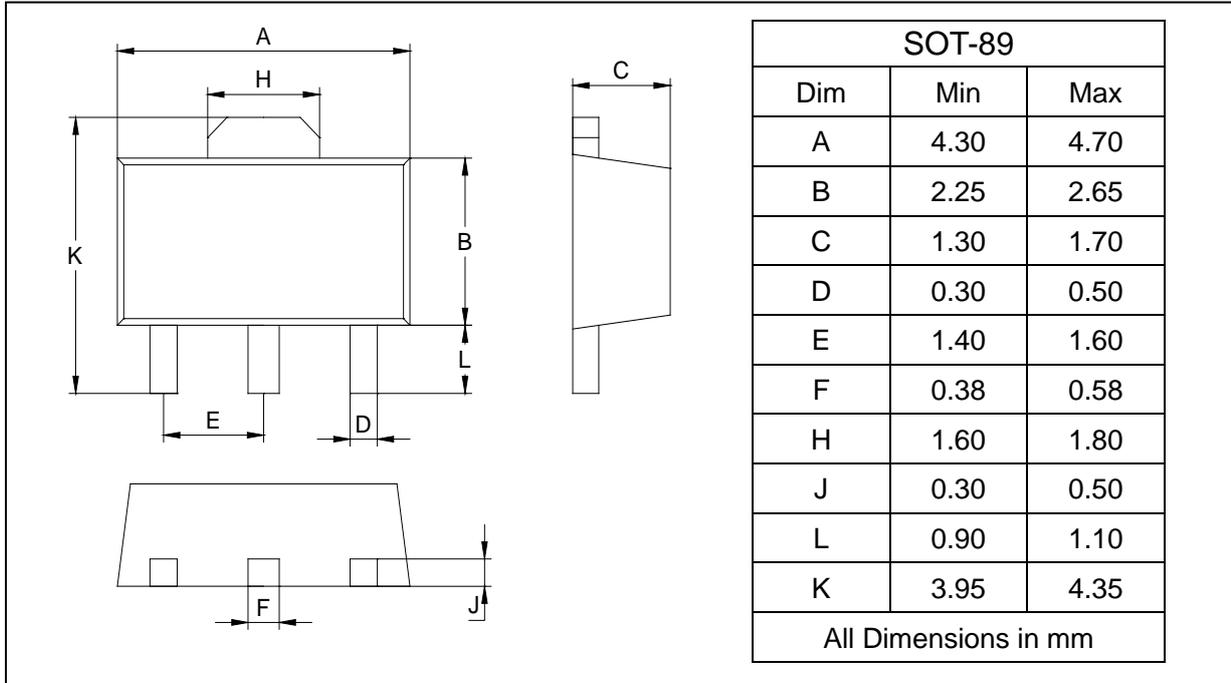

### SOLDERING FOOTPRINT

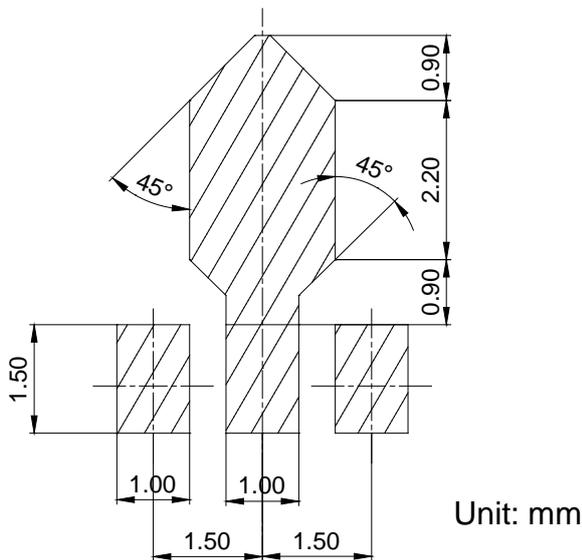

### PACKAGE INFORMATION

| Device  | Package | Shipping               |
|---------|---------|------------------------|
| BL78LXX | SOT-89  | 1000 pcs / Tape & Reel |