

FEATURESMaximum Output Current I_O : 0.1 AOutput Voltage V_O : 5 V


Continuous Total Dissipation

 P_D : 0.5 W ($T_a = 25^\circ C$)**SOT-89-3L**

1. OUT

2. GND

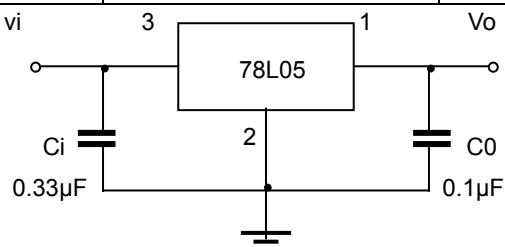
3. IN

**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	V_o	25°C	4.8	5.0	5.2	V	
		7V≤ V_i ≤20V, $I_o=1mA$ ~ $40mA$	0-125°C	4.75	5.0	5.25	V
		$I_o=1mA$ ~ $70mA$		4.75	5.0	5.25	V
Load Regulation	ΔV_o	$I_o=1mA$ ~ $100mA$	25°C		15	mV	
		$I_o=1mA$ ~ $40mA$	25°C		8	mV	
Line regulation	ΔV_o	7V≤ V_i ≤20V			32	mV	
		8V≤ V_i ≤20V	25°C		26	100 mV	
Quiescent Current	I_q		25°C		3.8	mA	
Quiescent Current Change	ΔI_q	8V≤ V_i ≤20V	0-125°C		1.5	mA	
	ΔI_q	1mA≤ V_i ≤40mA	0-125°C		0.1	mA	
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C		42	uV	
Ripple Rejection	RR	8V≤ V_i ≤20V, f=120Hz	0-125°C	41	49	dB	
Dropout Voltage	V_d		25°C		1.7	V	

TYPICAL APPLICATION

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.