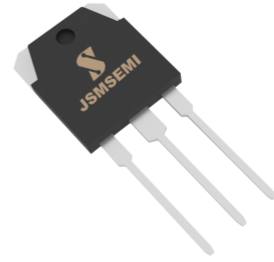


**DESCRIPTION**

- With TO-247 package
- Complement to type TIP35/35A/35B/35C
- DC current gain  $h_{FE}=25(\text{Min})@I_C=-1.5\text{A}$

**APPLICATIONS**

- Designed for use in general purpose power amplifier and switching applications.


**Absolute maximum ratings(Ta=°C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	TIP36	-40	V
		TIP36A	-60	
		TIP36B	-80	
		TIP36C	-100	
V <sub>CEO</sub>	Collector-emitter voltage	TIP36	-40	V
		TIP36A	-60	
		TIP36B	-80	
		TIP36C	-100	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-5	V
I <sub>C</sub>	Collector current		-25	A
I <sub>CM</sub>	Collector current-peak		-40	A
I <sub>B</sub>	Base current		-5	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25°C	125	W
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-65~150	°C

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>thj-c</sub>	Thermal resistance junction to case	1.0	°C/W

**CHARACTERISTICS**

 T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO(SUS)</sub>	Collector-emitter sustaining voltage	TIP36	I <sub>C</sub> =-30mA ; I <sub>B</sub> =0	-40			V
		TIP36A		-60			
		TIP36B		-80			
		TIP36C		-100			
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =-15A ; I <sub>B</sub> =-1.5A			-1.8	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =-25A ; I <sub>B</sub> =-5A			-4.0	V
V <sub>BE-1</sub>	Base-emitter on voltage		I <sub>C</sub> =-15A ; V <sub>CE</sub> =-4V			-2.0	V
V <sub>BE-2</sub>	Base-emitter on voltage		I <sub>C</sub> =-25A ; V <sub>CE</sub> =-4V			-4.0	V
I <sub>CEO</sub>	Collector cut-off current	TIP36/36A	V <sub>CE</sub> =-30V ; I <sub>B</sub> =0			-1.0	mA
		TIP36B/36C	V <sub>CE</sub> =-60V ; I <sub>B</sub> =0				
I <sub>CES</sub>	Collector cut-off current	TIP36	V <sub>CE</sub> =-40V ; V <sub>EB</sub> =0			-0.7	mA
		TIP36A	V <sub>CE</sub> =-60V ; V <sub>EB</sub> =0				
		TIP36B	V <sub>CE</sub> =-80V ; V <sub>EB</sub> =0				
		TIP36C	V <sub>CE</sub> =-100V ; V <sub>EB</sub> =0				
I <sub>EBO</sub>	Emitter cut-off current		V <sub>EB</sub> =-5V ; I <sub>C</sub> =0			-1.0	mA
h <sub>FE-1</sub>	DC current gain		I <sub>C</sub> =-1.5A ; V <sub>CE</sub> =-4V	25			
h <sub>FE-2</sub>	DC current gain		I <sub>C</sub> =-15A ; V <sub>CE</sub> =-4V	15		75	
f <sub>T</sub>	Transition frequency		I <sub>C</sub> =-1A ; V <sub>CE</sub> =-10V	3			MHz

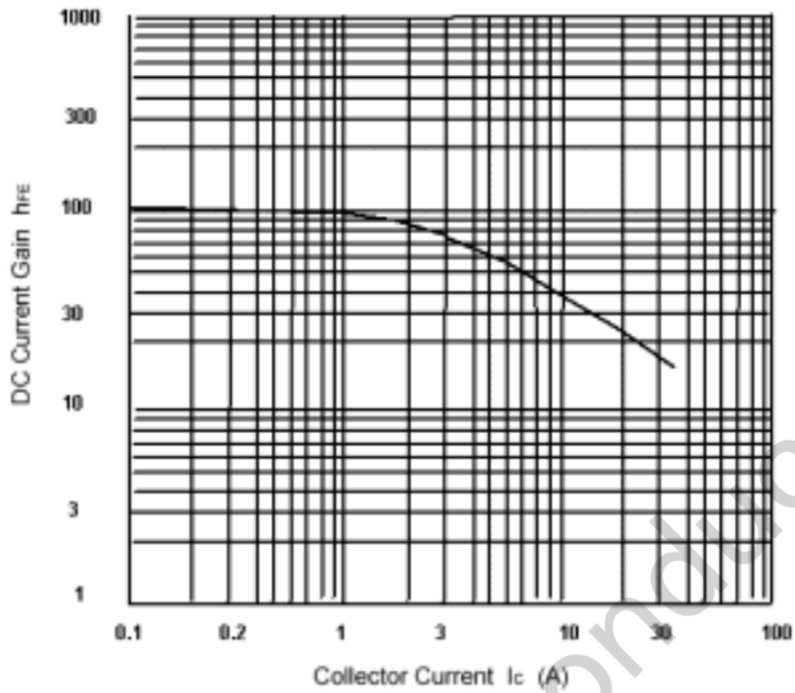


Fig.3 DC current Gain


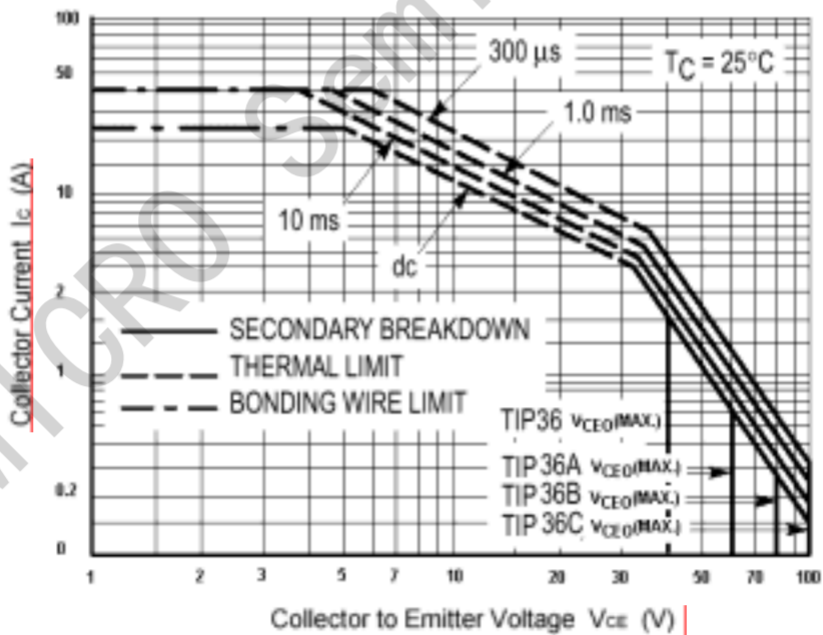


Fig.4 Safe Operating Area

### Package Information

TO-247

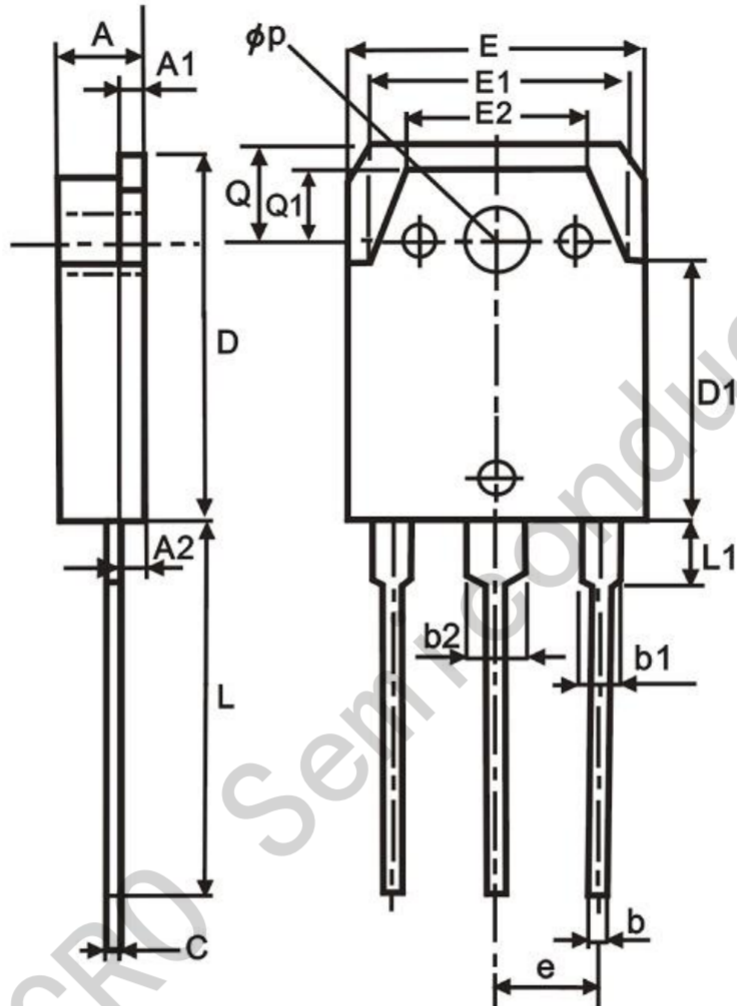

UNIT: mm

SYMBOL	min	nom	max	SYMBOL	min	nom	max
A	4.40		5.10	E	15.20		16.20
A1	1.40	1.50	1.70	E1		13.60	
A2	2.10	2.40	2.70	E2		9.60	
b	0.80	1.00	1.20	e	5.15	5.45	5.75
b1	1.90		2.30	L	19.00	20.00	21.00
b2	2.90		3.30	L1	2.50		3.50
C	0.45	0.60	0.75	Q		5.10	
D	19.40	19.90	20.40	Q1		3.90	
D1		13.90					