


Features

- ◆ Small size, low profile
- ◆ SMT package or SIP version
- ◆ Cost-efficient open frame design
- ◆ Wide input voltage ranges
- ◆ Output voltages trim from 0.75 VDC to 5.5 VDC
- ◆ Delivers up to 30 A with minimal derating
- ◆ Ultra high efficiency to 96 %
- ◆ Fast transient response
- ◆ Remote On/Off control
- ◆ Wide temperature range -40°C to $+85^{\circ}\text{C}$
- ◆ SMT package fully DOSA compatible
- ◆ Lead free design – RoHS compliant

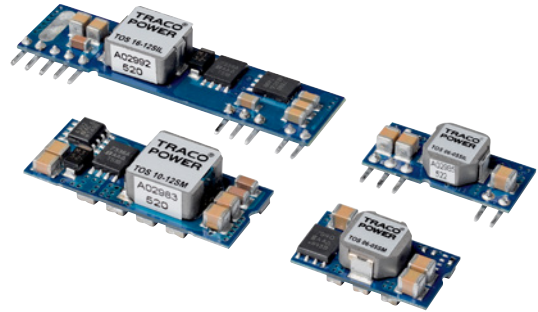

The TOS series is a range of high performance non-isolated dc-dc converters With very high efficiency that can supply up to 30A of output current. These modules provide precisely regulated output voltages which can be set via an external resistor to a value from 0.75 VDC to 5.5 VDC. These converters work over a wide input voltage range of 2.4 to 5.5 VDC or 8.3 to 14.0 VDC. Further features include remote On/Off, under voltage lockout, over temperature and over current protection. These products have an open-frame construction with very small footprint and are available in an industry standard SIP or in a SMT package. The TOS series is fully RoHS compliant and can withstand industry standard handling, cleaning and the high temperatures of lead-free reflow solder processes.

Models

Order code SMT-version	Input voltage range	Output voltage range	Output current max.	Efficiency typ.
TOS 06-05SM	2.4 – 5.5 VDC	0.75 – 3.3 VDC**	6 A	94 %
TOS 10-05SM			10 A	93 %
TOS 16-05SM			16 A	95 %
TOS 06-12SM	8.3 – 14.0 VDC	0.75 – 5.0 VDC	6 A	89 %
TOS 10-12SM			10 A	93 %
TOS 16-12SM			16 A	92 %
SIL-version				
TOS 06-05SIL	2.4 – 5.5 VDC	0.75 – 3.3 VDC*	6 A	94 %
TOS 10-05SIL			10 A	93 %
TOS 16-05SIL			16 A	95 %
TOS 06-12SIL	8.3 – 14 VDC	0.75 – 5.0 VDC	6 A	89 %
TOS 10-12SIL			10 A	93 %
TOS 16-12SIL			16 A	92 %

Models

Datasheet for 30A Models see: www.tracopower.com/products/tox30.pdf

Order code SMT-version	Input voltage range	Output voltage range	Output current max.	Efficiency typ.
TOS 30-05SM	4.5 – 5.5 VDC	0.80 – 3.6 VDC	30 A	93 %
TOS 30-12SM	6.0 – 14.0 VDC	0.80 – 3.6 VDC	30 A*	92 %
SIL-version				
TOS 30-05SIL	4.5 – 5.5 VDC	0.80 – 5.5 VDC	30 A	93 %
TOS 30-12SIL	6.0 – 14.0 VDC	0.80 – 5.5 VDC	30 A*	92 %

* 25 A output voltage higher than 2.75 VDC

** Max output voltage to be adjusted min. 0.5 VDC below impressed input voltage

Input Specifications

Input current no load	– Vin 5 VDC (at Vout min./Vout max.)	6 A models:	20 mA / 45 mA typ.
		10 A / 16 A models:	100 mA / 130 mA typ.
Stand by input current (at remote Off)	– Vin 12 VDC (at Vout min./Vout max.)	6 A models:	1 mA typ.
		10 A / 16 A models:	2 mA typ.
		6 A models:	6 A
		10 A models:	10 A
Max. input current	– Vin 5 VDC	16 A models:	16 A
		6 A models:	4.5 A
Start up voltage / under voltage lockout	– Vin 12 VDC	10 A models:	7 A
		16 A models:	10 A
		5 Vin models:	2.2 VDC / 2.0 VDC typ.
		12 Vin models:	7.9 VDC / 7.8 VDC typ.
Start up time (power / remote On till Vout set)			8 mS typ.
Reflected ripple current (with input filter)	– Vin 5 VDC	6 A models:	35 mA typ.
		10 A / 16 A models:	100 mA typ.
Input filter external (recommended)	– Vin 12 VDC	6 A models:	30 mA typ.
		10 A models:	20 mA typ.
		16 A models:	20 mA typ.
		2 x 150 µF low ESR polymer capacitors and 2 x 47 µF ceramic capacitors	

Output Specifications

Voltage set accuracy		±2 % max. (see page 3 for set up)	
Voltage balance (dual output models)		±1 % max.	
Regulation	– Input variation	±0.3 % max.	
	– Load variation 0 – 100 %	±0.4 % max.	
Dynamic load response max. peak variation / response time	– 50 % load change (upper half) with external 1 µF ceramic- and 10 µF tantalum capacitors	Vin 5 VDC, 6 A models:	130 mV / 60 µS typ.
		Vin 12 VDC, 6 A models:	200 mV / 35 µS typ.
		Vin 5 VDC, 10 A models:	200 mV / 25 µS typ.
		Vin 12 VDC, 10 A models:	200 mV / 25 µS typ.
		Vin 5 VDC, 16 A models:	300 mV / 25 µS typ.
		Vin 12 VDC, 16 A models:	200 mV / 25 µS typ.
	– 50 % load change (upper half) with external 2 x 150 µF polymer capacitors	Vin 5 VDC, 6 A models:	50 mV / 100 µS typ.
		Vin 12 VDC, 6 A models:	50 mV / 50 µS typ.
		Vin 5 VDC, 10 A models:	100 mV / 100 µS typ.
		Vin 12 VDC, 10 A models:	100 mV / 25 µS typ.
		Vin 5 VDC, 16 A models:	150 mV / 100 µS typ.
		Vin 12 VDC, 16 A models:	100 mV / 50 µS typ.
Ripple and noise (20 MHz Bandwidth)	5 Vin models:	50 mV pk-pk max.	
	12 Vin models:	75 mV pk-pk max.	
Temperature coefficient		±0.4 % typ.	
Over current protection		at +200 % of Iout max. typ.	
Short circuit protection		indefinite, automatic recovery	
Capacitive load	– ESR <1 mOhm	1000 µF max.	
	– ESR <10 mOhm	6 A models:	3000 µF max.
		10 A / 16 A models:	5000 µF max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Temperature ranges	- Operating - Storage	-40°C to +85°C -55°C to +125°C
Derating		see application note
Over temperature protection		at +125°C typ.
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (Bellcore TR-NWT-000332)	6 A models: 10 A / 16 A models:	>20 mio. h at +40°C >14 mio. h at +40°C
Switching frequency		300 kHz typ. (pulse width modulation - PWM)
Remote On/Off (reference to GND)		On: 1 VDC to Vin max. or open circuit. Off: 0 to 0.3 VDC

Physical Specifications

Weight	6 A models: 10 A / 16 A models:	2.8 g 6.0 g
Soldering profile	- SIL - Version - SMT - Version	max. 265°C / 10 sec. (wave soldering) peak temp. 245°C for 10 sec. max., 217°C for 90 sec. max. (Convection reflow solder process is recommended)

Application note: www.tracopower.com/products/tos-application.pdf

Output Voltage Adjustment

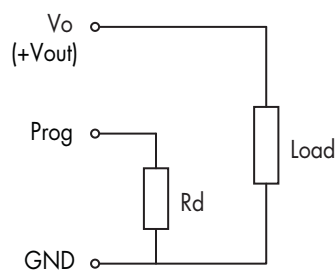

5 VDC input models: $R_d [\text{Ohm}] = \frac{21070}{V_o - 0.7525} - 5110$


12 VDC input models: $R_d [\text{Ohm}] = \frac{10570}{V_o - 0.7525} - 1000$

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions mm (inches)

Single-in-Line (SIL-Version)

6 A output Models

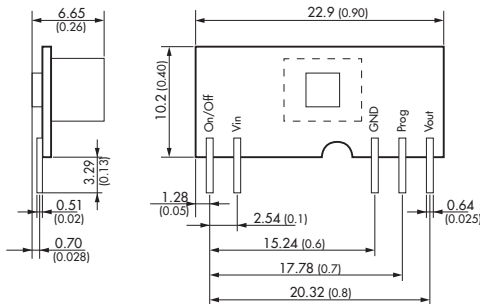

10A & 16A output models




Surface Mount (SMT-Version)

6 A output Models



10A & 16A output models

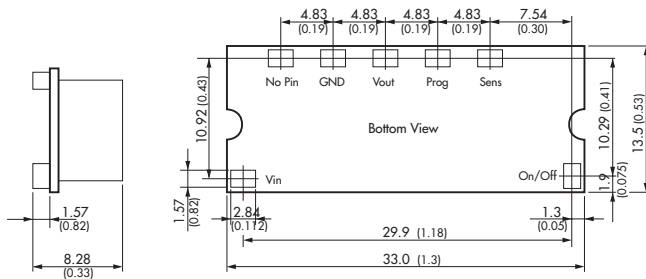

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com