
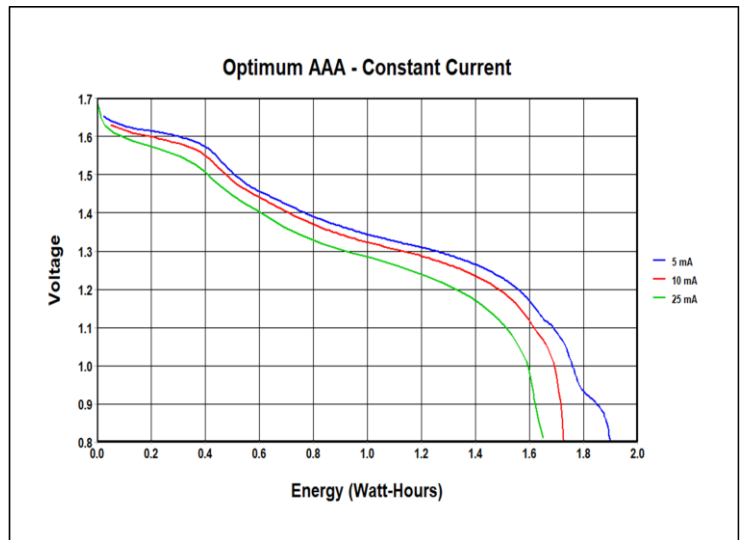


Dimensions shown are ANSI standards



|                                    |  |
|------------------------------------|--|
| <b>Nominal voltage</b>             | 1.5 V                                      |
| <b>Impedance</b>                   | 114 m-ohm @ 1 kHz                          |
| <b>Typical weight</b>              | 11 g (0.4 oz)                              |
| <b>Typical volume</b>              | 3.5 cm <sup>3</sup> (0.2 in <sup>3</sup> ) |
| <b>Terminals</b>                   | Flat                                       |
| <b>Storage temperature range</b>   | 5°C to 30°C (41°F to 86°F)                 |
| <b>Operating temperature range</b> | -20°C to 54°C (-4°F to 130°F)              |
| <b>Designation</b>                 | <b>ANSI: 24A IEC: LR03</b>                 |

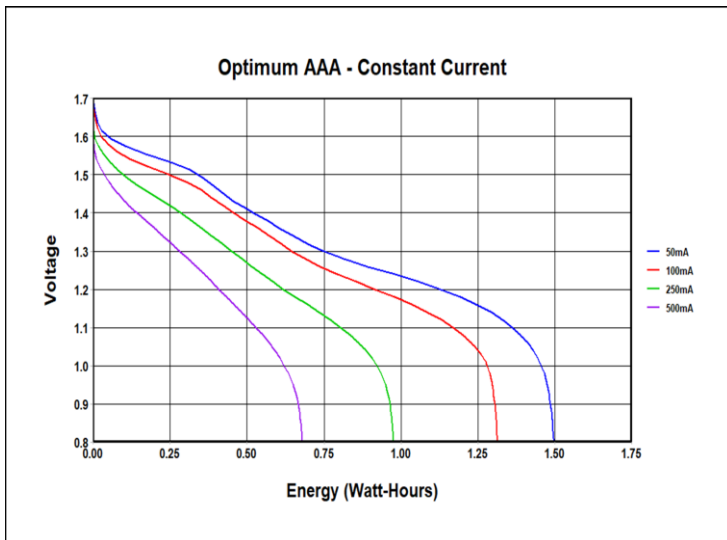

# DURACELL®

A Berkshire Hathaway Company  
 Berkshire Corporate Park  
 Bethel, CT. 06801 U.S.A.  
 Telephone: Toll-free 1-800-544-5454  
 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

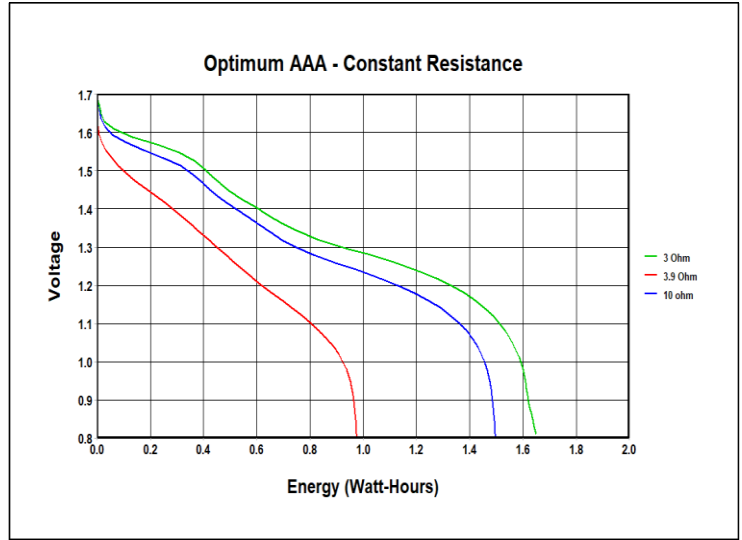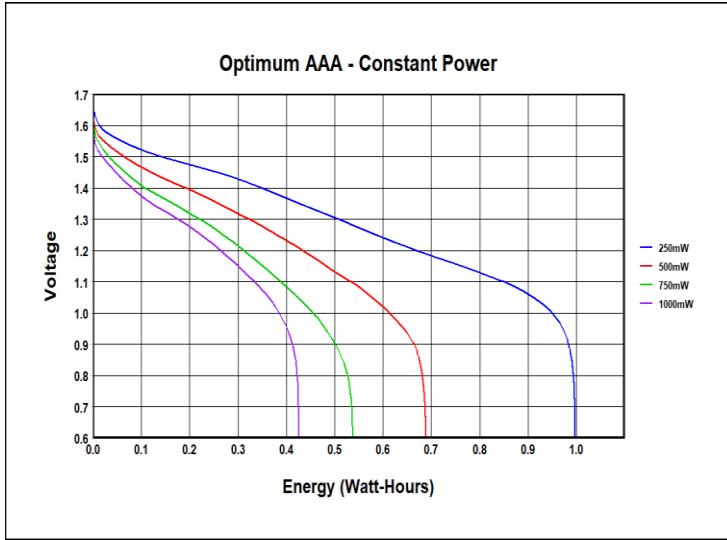

# DURACELL<sup>®</sup>

A Berkshire Hathaway Company  
 Berkshire Corporate Park  
 Bethel, CT. 06801 U.S.A.  
 Telephone: Toll-free 1-800-544-5454  
 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.