

SZP6SMB Series

Surface Mount > 600W



Additional Information



Resources



Accessories




Samples

Agency Approvals

| Agency | Agency File/Certificate Number |
|--------|--------------------------------|
| | E128662 |

Functional Diagram

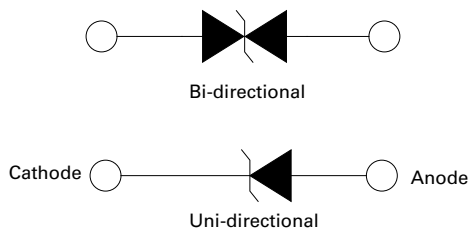

Description

The SZP6SMB series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low breakdown impedance and fast response time. The SZP6SMB series is supplied in the Littelfuse exclusive, cost-effective, highly reliable package and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer applications.

Features & Benefits

- Zener Transient Overvoltage Suppressors
- Working Peak Reverse Voltage Range – 5.8 to 171 V (for Uni-directional), 9.4 to 77.8 V (for Bi-directional)
- Standard Breakdown Voltage Range – 6.45 to 210V for Uni-directional, 10.5 to 95.5 V for Bi-directional
- Peak Power – 600 W @ 1 ms
- ESD protection of data lines in accordance with IEC 61000-4-2 30kV(Air), 30kV (Contact)
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Maximum Clamp Voltage @ Peak Pulse Current
- $V_{BR} @ T_J = V_{BR} @ 25^{\circ}C \times (1 + \alpha_T \times (T_J - 25))$ (α_T : Temperature Coefficient)
- Low Leakage < 5 μA Above 10 V
- Response Time is Typically < 1 ns
- Pb-free means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

Maximum Ratings and Thermal Characteristics

| Parameter | Symbol | Value | Unit |
|--|-----------------|-------------|----------------------|
| Peak Power Dissipation (Note 1) @ $T_L = 25^{\circ}C$, Pulse Width = 1 ms | P_{PK} | 600 | W |
| DC Power Dissipation @ $T_L = 75^{\circ}C$ Measured Zero Lead Length (Note 2) Derate Above $75^{\circ}C$ | P_D | 3.0 40 | W mW/ $^{\circ}C$ |
| Thermal Resistance from Junction-to-Lead | $R_{\theta JL}$ | 25 | $^{\circ}C/W$ |
| DC Power Dissipation (Note 3) @ $T_A = 25^{\circ}C$ Derate Above $25^{\circ}C$ | P_D | 0.55 4.4 | W mW/ $^{\circ}C$ |
| Thermal Resistance from Junction-to-Ambient | $R_{\theta JA}$ | 100 | $^{\circ}C/W$ |
| Forward Surge Current (Note 4) @ $T_A = 25^{\circ}C$ | I_{FSM} | 100 | A |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +175 | $^{\circ}C$ |


Stresses exceeding those listed in the Maximum Ratings table may damage the component. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 10/1000 μs , non-repetitive.
- 1" square copper pad, FR-4 board.
- FR-4 board, using Littelfuse minimum recommended footprint
- 1/2 sine wave (or equivalent square wave), PW = 8.3 ms, duty cycle = 4 pulses per minute maximum. For Unidirectional only.

SZP6SMB Series

Surface Mount > 600W


I-V Curve Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 3.5\text{ V Max. @ } I_F$ (Note 5) = 30 A) For Uni-directional

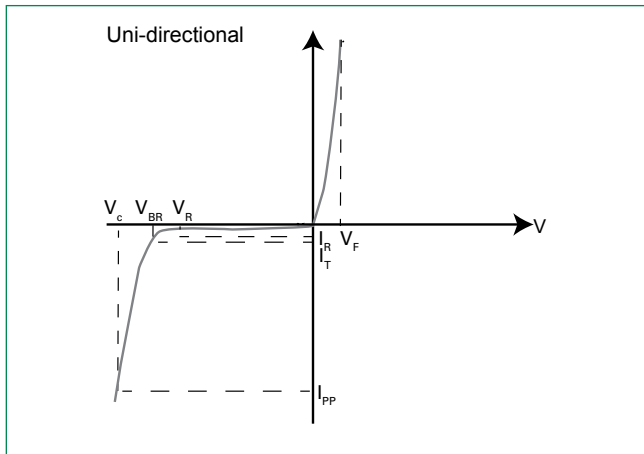

| Symbol | Parameter |
|-----------|---|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | On-State Current |
| V_F | Forward Voltage @ I_F |
| I_F | Forward Current |

5. 1/2 sine wave (or equivalent square wave), $PW = 8.3\text{ ms}$, non-repetitive duty cycle.

I-V Curve Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) – For Bi-directional

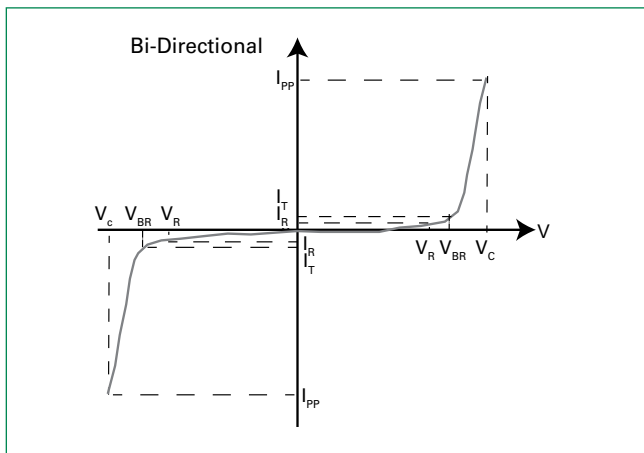

| Symbol | Parameter |
|-----------|---|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |

SZP6SMB Series

Surface Mount > 600W

Electrical Characteristics - For Unidirectional

| Component | Component Marking | Breakdown Voltage | | | | | | $V_C @ I_{PP}$ (Note 8) | | V_{BR} | $C_{Typ.}$ (Note 9) |
|----------------|-------------------|--------------------|-----------------|-----------------------------|-------|-------|---------|-------------------------|----------|----------|---------------------|
| | | V_{RWM} (Note 6) | $I_R @ V_{RWM}$ | $V_{BR} @ I_T$ (V) (Note 7) | | | @ I_T | V_C | I_{PP} | | |
| | | Volts | μA | MIN | NOM | MAX | mA | Volts | Amps | %/°C | pF |
| SZP6SMB6.8AT3G | 6V8A | 5.8 | 1000 | 6.45 | 6.8 | 7.14 | 10 | 10.5 | 57 | 0.057 | 2380 |
| SZP6SMB7.5AT3G | 7V5A | 6.4 | 500 | 7.13 | 7.51 | 7.88 | 10 | 11.3 | 53 | 0.061 | 2180 |
| SZP6SMB8.2AT3G | 8V2A | 7.02 | 200 | 7.79 | 8.2 | 8.61 | 10 | 12.1 | 50 | 0.065 | 2015 |
| SZP6SMB9.1AT3G | 9V1A | 7.78 | 50 | 8.65 | 9.1 | 9.55 | 1 | 13.4 | 45 | 0.068 | 1835 |
| SZP6SMB10AT3G | 10A | 8.55 | 10 | 9.5 | 10 | 10.5 | 1 | 14.5 | 41 | 0.073 | 1690 |
| SZP6SMB11AT3G | 11A | 9.4 | 10.0 | 10.50 | 11.05 | 11.60 | 1 | 15.6 | 38.0 | 0.075 | 1525 |
| SZP6SMB12AT3G | 12A | 10.2 | 5 | 11.4 | 12 | 12.6 | 1 | 16.7 | 36 | 0.078 | 1435 |
| SZP6SMB13AT3G | 13A | 11.1 | 5 | 12.4 | 13.05 | 13.7 | 1 | 18.2 | 33 | 0.081 | 1335 |
| SZP6SMB15AT3G | 15A | 12.8 | 5 | 14.3 | 15.05 | 15.8 | 1 | 21.2 | 28 | 0.084 | 1175 |
| SZP6SMB16AT3G | 16A | 13.6 | 5 | 15.2 | 16 | 16.8 | 1 | 22.5 | 27 | 0.086 | 1110 |
| SZP6SMB18AT3G | 18A | 15.3 | 5 | 17.1 | 18 | 18.9 | 1 | 25.2 | 24 | 0.088 | 1000 |
| SZP6SMB20AT3G | 20A | 17.1 | 5 | 19 | 20 | 21 | 1 | 27.7 | 22 | 0.09 | 910 |
| SZP6SMB22AT3G | 22A | 18.8 | 5 | 20.9 | 22 | 23.1 | 1 | 30.6 | 20 | 0.092 | 835 |
| SZP6SMB24AT3G | 24A | 20.5 | 5 | 22.8 | 24 | 25.2 | 1 | 33.2 | 18 | 0.094 | 775 |
| SZP6SMB27AT3G | 27A | 23.1 | 5 | 25.7 | 27.05 | 28.4 | 1 | 37.5 | 16 | 0.096 | 700 |
| SZP6SMB30AT3G | 30A | 25.6 | 5 | 28.5 | 30 | 31.5 | 1 | 41.4 | 14.4 | 0.097 | 635 |
| SZP6SMB33AT3G | 33A | 28.2 | 5 | 31.4 | 33.05 | 34.7 | 1 | 45.7 | 13.2 | 0.098 | 585 |
| SZP6SMB36AT3G | 36A | 30.8 | 5 | 34.2 | 36 | 37.8 | 1 | 49.9 | 12 | 0.099 | 540 |
| SZP6SMB39AT3G | 39A | 33.3 | 5 | 37.1 | 39.05 | 41 | 1 | 53.9 | 11.2 | 0.1 | 500 |
| SZP6SMB43AT3G | 43A | 36.8 | 5 | 40.9 | 43.05 | 45.2 | 1 | 59.3 | 10.1 | 0.101 | 460 |
| SZP6SMB47AT3G | 47A | 40.2 | 5 | 44.7 | 47.05 | 49.4 | 1 | 64.8 | 9.3 | 0.101 | 425 |
| SZP6SMB51AT3G | 51A | 43.6 | 5 | 48.5 | 51.05 | 53.6 | 1 | 70.1 | 8.6 | 0.102 | 395 |
| SZP6SMB56AT3G | 56A | 47.8 | 5 | 53.2 | 56 | 58.8 | 1 | 77 | 7.8 | 0.103 | 365 |
| SZP6SMB62AT3G | 62A | 53 | 5 | 58.9 | 62 | 65.1 | 1 | 85 | 7.1 | 0.104 | 335 |
| SZP6SMB68AT3G | 68A | 58.1 | 5 | 64.6 | 68 | 71.4 | 1 | 92 | 6.5 | 0.104 | 305 |
| SZP6SMB75AT3G | 75A | 64.1 | 5 | 71.3 | 75.05 | 78.8 | 1 | 103 | 5.8 | 0.105 | 280 |
| SZP6SMB82AT3G | 82A | 70.1 | 5.0 | 77.90 | 82.00 | 86.10 | 1 | 113.0 | 5.3 | 0.105 | 260 |
| SZP6SMB91AT3G | 91A | 77.8 | 5 | 86.5 | 91 | 95.5 | 1 | 125 | 4.8 | 0.106 | 235 |
| SZP6SMB100AT3G | 100A | 85.5 | 5 | 95 | 100 | 105 | 1 | 137 | 4.4 | 0.106 | 215 |
| SZP6SMB120AT3G | 120A | 102 | 5 | 114 | 120 | 126 | 1 | 165 | 3.6 | 0.107 | 185 |
| SZP6SMB130AT3G | 130A | 111 | 5 | 124 | 130.5 | 137 | 1 | 179 | 3.3 | 0.107 | 170 |
| SZP6SMB150AT3G | 150A | 128 | 5 | 143 | 150.5 | 158 | 1 | 207 | 2.9 | 0.108 | 150 |
| SZP6SMB160AT3G | 160A | 136 | 5 | 152 | 160 | 168 | 1 | 219 | 2.7 | 0.108 | 140 |
| SZP6SMB180AT3G | 180A | 154 | 5 | 171 | 180 | 189 | 1 | 246 | 2.4 | 0.108 | 130 |
| SZP6SMB200AT3G | 200A | 171 | 5 | 190 | 200 | 210 | 1 | 274 | 2.2 | 0.108 | 115 |

SZP6SMB Series

Surface Mount > 600W

Electrical Characteristics - For Bidirectional

| Component | Component Marking | V_{RWM} (Note 6) | I_R @ V_{RWM} | Breakdown Voltage | | | | V_C @ I_{PP} (Note 8) | | V_{BR} | $C_{Typ.}$ (Note 9) |
|----------------|-------------------|-----------------------|----------------------|-------------------------------|-------|-------|---------|------------------------------|----------|----------|------------------------|
| | | | | V_{BR} @ I_T (V) (Note 7) | | | @ I_T | V_C | I_{PP} | | |
| | | | | MIN | NOM | MAX | mA | Volts | Amps | | |
| SZP6SMB11CAT3G | 11C | 9.4 | 5 | 10.5 | 11.05 | 11.6 | 1 | 15.6 | 38 | 0.075 | 865 |
| SZP6SMB12CAT3G | 12C | 10.2 | 5 | 11.4 | 12 | 12.6 | 1 | 16.7 | 36 | 0.078 | 800 |
| SZP6SMB13CAT3G | 13C | 11.1 | 5.0 | 12.40 | 13.05 | 13.70 | 1 | 18.2 | 33.0 | 0.081 | 750 |
| SZP6SMB15CAT3G | 15C | 12.8 | 5 | 14.3 | 15.05 | 15.8 | 1 | 21.2 | 28 | 0.084 | 645 |
| SZP6SMB16CAT3G | 16C | 13.6 | 5 | 15.2 | 16 | 16.8 | 1 | 22.5 | 27 | 0.086 | 610 |
| SZP6SMB18CAT3G | 18C | 15.3 | 5 | 17.1 | 18 | 18.9 | 1 | 25.2 | 24 | 0.088 | 545 |
| SZP6SMB20CAT3G | 20C | 17.1 | 5 | 19 | 20 | 21 | 1 | 27.7 | 22 | 0.09 | 490 |
| SZP6SMB22CAT3G | 22C | 18.8 | 5 | 20.9 | 22 | 23.1 | 1 | 30.6 | 20 | 0.09 | 450 |
| SZP6SMB24CAT3G | 24C | 20.5 | 5 | 22.8 | 24 | 25.2 | 1 | 33.2 | 18 | 0.094 | 415 |
| SZP6SMB27CAT3G | 27C | 23.1 | 5 | 25.7 | 27.05 | 28.4 | 1 | 37.5 | 16 | 0.096 | 370 |
| SZP6SMB30CAT3G | 30C | 25.6 | 5 | 28.5 | 30 | 31.5 | 1 | 41.4 | 14.4 | 0.097 | 335 |
| SZP6SMB33CAT3G | 33C | 28.2 | 5 | 31.4 | 33.05 | 34.7 | 1 | 45.7 | 13.2 | 0.098 | 305 |
| SZP6SMB36CAT3G | 36C | 30.8 | 5 | 34.2 | 36 | 37.8 | 1 | 49.9 | 12 | 0.099 | 280 |
| SZP6SMB39CAT3G | 39C | 33.3 | 5 | 37.1 | 39.05 | 41 | 1 | 53.9 | 11.2 | 0.1 | 260 |
| SZP6SMB43CAT3G | 43C | 36.8 | 5 | 40.9 | 43.05 | 45.2 | 1 | 59.3 | 10.1 | 0.101 | 240 |
| SZP6SMB47CAT3G | 47C | 40.2 | 5 | 44.7 | 47.05 | 49.4 | 1 | 64.8 | 9.3 | 0.101 | 220 |
| SZP6SMB51CAT3G | 51C | 43.6 | 5 | 48.5 | 51.05 | 53.6 | 1 | 70.1 | 8.6 | 0.102 | 205 |
| SZP6SMB56CAT3G | 56C | 47.8 | 5 | 53.2 | 56 | 58.8 | 1 | 77 | 7.8 | 0.103 | 185 |
| SZP6SMB62CAT3G | 62C | 53 | 5 | 58.9 | 62 | 65.1 | 1 | 85 | 7.1 | 0.104 | 170 |
| SZP6SMB68CAT3G | 68C | 58.1 | 5 | 64.6 | 68 | 71.4 | 1 | 92 | 6.5 | 0.104 | 155 |
| SZP6SMB75CAT3G | 75C | 64.1 | 5.0 | 71.30 | 75.05 | 78.80 | 1 | 103.0 | 5.8 | 0.105 | 140 |
| SZP6SMB82CAT3G | 82C | 70.1 | 5 | 77.9 | 82 | 86.1 | 1 | 113 | 5.3 | 0.105 | 130 |
| SZP6SMB91CAT3G | 91C | 77.8 | 5.0 | 86.50 | 91.00 | 95.50 | 1 | 125.0 | 4.8 | 0.106 | 120 |

6. A transient suppressor is normally selected according to the working peak reverse voltage (V_{RWM}), which should be equal to or greater than the DC or continuous peak operating voltage level.

7. V_{BR} measured at pulse test current I_T at an ambient temperature of 25°C.

8. Surge current waveform per Figure 2 and derate per Figure 3 of the General Data - 600 Watt at the beginning of this group.

9. Bias Voltage = 0 V, F = 1 MHz, T_J = 25°C

SZP6SMB Series

Surface Mount > 600W

Ratings and Characteristic Curves - For Unidirectional

Figure 1.
Pulse Rating Curve

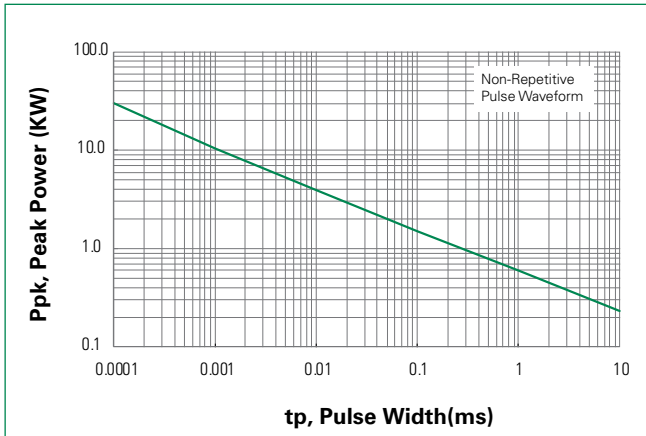


Figure 2.
Pulse Waveform

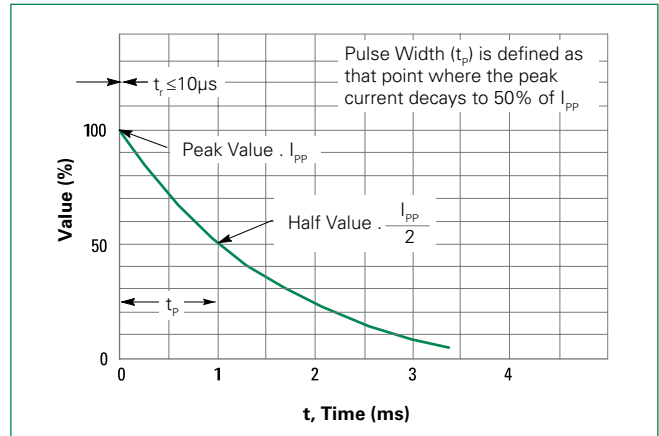


Figure 3.
Surge Derating Curve

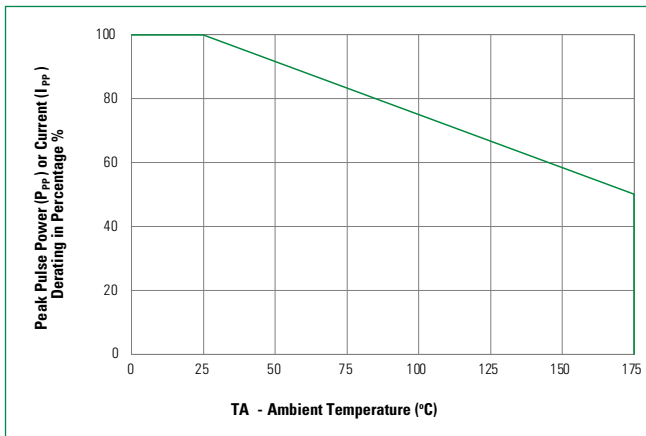


Figure 4.
Typical Junction Capacitance vs. Bias Voltage

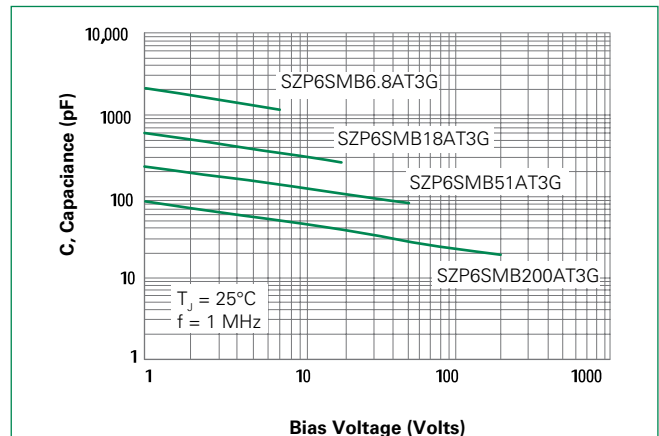


Figure 5.
Typical Junction Capacitance vs. Bias Voltage


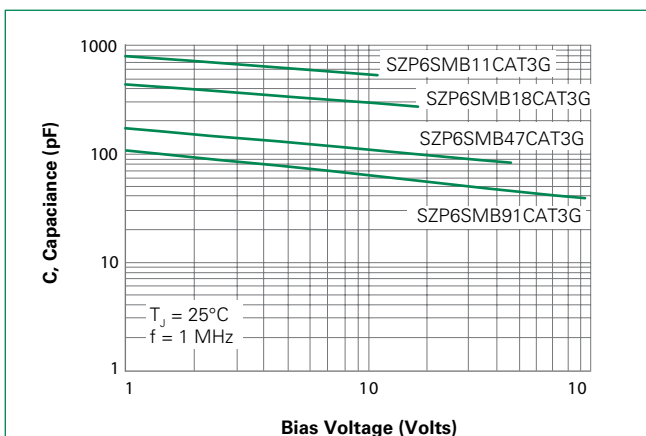


Figure 6.
Typical Protection Circuit

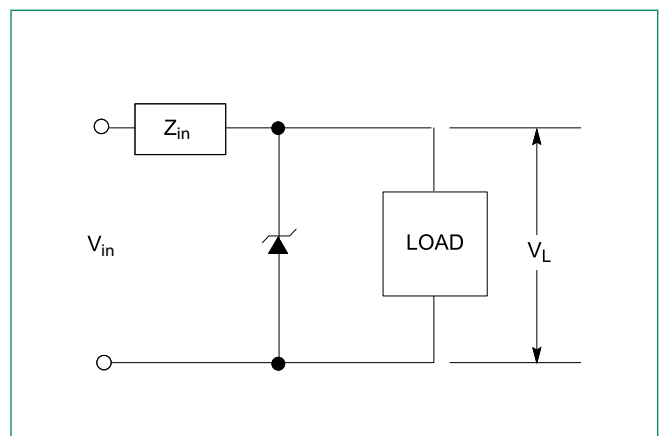


SZP6SMB Series

Surface Mount > 600W

Soldering Parameters

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_p) | 60 – 120 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/second max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Time (min to max) (t_l) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 30 seconds max |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes max. |
| Do not exceed | | 260°C |

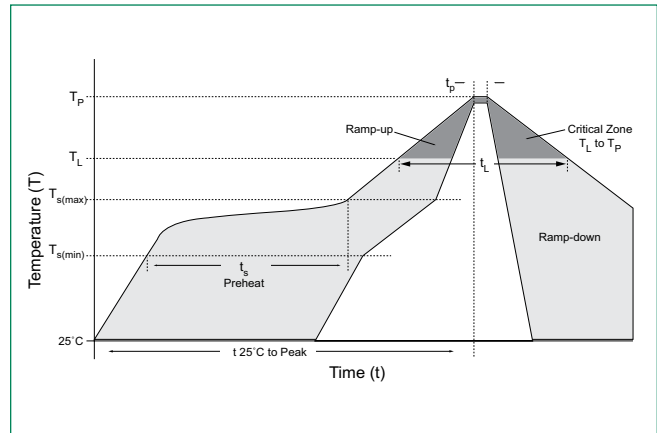


Physical Specifications

| | |
|-----------------|---|
| Weight | 0.00326 ounce, 0.1015 grams |
| Case | JEDEC DO214AA. Void-Free, Transfer-Molded, Thermosetting Plastic Epoxy Meets UL 94V-0 |
| Polarity | Color band denotes cathode for unidirectional components. |
| Terminal | Matte Tin-plated leads, Solderable per JESD22-B102 |

Environmental Specifications


| | |
|----------------------------|--------------------------|
| High Temp. Storage | JESD22-A103 |
| HTRB | JESD22-A108 |
| Temperature Cycling | JESD22-A104 |
| MSL | JEDEC-J-STD-020, Level 1 |
| H3TRB | JESD22-A101 |
| RSH | JESD22-A111 |

Dimensions

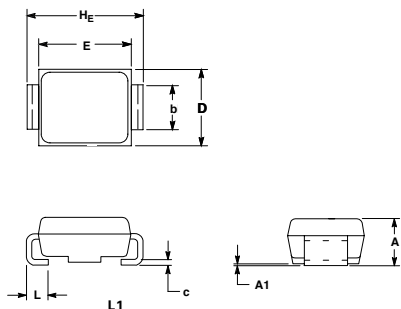

| Dim | Inches | | | Millimeters | | |
|-----------|-----------|-------|-------|-------------|------|------|
| | Min | Nom | Max | Min | Nom | Max |
| A | 0.077 | 0.091 | 0.097 | 1.95 | 2.30 | 2.47 |
| A1 | 0.002 | 0.004 | 0.008 | 0.05 | 0.10 | 0.20 |
| b | 0.077 | 0.080 | 0.087 | 1.96 | 2.03 | 2.20 |
| c | 0.006 | 0.009 | 0.012 | 0.15 | 0.23 | 0.31 |
| D | 0.130 | 0.140 | 0.156 | 3.30 | 3.56 | 3.95 |
| E | 0.160 | 0.170 | 0.181 | 4.06 | 4.32 | 4.60 |
| HE | 0.205 | 0.214 | 0.220 | 5.21 | 5.44 | 5.60 |
| L | 0.030 | 0.040 | 0.063 | 0.76 | 1.02 | 1.60 |
| L1 | 0.020 REF | | | 0.51 REF | | |

Soldering Footprint

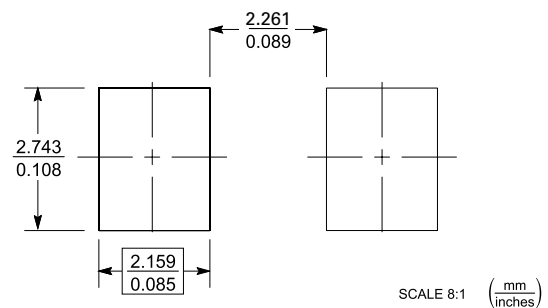

Ordering Information

| Device | Package | Shipping |
|-----------------|---------------|---------------------|
| SZP6SMBxxxAT3G | SMB (Pb-Free) | 2,500 / Tape & Reel |
| SZP6SMBxxxCAT3G | SMB (Pb-Free) | 2,500 / Tape & Reel |

SZP6SMB Series


Surface Mount > 600W

Part Marking System





XXXX =Device Code (max four digits)
Y =Year
M =Month
A =Assembly Location
WW =Lot Code

Part Numbering System

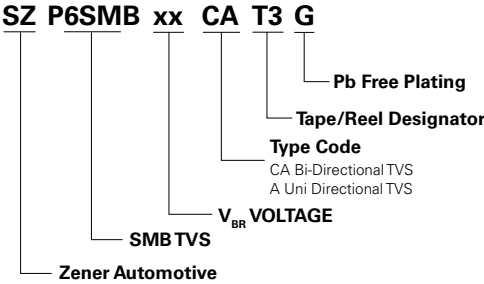

Tape and Reel Specification

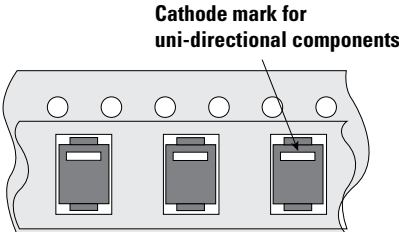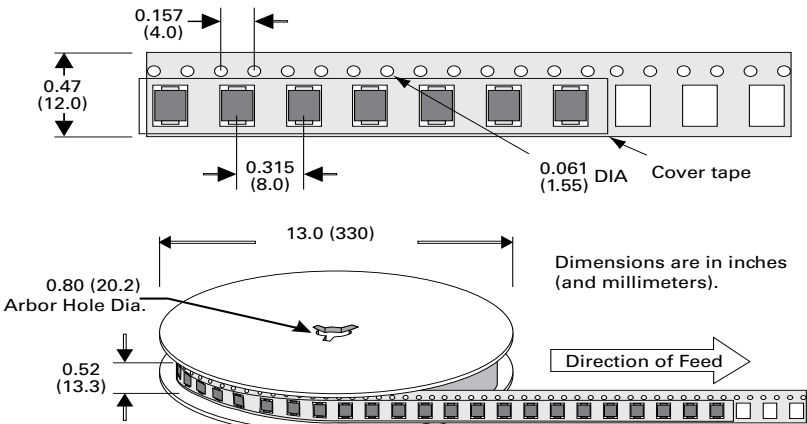

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.