







REV	CONTENT	CHK	DATE
VO.0	CONTENT	LZW	23.03.27

NOTES:

1. Material: PA66 UL94V-0;
2. The surface shall not have material flowers, shrinkage, deformation, lack of material, distortion, color and other adverse phenomena;
3. Ambient temperature: -40~+105℃
- 4."★" is the key quality control point.



- ① Series NO.
- ② Pitch
- ③ 1 Single Pitch
- ④ Color: 1 Grey  
2 Blue  
3 Black  
4 Green  
5 Orange  
6 Red  
7 Transparent  
8 Yellow  
9 White
- ⑤ Customer Request: 00--standard

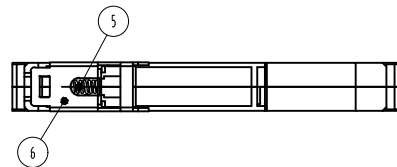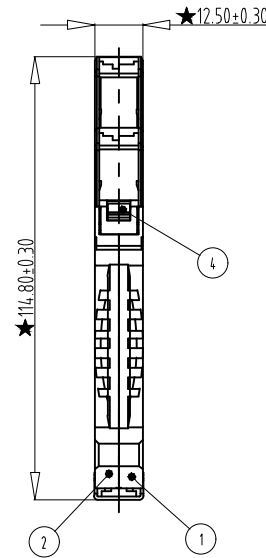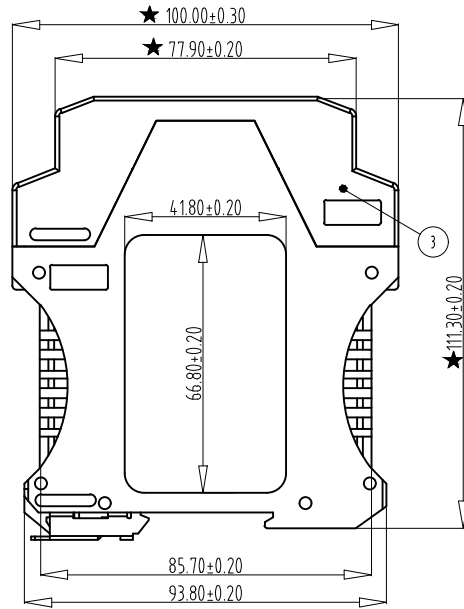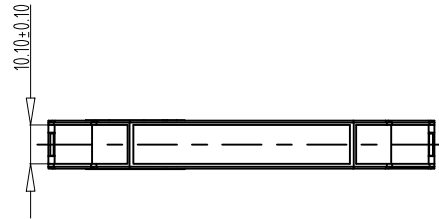

6	SPRING	XXXXXX	1	STEEL	/
5	Spring	XXXXXX	2	Stainless steel	Zn Plated
4	CLASP	XXXXXX	1	PA66 UL94V-0	SEE NOTE
3	COVER-TOP	XXXXXX	1	PA66 UL94V-0	SEE NOTE
2	HOUSING-LEFT	XXXXXX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING-RIGTT	XXXXXX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	23.03.27	SCALE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GTKT-12.5-XX-00
				DWGNO.	XXXX

**Golten** 宁波冠泰电子有限公司  
NINGBO GOLTEN ELECTRONICS CO., LTD.

Total Pitch Tolerances in mm								Nominal dimension range in mm								⊥	≡	—	//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 100	over 150	
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 320	to 10	to 100	to 150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.5