


RoHS

Compatible


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

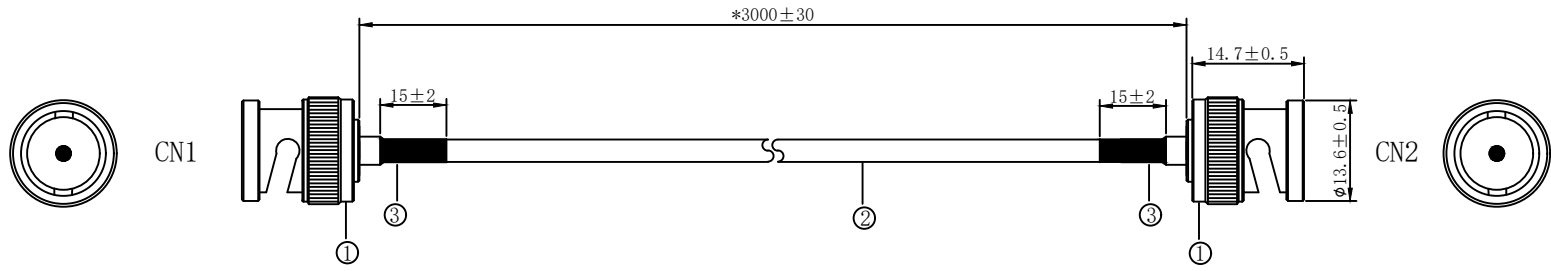

WIRE LIST

<u>CN1</u>		<u>CN2</u>
CENTER	COAXIAL	CENTER
SHELL	BRAID SHIELD	SHELL

1. TEST
 - a. OPEN&SHORT TEST
 - b. MISS WIRE
 - c. TEST MACHINE: 8080A&RT-9000L
 - d. TEST CONDITION:
CONTACT RESISTANCE: 5ohm
INSULATION RESISTANCE: 5M ohm
WTHSTANDING VOLTAGE: DC 300V
2. PACKING: 50PCS/PE BAG

TITLE: BNC/M-M+RG179 L=3000mm			
PART NO: BNCM8-903MH-BNCM8		DWG NAME: BNCM8-903MH-BNCM8	
APPROVED BY	CHECKED BY	DESIDNED BY	 Tolerance X.X ±0.2 X.XX ±0.1 X° ±1°
		2025/01/15	
		UNITS: mm SCALE: 1/1 REVISION: R	

3	MW-TUBE-03	Heat shrinkable tube φ 3.0 Black L=15mm	2	PCS
2	MW-RG179-01	RG179 φ2.5mm coaxial cable brownish red	3	M
1	MW-BNC8-01	180° BNC jack bulkhead Copper nickel plating	2	PCS
SN	Part number	Material name specification	Q'ty	Unit