
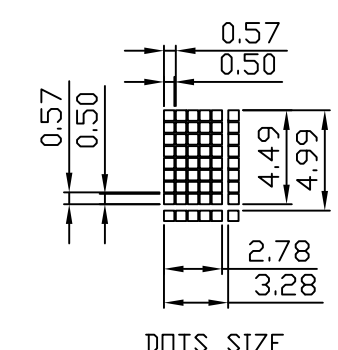
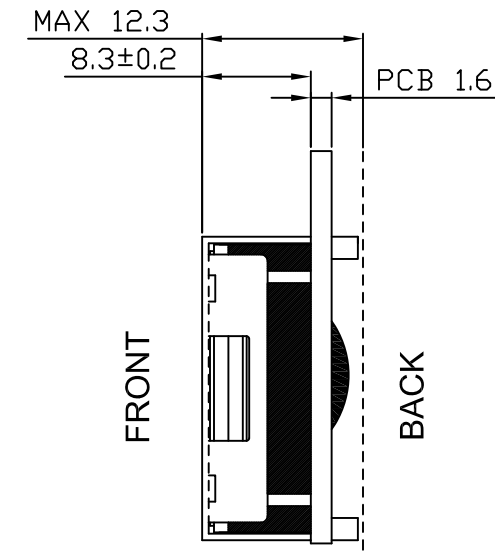


MECHANICAL TOL.±0.2 UNIT: mm

VER	REVISION RECORD	DATE
A	First issue	2018.09.05

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

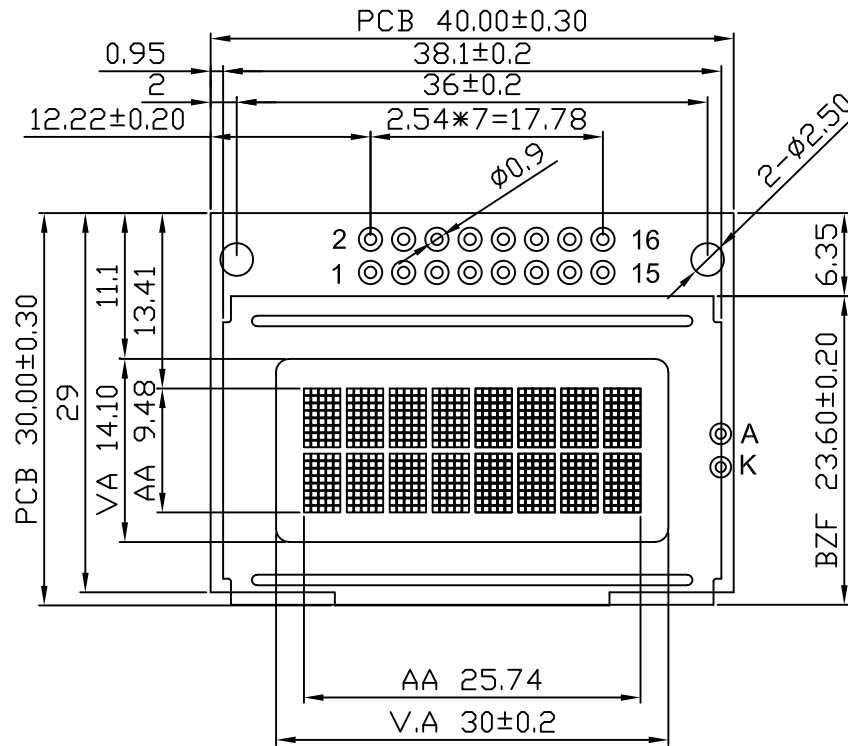

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSFLECTIVE 2). DUTY:1/16.
- BIAS:1/5. VOP=4.7V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). DRIVE IC:AIP31066L
- 6). DRIVE POWER: VDD=5.0V
- 7). BACKLIGHT: Y-G

<b>CUSTOMER APPROVAL</b>

1  
2  
3  
4  
5