

A

B

C

D

E

F






G

MECHANICAL TOL.±0.2

UNIT: mm

VER	REVISION RECORD	DATE
A	First issue	2024.10.11

PIN Assignment	
1	/CS1
2	/RES
3	A0
4	/WR(R/W)
5	/RD(E)
6	DO
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	CAP5-
18	CAP3-
19	CAP1+
20	CAP1-
21	CAP2+
22	CAP2-
23	CAP4-
24	VRS
25	V1
26	V2
27	V3
28	V4
29	V5
30	VR
31	C86
32	P/S
33	/HPM
34	IRS

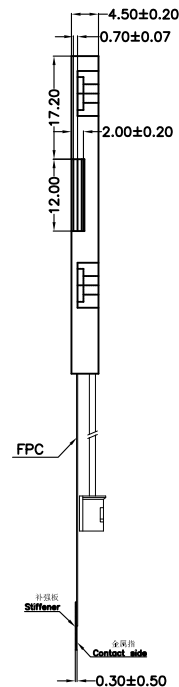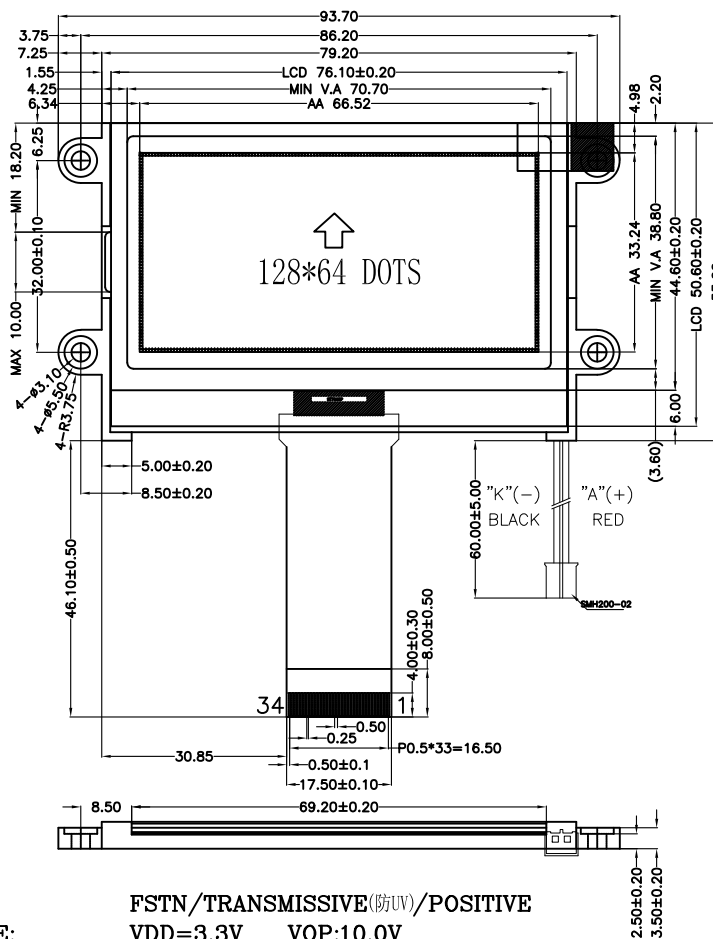

NOTES:

- DISPLAY TYPE: FSTN/TRANSMISSIVE(防UV)/POSITIVE
- OPERATING VOLTAGE: VDD=3.3V VOP:10.0V
- OPERATING TEMPERATURE: -30°C~+80°C
- STORAGE TEMPERATURE: -35°C~+85°C
- DRIVE MODE: 1/64DUTY 1/9BIAS
- VIEWING DIRECTION: 6 O'CLOCK
- LED BACKLIGHT: White COLOR, VF=3.3V(IF=40mA)
- DRIVE CONTROL IC: ST7565P
- FPC suggested connector: ETC-FC07-FC07-S34ECA-00 or compatible
- CUSTOMER INFORMATION: --

CUSTOMER APPROVAL

Palm Technology Co., Ltd.

MODEL
P241004I

DWG NO

VER

PAGE

APPROVAL

CHECK

DRAWING

ALLEN