
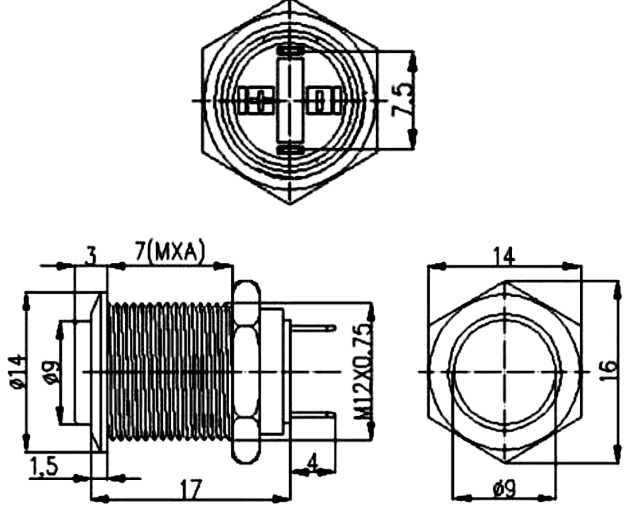


Photo		Drawing	
		Dimensions in mm 	
		PRZ W12H11/C.	
尾部配置	Tail Configuration	Terminal	
绝缘强度	Dielectric Intensity	2000VAC	
环境温度	Ambient Temperature	-20 °C~+55 °C	
面板厚度	Panel Thickness	1~10mm	
螺母扭矩	Nut Torque	5~14Nm	
防护等级	Protection Level	IP65,IK08	
开关规格	Switch Specification	1 A/250VAC	
安装孔径	Mounting Hole	12mm	
头部形状	Head Type	High Flat	
操作行程	Operation Stroke	About 2.5mm	
机械寿命	Mechanical life	more than 500,000 cycles	
电器寿命	Electrical life	more than 50,000 cycles	
功能	Function	1NO Momentary	
材料 Material	触点	Contact	Silver alloy
	按钮	Enclosure	Copper
	基座	Base	PA66
LED 灯珠参数	灯珠类型	LED type	/
	额定电压	Rated voltage	/
	额定电流	Rated current	/
	灯珠颜色	LED color	/
	灯珠寿命	LED life	/