


PUSHBUTTONS



PRZ W19B10R/S

- Φ 19mm diameter
- Switch Rating:2A/36VAC
- Contact Configuration:1NO
- Operation Type:Momentary
- The Front Shape:Domed
- The Crust Material:Stainless Steel
- IP Degree:IP65

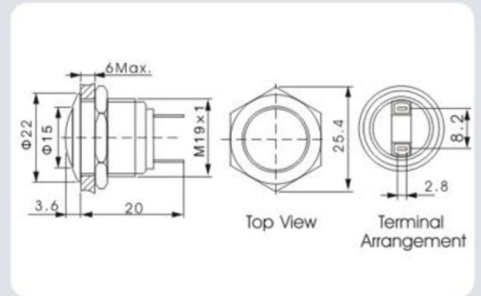


PUSHBUTTONS



PRZ W19F10R/S

- Φ 19mm diameter
- Switch Rating:2A/36VAC
- Contact Configuration:1NO
- Operation Type:Momentary
- The Front Shape:Flat Round
- The Crust Material:Stainless Steel
- IP Degree:IP65

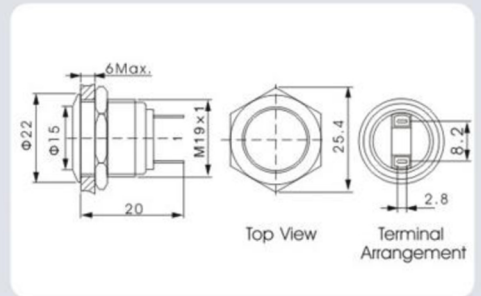


PUSHBUTTONS



PRZ W19H10R/S

- Φ 19mm diameter
- Switch Rating:2A/36VAC
- Contact Configuration:1NO
- Operation Type:Momentary
- The Front Shape:High Round
- The Crust Material:Stainless Steel
- IP Degree:IP65

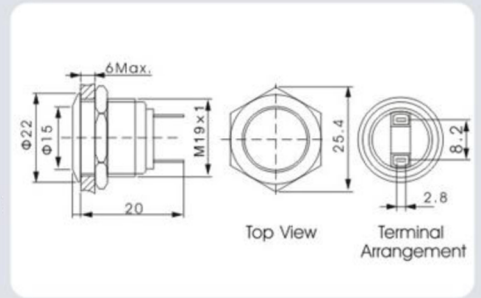

Specification	PRZ W19B10R/S	PRZ W19F10R/S	PRZ W19H10R/S
The Front Shape	Domed	Flat Round	High Round
Terminal Type	Pin Terminal(2.8 × 0.5mm)	Pin Terminal(2.8 × 0.5mm)	Pin Terminal(2.8 × 0.5mm)
Switching	No.1	No.1	No.1
Max.Switch Rating	2A/36VDC	2A/36VDC	2A/36VDC
Contact Resistance	≤ 50mΩ	≤ 50mΩ	≤ 50mΩ
Insulating Resistance	≥ 1000MΩ	≥ 1000MΩ	≥ 1000MΩ
Dielectric Strength	2000VAC	2000VAC	2000VAC
Operating Temp	-20℃~+55℃	-20℃~+55℃	-20℃~+55℃
Mechanical life	1,000,000cycles	1,000,000cycles	1,000,000cycles
Electrical life	200,000cycles	200,000cycles	200,000cycles
Panel Thickness	1~6mm	1~6mm	1~6mm
Torque	5~14Nm	5~14Nm	5~14Nm
Operation Pressure	About4N	About4N	About4N
Operation Distance	About1.5mm	About1.5mm	About1.5mm
IP Degree	IP65	IP65	IP65
Material	Contact	Silver Alloy	Silver Alloy
	Button	Stainless Steel	Stainless Steel
	Body	Stainless Steel(Nickel Plated,Gold Plated)	Stainless Steel(Nickel Plated,Gold Plated)
	Base	PBT	PBT