
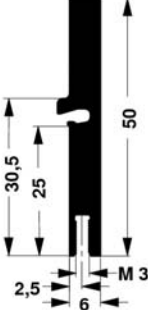
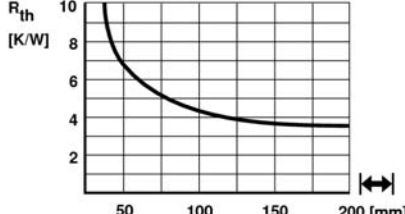


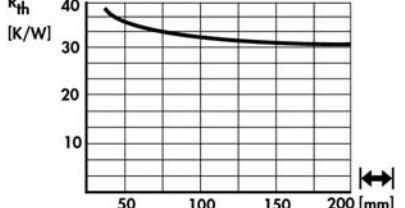


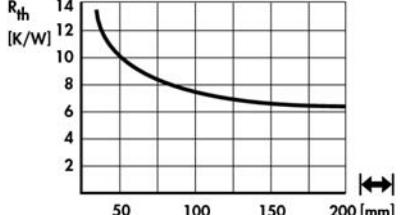

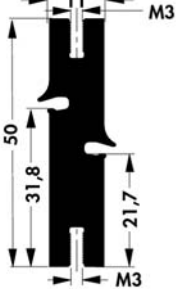
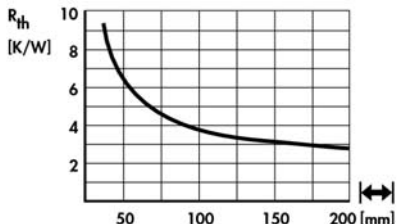


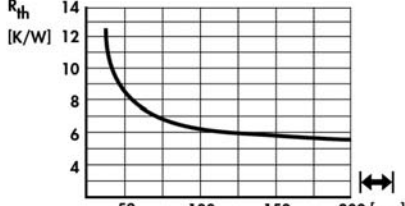


Extruded heatsinks for lock-in retaining spring

art. no. SK 575 ...			
please indicate: ... \longleftrightarrow 25 37.5 50 75 84 100 1000 mm			
art. no. SK 512 ...			
please indicate: ... \longleftrightarrow 25 50 100 1000 mm			
art. no. SK 480 ...			
please indicate: ... \longleftrightarrow 25 37.5 50 75 84 100 1000 mm			
art. no. SK 490 ...			
please indicate: ... \longleftrightarrow 37.5 50 75 84 100 1000 mm			
art. no. SK 492 ...			
please indicate: ... \longleftrightarrow 25 37.5 50 75 84 100 1000 mm			


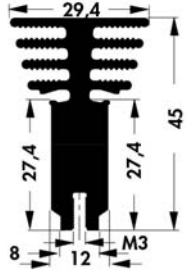
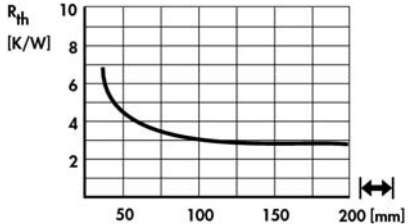

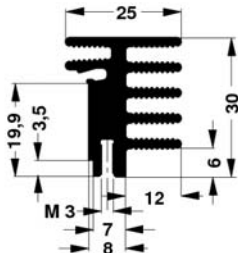
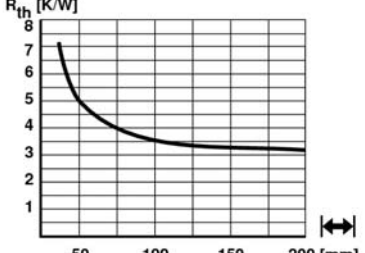

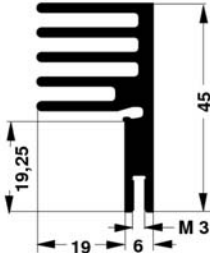
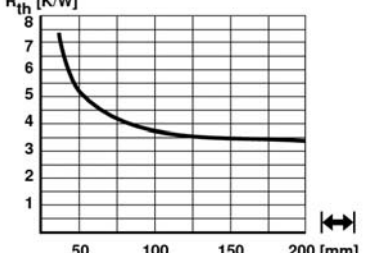

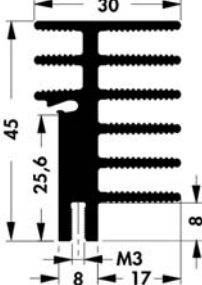
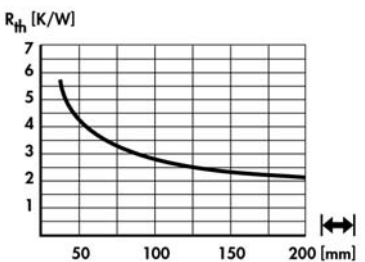
please note: profile threads \rightarrow A 4

A 85

Mounting material for semiconductor. \rightarrow E 37 – 41
 Insulator caps \rightarrow E 43
 Mounting pads \rightarrow E 39
 Lock-in transistor fixing spring \rightarrow A 117

Heatsinks for PCB \rightarrow A 89
 Profiles for PCB components \rightarrow A 91
 Heatsinks with threaded rail \rightarrow A 92
 Mounting parts for heatsinks \rightarrow E 42 – 43

Extruded heatsinks for lock-in retaining spring

<p>art. no.</p> <p>SK 489 ...</p>			
<p>please indicate: ... [↔]</p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 573 ...</p>			
<p>please indicate: ... [↔]</p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 576 ...</p>			
<p>please indicate: ... [↔]</p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 481 ...</p>			
<p>please indicate: ... [↔]</p> <p>25 37.5 50 75 84 100 1000 mm</p>			

please note: profile threads → A 4

Mounting material for semiconduct. → E 37 - 41
 Insulator caps → E 43
 Mounting pads → E 39
 Lock-in transistor fixing spring → A 117

Heatsinks for PCB → A 89
 Profiles for PCB components → A 91
 Heatsinks with threaded rail → A 92
 Mounting parts for heatsinks → E 42 - 43

A 86

A

B

C

D

E

F

G

H

I


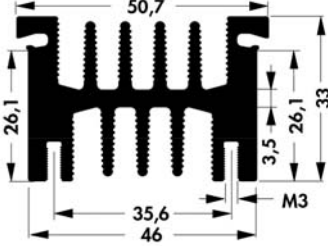
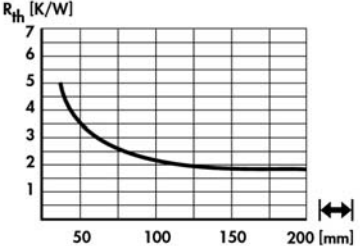

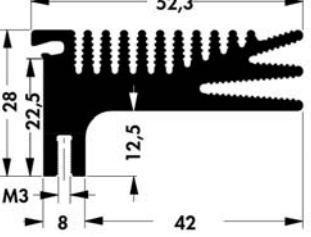
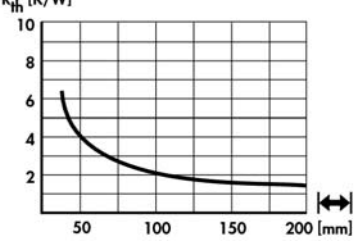

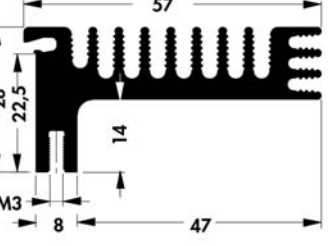
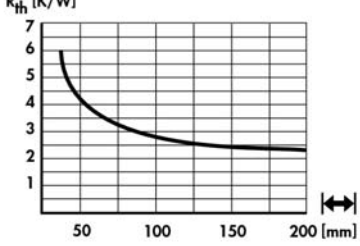
K

L

M

N


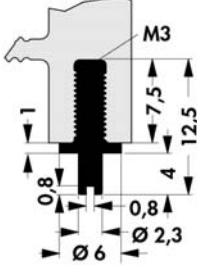

Extruded heatsinks for lock-in retaining spring

art. no. SK 499 ...			
please indicate: ... [mm] 25 37.5 50 75 100 1000 mm			
art. no. SK 487 ...			
please indicate: ... [mm] 25 37.5 50 75 84 100 1000 mm			
art. no. SK 483 ...			
please indicate: ... [mm] 25 37.5 50 75 84 100 1000 mm			

please note: profile threads → A 4

screw-in solder pin ELS 3

- screw in solder pin made of brass
- easy mounting
- secure hold
- surface covering suitable for soldering
- suitable for all heatsinks with M3 profile thread
- position in the threaded channel as required

art. no. ELS 3			
-------------------------------------	---	---	---

specific designs on customer's request

Mounting material for semiconduct. → E 37 – 41
 Insulator caps → E 43
 Mounting pads → E 39
 Lock-in transistor fixing spring → A 117

Heatsinks for PCB → A 89
 Profiles for PCB components → A 91
 Heatsinks with threaded rail → A 92
 Mounting parts for heatsinks → E 42 – 43

A 88