

# GQ16

## Metal Push Button



### Part-number Description

Code of series	The Front shape	Contact structure	Lamp type	Connet type	Lamp color and colorized button	Lamp voltage	Crust material
GQ16	★	□	◇	◆	△	▲	◎
	<b>B</b> Domed <b>F</b> Flat Round <b>H</b> High Round <b>PF</b> Super Flat Head + Flat Button <b>PH</b> Super Flat Head + High Flat Button	10 1NO 01 1NC  <b>1NC can be made to order for some products</b>  <b>No letter means signal lamp</b>	<b>D</b> Dot <b>E</b> Ring  <b>No letter means screw terminal</b>	<b>J</b> Pin terminal <b>L</b> Long Pin Terminal  <b>No letter means screw terminal</b>	<b>R</b> Red <b>G</b> Green <b>Y</b> Yellow <b>O</b> Orange <b>B</b> Blue <b>W</b> White <b>N</b> Black	AC/DC 6V AC/DC 12V AC/DC 24V AC/DC 36V  <b>Note: Other voltage can be made to order</b>	<b>N</b> Nickel-plated Brass <b>S</b> Stainless steel <b>A</b> Stainless steel <b>PC</b> Engineering plastic <b>Cr</b> Chrome-plated (made to order)

**Note:** Pls read the catalogue carefully, and choose the right part-number according to the sign.

### Specifications

<b>Operating Temperature</b>	-25°C~+55°C(no freezing) keep the air flowing around illuminated pushbutton
<b>Operating Humidity</b>	45~85%RH(no condensation)
<b>Contact Resistance</b>	≤50mΩ
<b>Insulation Resistance</b>	≥1000MΩ
<b>Dielectric Strength</b>	2000V,A C50Hz,5 seconds
<b>Vibration Resistance</b>	50Hz,Amplitude 1.2mm
<b>Shock Resistance</b>	> 10g
<b>Solder Heat Resistance</b>	320°C(or 30W soldering iron) no more than 2 seconds)

### Standard and Certification

Standard	Certification Mark	Certificate Authority /Certification Number
EN61058-1:2002+A2:2008	CE	VOV/VT11018807
EN60947-1:2004	CE	CTS/CTS070706-01006-E

### Switching Operation

Type	X	Y
<b>Sign</b>		
<b>Diagram</b>		

Note: Using two terminals, double-break and slow-motion contact

**Y type NC switch can be made to order for individual product, pls check the product description.**

### Lamp Ratings


<b>Lamp Type</b>	LED lamp(AC/DC)
<b>Led Color</b>	<b>R</b> <b>G</b> <b>Y</b> <b>O</b> <b>B</b> <b>W</b>
<b>Life</b>	40000 hours ( Reference )
<b>Rated Voltage</b>	AC/DC6V,AC/DC12V,AC/DC24V,AC/DC36V
<b>Rated Current</b>	About 15mA
<b>DroppingWay</b>	External resistance
<b>Lamp Circuit Diagram</b>	Using AC/DCLed lamp, the terminals have no difference of anode and cathode. 

**Note:** DC LED and other voltage can be made to order.




GQ16F-10D/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16F-D/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

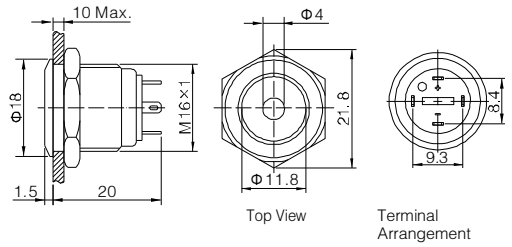


GQ16H-10D/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16H-D/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

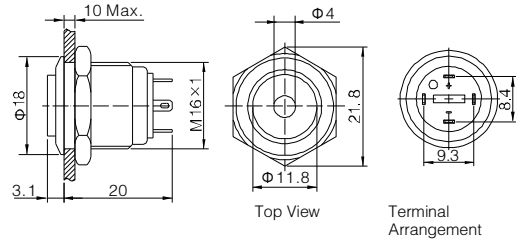


GQ16B-10D/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16B-D/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

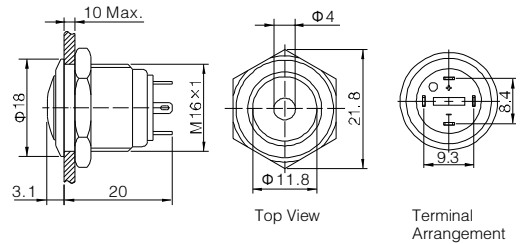


GQ16F-10E/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16F-E/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

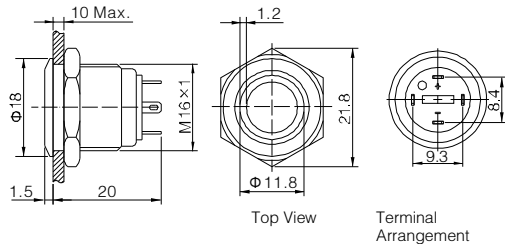


GQ16H-10E/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16H-E/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

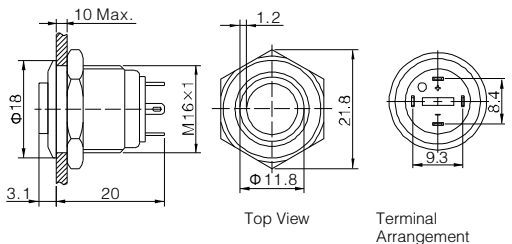

GQ16B-10E/J/Δ/▲/○

- ⊙ For signal lamp, part number is: GQ16B-E/J/Δ/▲/○
- ⊙ Φ 16mm Diameter
- ⊙ Switch Rating: 2A/36VDC
- ⊙ Contact Configuration: 1NO
- ⊙ Operation Type: Momentary
- ⊙ LED Color(Δ): **R G Y O B W**
- ⊙ LED Voltage(▲): 6V/12V/24V/36V(need external resistance)
- ⊙ The Crust Material(○): Stainless steel(S)/ Aluminium alloy black anodized(A)
- ⊙ IP Degree: IP65, IK08

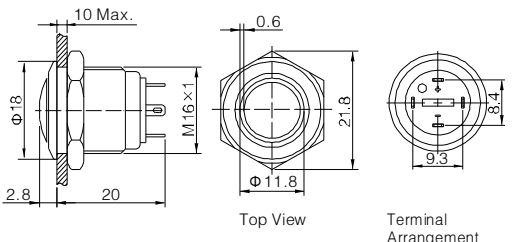

<b>GQ16F-10D/J/Δ/▲/○</b> <b>GQ16H-10D/J/Δ/▲/○</b> <b>GQ16B-10D/J/Δ/▲/○</b>		<b>GQ16F-10E/J/Δ/▲/○</b> <b>GQ16H-10E/J/Δ/▲/○</b> <b>GQ16B-10E/J/Δ/▲/○</b>	
<b>Terminal Type</b>	Pin Terminal(2×0.5mm)	<b>Material</b>	<b>Button</b>
<b>Switching</b>	x(double-break slow-motion contact)		Stainless steel/ Aluminium alloy black anodized
<b>Panel Thickness</b>	1~6mm		<b>Body</b>
			Stainless steel/ Aluminium alloy black anodized
<b>Torque</b>	0.6Nm		<b>Base</b>
			PBT
<b>Mechanical Life</b>	1,000,000 cycles	<b>Made to order</b>	About 4N
<b>Electrical Life</b>	200,000 cycles	<b>Operation Travel</b>	About 2.5mm
		<b>RoHS</b>	Made to order

<b>Lamp Ratings</b>	<b>Lamp Type</b>	dot illuminated/ring illuminated(LED)				
	<b>Led Color</b>	<b>R Y O</b>	<b>G B W</b>			
	<b>Rated Voltage<sub>Ue</sub></b>	AC/DC 1.8V		AC/DC 2.8V		
	<b>Rated Current</b>	15mA				
	<b>Life</b>	40000 hours				
<b>Current-Limiting Resistance Configuration Table</b>	<b>Operating Voltage(U)</b>	6V	12V	24V	36V	
	<b>Current-Limiting Resistance (R)</b>	<b>R Y O</b>	270 Ω, 1/4W	820 Ω, 1/2W	1.5K Ω, 1W	2.7K Ω, 1W
		<b>G B W</b>	220 Ω, 1/4W	680 Ω, 1/2W	1.5K Ω, 1W	2.7K Ω, 1W