

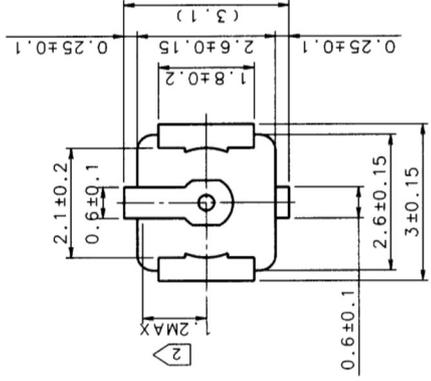

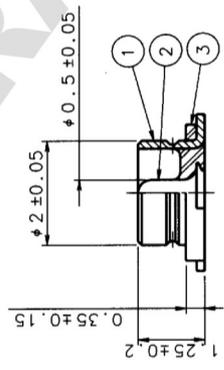



1	2	3	4	5	6	7	8
COUNT DESCRIPTION OF REVISIONS	BY CHKD	DATE	COUNT DESCRIPTION OF REVISIONS	BY CHKD	DATE	COUNT DESCRIPTION OF REVISIONS	BY CHKD



RECOMMENDED PC BOARD PATTERN DRAWING(S:1)



MOUNTING TEMPERATURE PROFILE (REFERENCE)

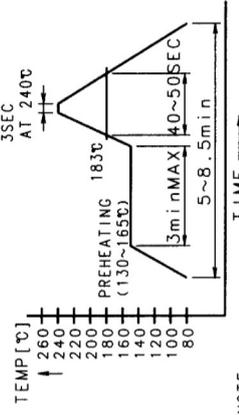

NOTE
MOUNTING TEMPERATURE PROFILE VARIES ACCORDING TO BOARD SIZE, SOLDER TYPE APPLIED AND SOLDER THICKNESS.

NOTES:

- 1: THE QUANTITY OF U.FL-R-SMT(01) IS 100 CONNECTORS PER PACK.
- 2: THIS DIMENSION SHOWS THE ALLOWABLE RANGE THAT THE RESIN IS PUT OVER THE CENTER CONTACT.
- 3: LEAD CO-PLANARITY SHALL BE 0.1MAX.
- 4: FOR THE POSSIBILITY OF BREAKAGE OR DEFORMATION, DO NOT MATE THIS CONNECTOR WITH PARTNER, U.FL-LP-*** BEFORE MOUNTING ON PC BOARD.

2	BRASS	GOLD PLATING	3	LCP	(BEIGE),UL94V-0
1	PHOSPHOR BRONZE	SILVER PLATING	3	LCP	(BEIGE),UL94V-0
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CL	CL	CL	CL	CL	CL
DESIGNED	DRAWN		CHECKED	APPROVED	RELEASED
<i>M. Yamane</i>	<i>M. Yamane</i>		<i>M. Yamane</i>	<i>M. Yamane</i>	<i>M. Yamane</i>
98.4.16	98.4.16		98.4.16	98.4.16	98.4.16
DRAWING NO. U.FL-R-SMT(01)					
SCALE 1:1					
UNITS mm					
DRAWING NO. EDC3-131821-01					
PART NO. U.FL-R-SMT(01)					
CODE NO. CL331-0471-0-01					
1/1					

TO	
RF	