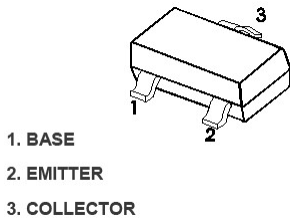


SOT-23
SOT-23 贴片塑封三极管
SOT-23 Plastic-Encapsulate Transistors

Marking: G1
特征 Features

- 与 MMBT5401 配对; Complementary to MMBT5401
- 最大功率耗散 300mW; Power Dissipation of 300mW
- 高稳定性和可靠性。High Stability and High Reliability

机械数据 Mechanical Data

- 封装: SOT-23 封装 SOT-23 Small Outline Plastic Package
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
Collector-Base Voltage	V _{CBO}	180	V
Collector-Emitter Voltage	V _{CEO}	160	V
Emitter -Base Voltage	V _{EBO}	6	V
Collector Current-Continuous	I _C	600	mA
Collector Power Dissipation	P _C	300	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55-+150	°C
Thermal resistance From junction to ambient	R _{θJA}	416	°C/W

电特性 (TA = 25°C 除非另有规定)

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)







参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =100μA, I _E =0	180		V
Collector-emitter breakdown voltage	V _{(BR)CEO} *	I _C =1mA, I _B =0	160		V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =10μA, I _C =0	6		V
Collector cut-off current	I _{CBO}	V _{CB} =120V, I _E =0		50	nA
Emitter cut-off current	I _{EBO}	V _{EB} =4V, I _C =0		50	nA
DC current gain	hFE(1)*	V _{CE} =5V, I _C =1mA	80		
	hFE(2)*	V _{CE} =5V, I _C =10mA	100	300	
	hFE(3)*	V _{CE} =5V, I _C =50mA	30		
Collector-emitter saturation voltage	V _{CE(sat)1} *	I _C =10mA, I _B =1mA		0.15	V
	V _{CE(sat)2} *	I _C =50mA, I _B =5mA		0.20	V
Base -emitter saturation voltage	V _{BE(sat)1} *	I _C =10mA, I _B =1mA		1.00	V
	V _{BE(sat)2} *	I _C =50mA, I _B =5mA		1.00	V
Transition frequency	f _T	V _{CE} =10V, I _C =10mA, f=100MHz	100	300	MHz
Collector output capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz		6	pF



*Pulse test: pulse width ≤ 300μs, duty cycle ≤ 2.0%

CLASSIFICATION OF hFE(2)


HFE	100-300	
RANK	L	H
RANGE	100-200	200-300

Typical characteristics

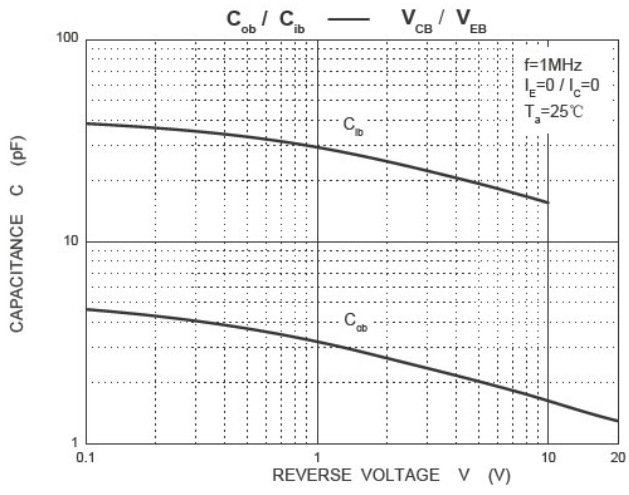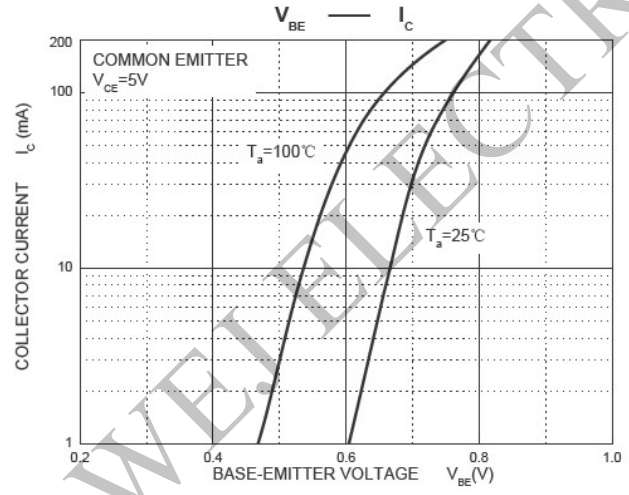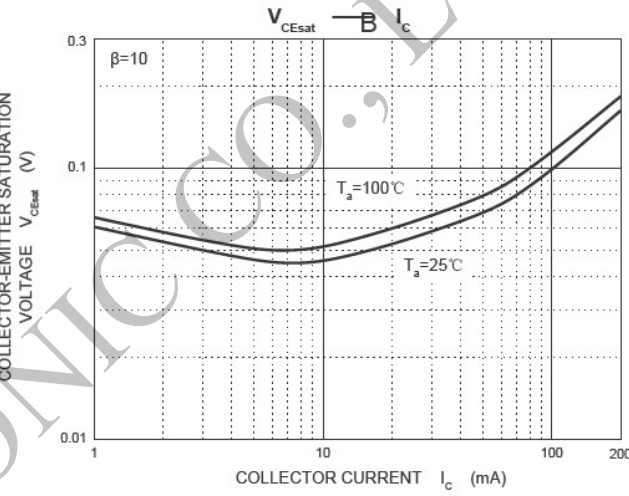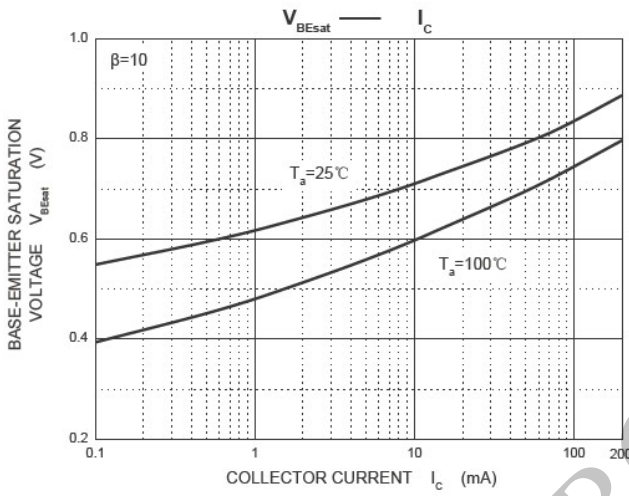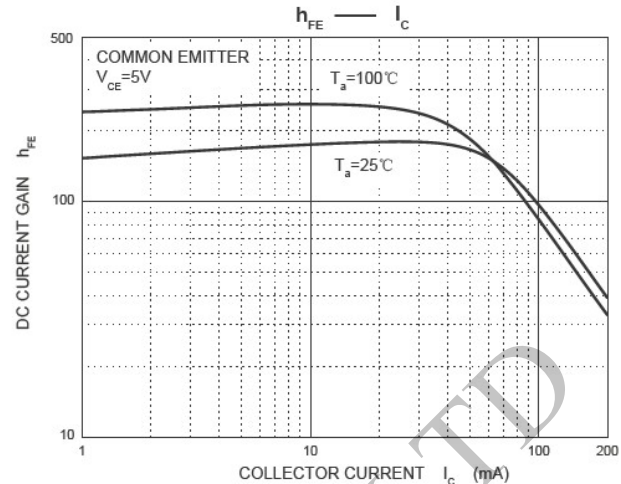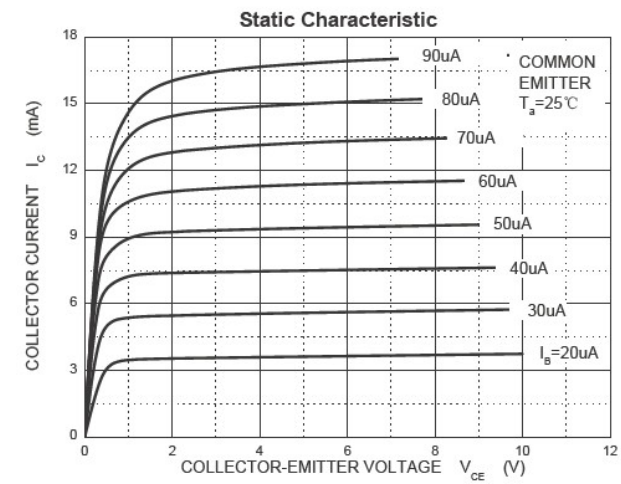

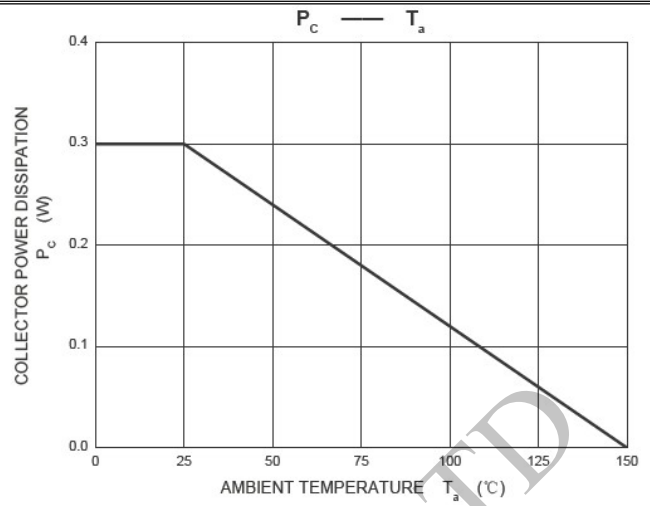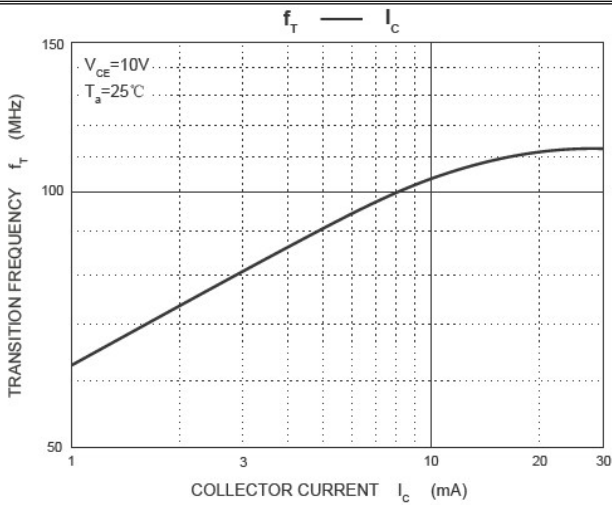


SOT-23 PACKAGE OUTLINE Plastic surface mounted package

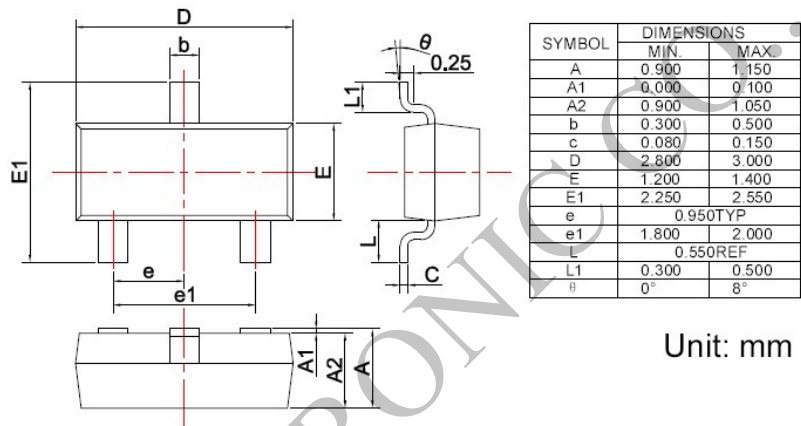

焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs



- Note:
1. Controlling dimension: In millimeters.
 2. General tolerance: $\pm 0.05mm$.
 3. The pad layout is for reference purposes only.