

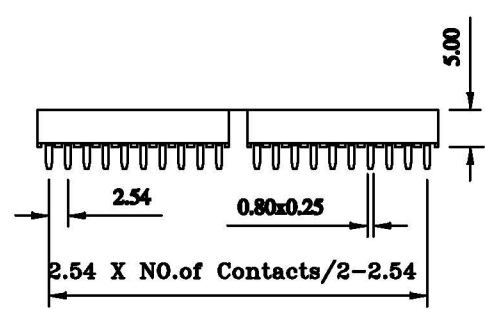

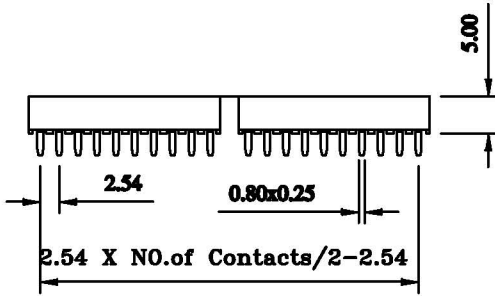
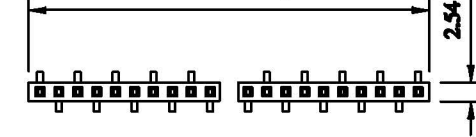


A Type

B Type





2.54 X NO.of Contacts/2+0.30±0.30

2.54 X NO.of Contacts/2+0.30±0.30

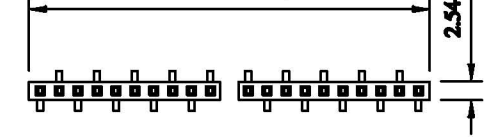

- SPECIFICATION**
- Current Rating: 3Amp
 - Dielectric Withstanding: 500V AC
 - Contact resistance: 20mΩ max
 - Insulation resistance: 1000MΩ min
 - Operating Temperature: -40° C ~ +85° C
 - Max Processing Temp: 230° C for 60 seconds
260° C for 10 seconds
 - Contact Material: Phosphor Bronze
 - Insulation Material: Polyester, UL 94V-0
Standard: PA6T
 - Finish: Tin, Gold Plated
 - Standard: Gold Flash all over

JVT2546H506T-XX-X
 胶壳高度5.0mm
 6T-PA6T
 A-A Type
 B-B Type
 PIN数

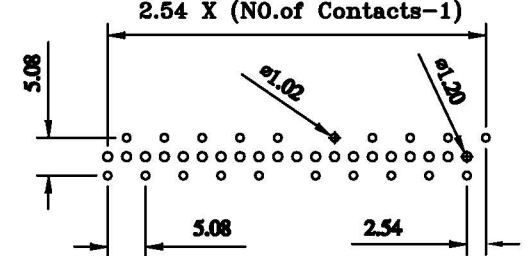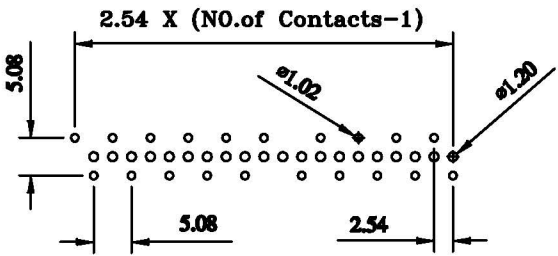

Recommended P.C. Board Hole Layout

Recommended P.C. Board Hole Layout

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	更改内容	日期	单位	mm	比例	1:1	日期	20130514	批准	审核	绘图	品名	2.54单排 错位脚排母 H5.0mm		
												料号	JVT2546H506T-XX-X		
												图名	004	版本	A

