


## 防水接线盒 IP68 waterproof junction box M686-3(A)



产品参数/Technical data	
型号 Model	M686-3 (A)
材料/Material	UL94V-2 Fire and flame retardant
额定输出 Rated power	IEC/NSW:24A 450VAC ETL:10-15A 300VAC
防护等级 IP code	IP68
接线端子 Terminal	PA10 terminal or other terminals available
工作温度 Working	T105
接线范围 Rated connecting capacity	欧规 European/澳规 Australia:0.5 ~ 2.5mm <sup>2</sup> 美规 American:SJOW 14-18AWG
密封胶塞/seal plug	 
胶塞孔径/plug aperture	8mm                      11mm
适用线径/Available cable diameter (橡胶圆线/Rubber round cable)	3*M20(4-8mm)                      3*M20(6-11mm)
防水测试 Testing	8M 150hours
产品尺寸 Product Size(参考实际尺寸)	125.23*84.1.05*38.68mm(Refer to actual drawing)
认证 Certification	ENEC,CE,UKCA,ETL,NSW,ROHS
产品质保/Quality Assurance	1 年/ one year
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground

注/Mark:1.不能使用在盐碱土壤/Do not use in saline soil

2. 不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a long time,
3. 不建议长期在日照暴晒下使用/Long time exposed under sunshine is not recommended

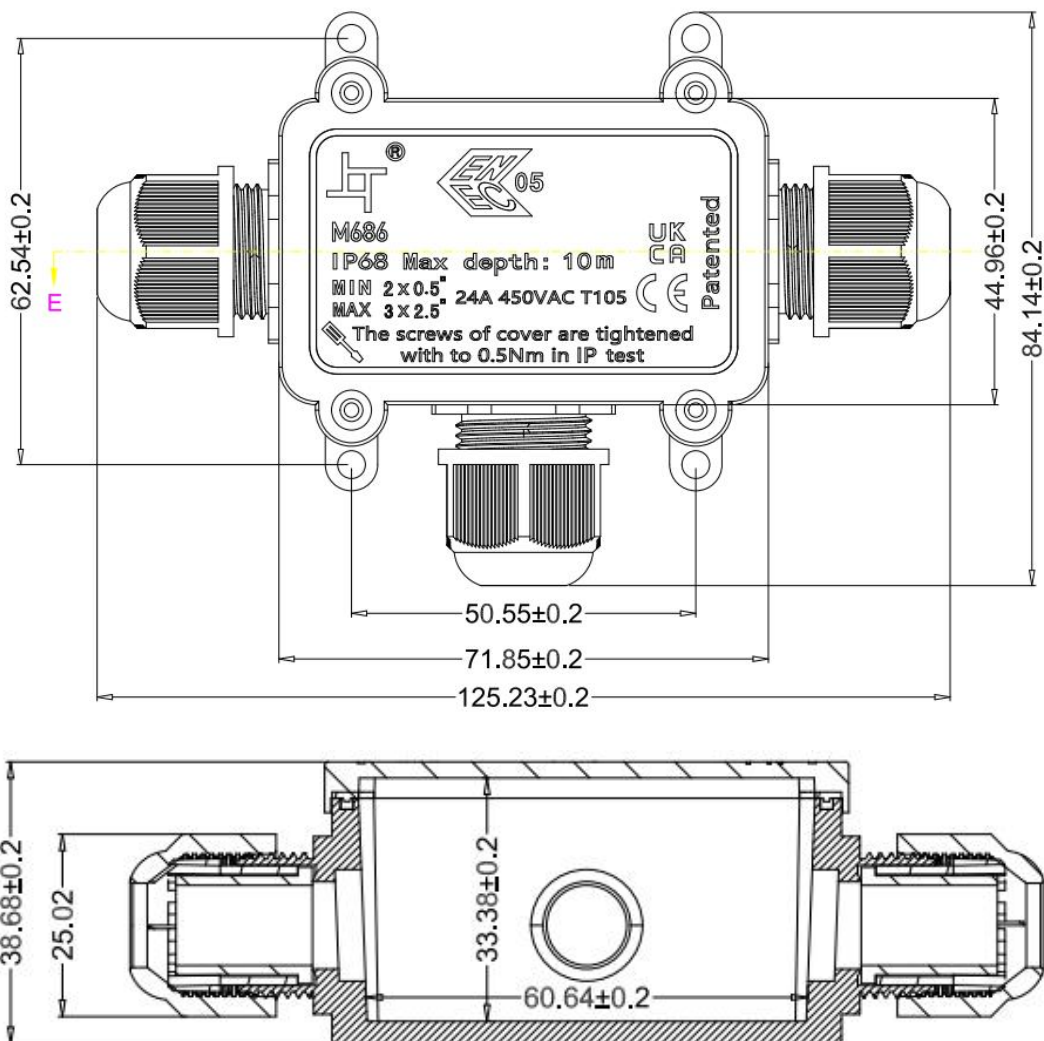

产品分解 Product breakdown

