9001 Series
DIN41612 B Type Male

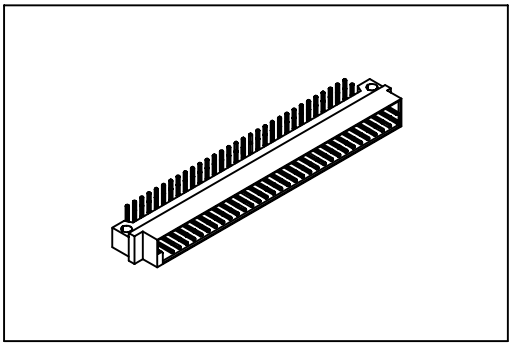

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax. at DC 100mA.
Operating Temperature: -55°C~+105°C.

Features:
* UL, cUL listing.
* Mates with Female 2Row
  9001-3264,3232 B Type.
  9001-3464,3432 Q Type.
  9001-3264 IDC Type.

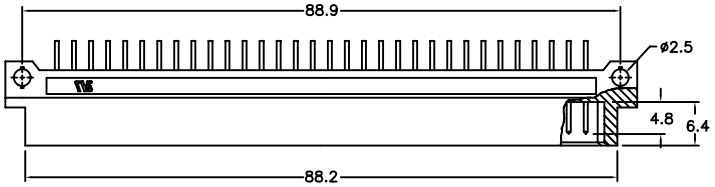

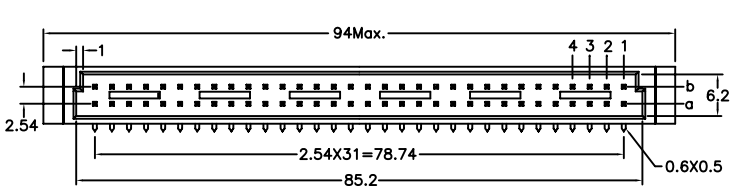



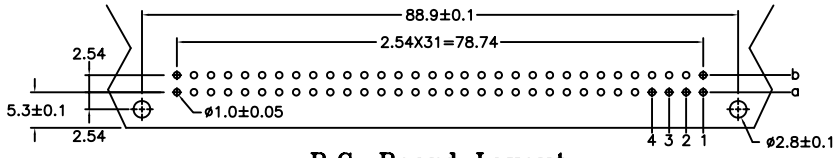

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	
5.08mm	32	a b	
	16	a -	

Ordering information

9001-	3	1	64	1	C	00	L1	A
Series	3: 2.54mm 4: 5.08mm	1: Male	Position	1: Dip Length	C: Dip Tin Contact Gold G: Gold	00: G/F 10: 10μ" 15: 15μ" 30: 30μ"	Blank: W/O Lock L1: With Lock See Page CA04	A: Tray Package

*Standard Gold Flash.