
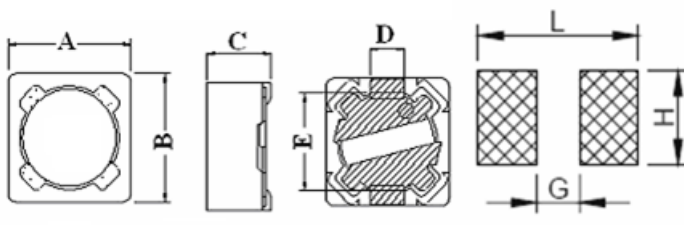


# D SP074/0220.0/0.62A

<p>DIMENSION(UNIT: mm)</p> 		A	$7.3 \pm 0.3$	m/m
		B	$7.3 \pm 0.3$	m/m
		C	4.5 (MAX)	m/m
		D	2.0 (REF)	m/m
		E	5.0 (REF)	m/m
		G	4.8 (REF)	m/m
		H	2.2 (RFE)	m/m
		L	7.8 (REF)	m/m
		ELECTRICAL REQUIREMENTS		SCHEMATIC
L (uH)	$220 \pm 20\%$			
RDC ( $\Omega$ )	1.17 (MAX)			
IDC (A)	0.62 (MAX)			
TEST CONDITION	1KHZ / 0.25V			
		MATERIAL		
WIRE TYPE	2UEW $\phi$ 0.16m/m			
WINDING	78.5 TS (REF)			



MICROS

# D SP074/0220.0/0.62A

TEST CONDITION: 1KHZ / 0.25V				DIMENSION (UNIT : mm)			
ITEM	L ( $\mu$ H)	RDC ( $\Omega$ )	IDC (A)	A	B	C	
SPEC	220 $\pm 20\%$	1.17 (MAX)	0.62 (MAX)	7.3 $\pm 0.3$	7.3 $\pm 0.3$	4.5 (MAX)	
1	228	1.05	OK	7.35	7.28	4.06	
2	229	1.05	OK	7.35	7.28	4.03	
3	230	1.06	OK	7.35	7.26	4.02	
4	220	1.04	OK	7.36	7.27	4.03	
5	222	1.05	OK	7.28	7.26	4.03	
6	227	1.05	OK	7.28	7.32	4.09	
7	225	1.05	OK	7.32	7.27	4.00	
8	223	1.06	OK	7.35	7.26	4.00	
9	230	1.05	OK	7.42	7.27	4.03	
10	230	1.05	OK	7.31	7.30	4.00	
$\bar{X}$	226	1.05		7.34	7.28	4.03	
R	10	0.02		0.14	0.06	0.09	



MICROS

# D SP074/0220.0/0.62A

