


REVISIONS

NO.	DATE	DESCRIPTION	APPROVE
-----	------	-------------	---------

Mechanical

1. Mechanical Life: 100K
2. Operating Temp: -40°C ~ 150°C

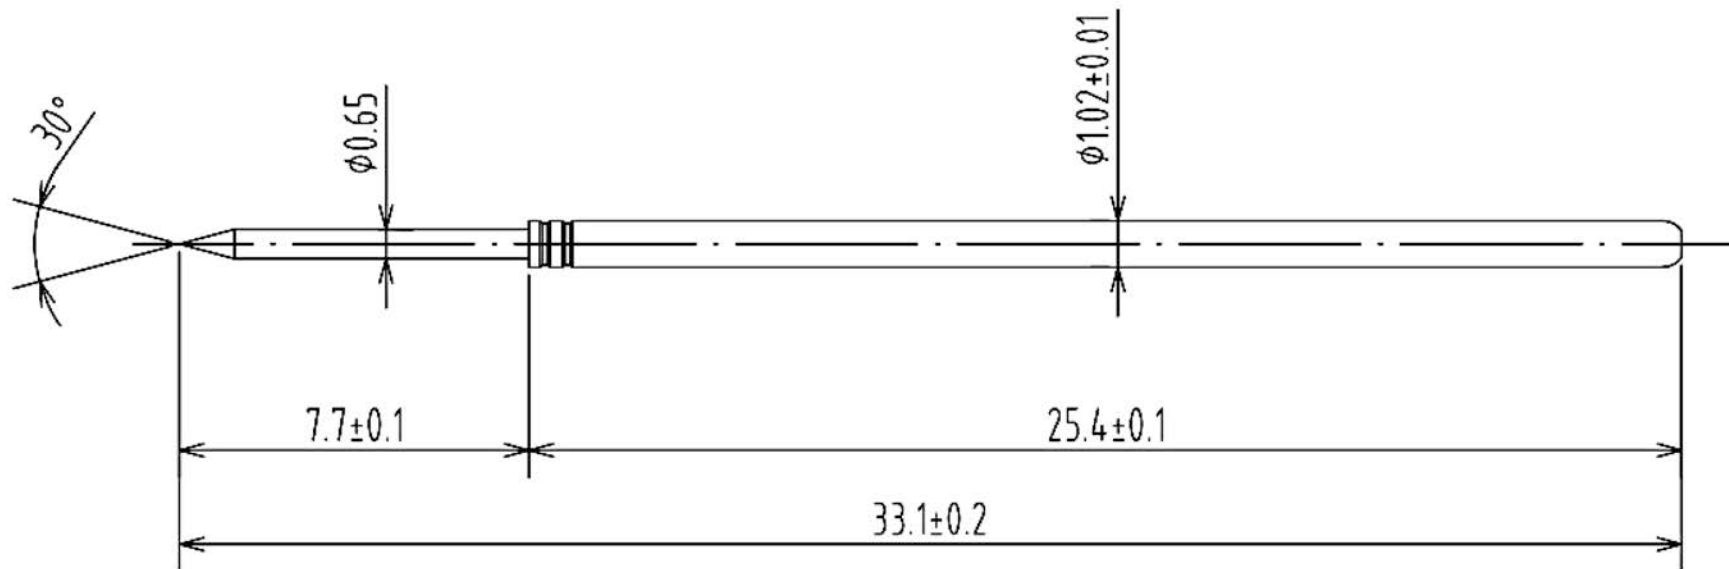

Electrical Characteristics

1. Current Capacity: 3A Continuous
2. DC Resistance: <50mΩ (AVG)

NO.	PRODUCT	MATERIAL	PLATING	HARDNESS	REMARK	TOLERANCE	Unit	Scale	Spring Force[±20%]	Part Name
5						DECIMALS	mm	60:1	Maximum	IT075-B
4						X.X ±0.1			6.35(mm)	
3	SPRING	SUS				X.XX ±0.05		2016/05/13	Maximum	(gf)
2	BARREL	PhBr	Au			X.XXX ±0.02		Max	Work.Stroke	4.0(mm)
1	PLUNGER	SK4	Au			ANGLES		Max	Work.Stroke	150(gf)
						0 ±3°		Max	Initial	(gf)
						0.0 ±1°		Cherry		

