

CUSTOMER:

MODEL NUMBER:

OUR PART NO.:

CUSTOMER PART NO.:

CUSTOMER	APPROVED	CHECKED

<b>Specification for Piezoelectric Ceramic Buzzer PIN Type</b>	Des.	Page 2 of 5

## 1. Technical Parameter


### Measuring condition

Part shall be measured under a condition (Temperature: 5~35°C, Humidity: 45%~85%R.H., Atmospheric pressure: 860 ~1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~1060hPa) is regulated to measure.

1	Resonant Frequency	4000±400Hz
2	Operating Voltage	1~25Vp-p
3	Rated Current	Max.3mA , At 4KHz 50% duty Square Wave 5Vp-p
4	Sound Output at 10cm	Min. 80dB, At 4KHz 50% duty Square Wave 5Vp-p
5	Capacitance	12000±30% pF At 120Hz
6	Operating Temperature	-20°C~+70°C
7	Store Temperature	-30°C~+80°C
8	Net Weight	Approx 1.0g
9	RoHS	Yes

## 2. Dimensions

Unit: mm

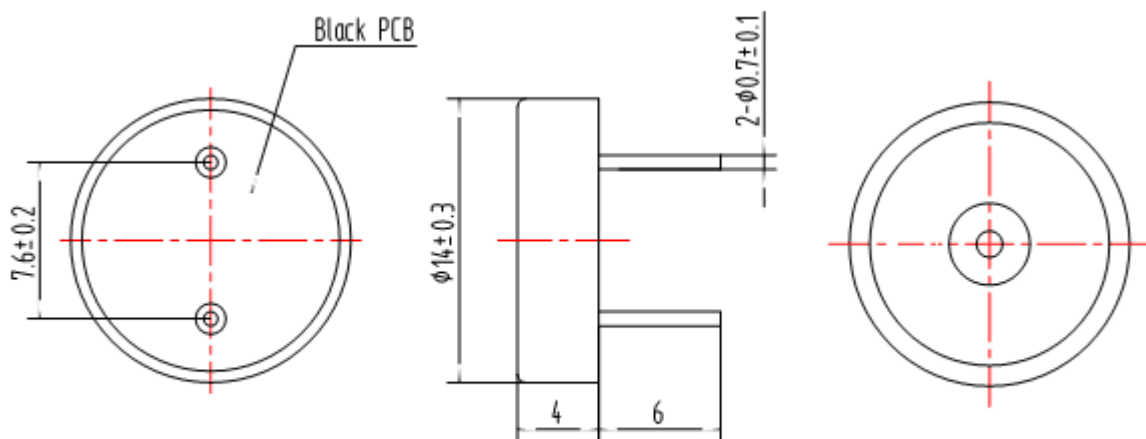


\*Unit: mm; Tolerance: ± 0.5mm Except Specified

\*Housing Material: Black PPO


<b>Specification for Piezoelectric Ceramic Buzzer PIN Type</b>	Des.	Page 3 of 5

### 3. Electrical And Acoustical Measuring Condition

#### Recommended Setting

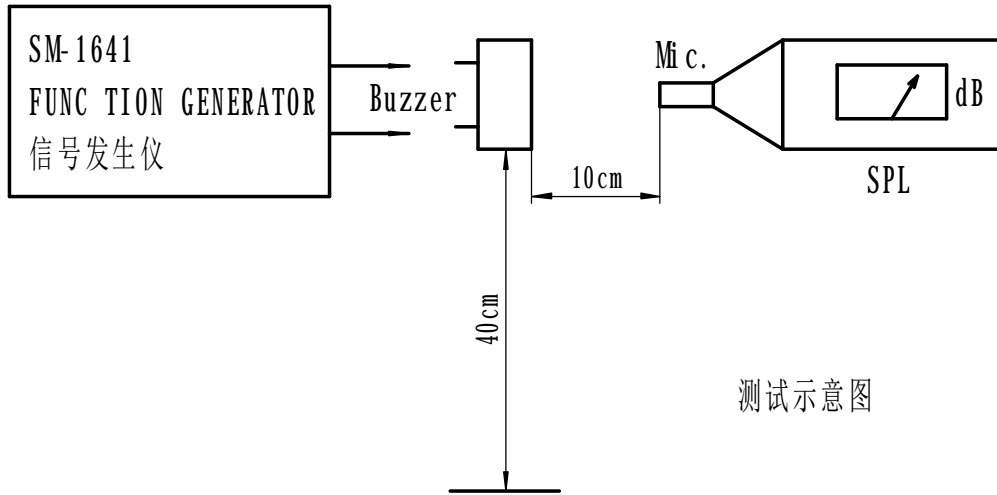

### 4. Frequency Response

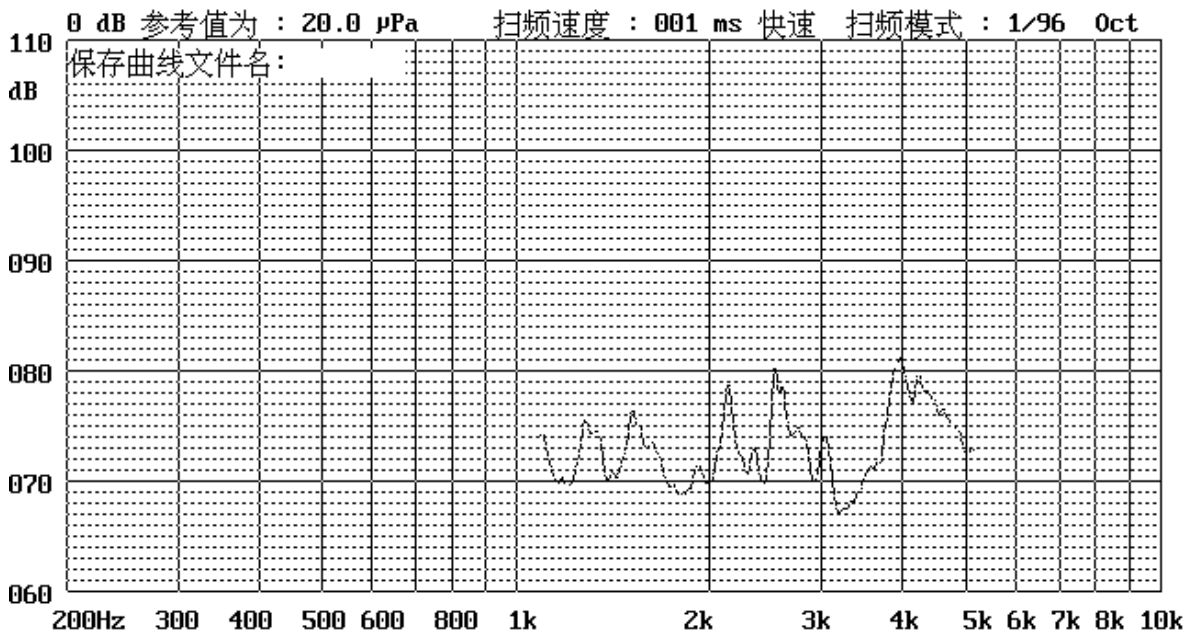

5Vp-p 50% duty Square wave, 10cm

<b>Specification for Piezoelectric Ceramic Buzzer PIN Type</b>	Des.	Page 4 of 5

**5. Reliability Test**

After any following tests the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall not deviate more than -5 dB from the initial value

**5.1 Ordinary Temperature Life Test**

The part shall be subjected to 96 hours at  $25 \pm 10^\circ\text{C}$ . Input rated voltage  
Resonant frequency, 1/2 duty Square wave.

**5.2 High Temperature Test**

The part shall be capable of with standing a storage temperature of  $+80^\circ\text{C}$  for 96 hours.

**5.3 Low Temperature Test**

The part shall be capable of with standing a storage temperature of  $-30^\circ\text{C}$  for 96 hours.

**5.4 Humidity Test**

Temperature:  $+40^\circ\text{C} \pm 3^\circ\text{C}$     Relative Humidity: 90%~95%    Duration: 48 hours  
and expose to room temperature for 6 hours

**5.5 Temperature Shock Test**

Temperature:  $70^\circ\text{C}$  /1hour →  $25^\circ\text{C}$ /3hours →  $-20^\circ\text{C}$ /1hour →  $25^\circ\text{C}$ /3hours (1cycle)  
Total cycle: 10 cycles

**5.6 Drop Test**

Standard Packaging From 1.2m(Drop on hard wood or board of 5cm thick,  
three sides, six plain.)

**5.7 Vibration Test**

Vibration: 1000cycles /min. Amplitude: 1.5mm, Duration: 1 hour in each 3 axes

**Note:**

As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enter it.

