



SD Card Connector

Reverse Push-Pull Type


ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001

Part No:


SDJMF-0T901B000

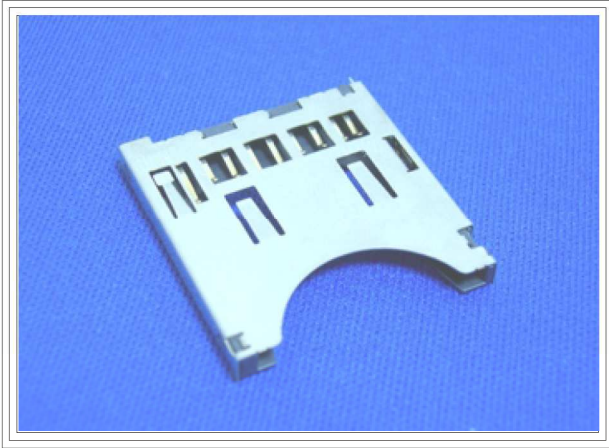

WITHOUT CARD




CARD INSERTED
WRITE PROTECT : LOCK





CARD INSERTED
WRITE PROTECT : UNLOCK

| SD CARD PIN ASSIGN | |
|--------------------|----------|
| PIN | NAME |
| 1 | CD/DAT3 |
| 2 | CMD/DI |
| 3 | VSS1 |
| 4 | VDD |
| 5 | CLK/SCLK |
| 6 | VSS2 |
| 7 | DAT0 |
| 8 | DAT1 |
| 9 | DAT2 |

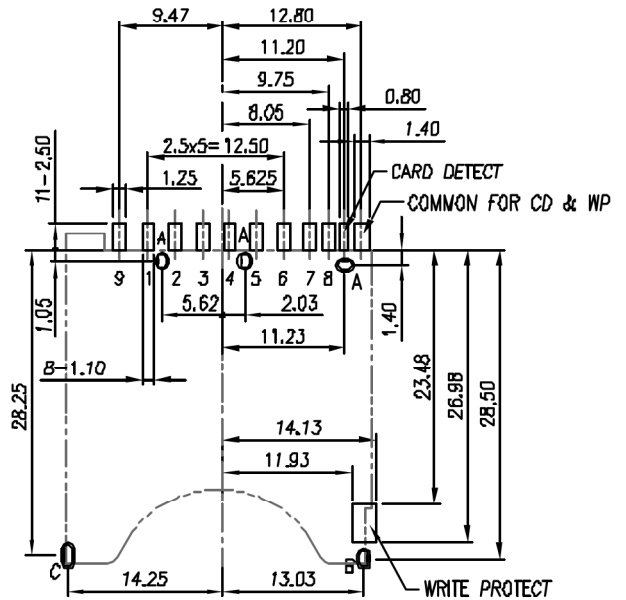

P.C.B Layout (Top View)

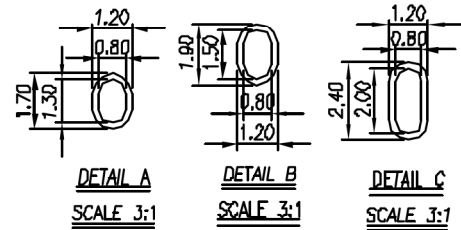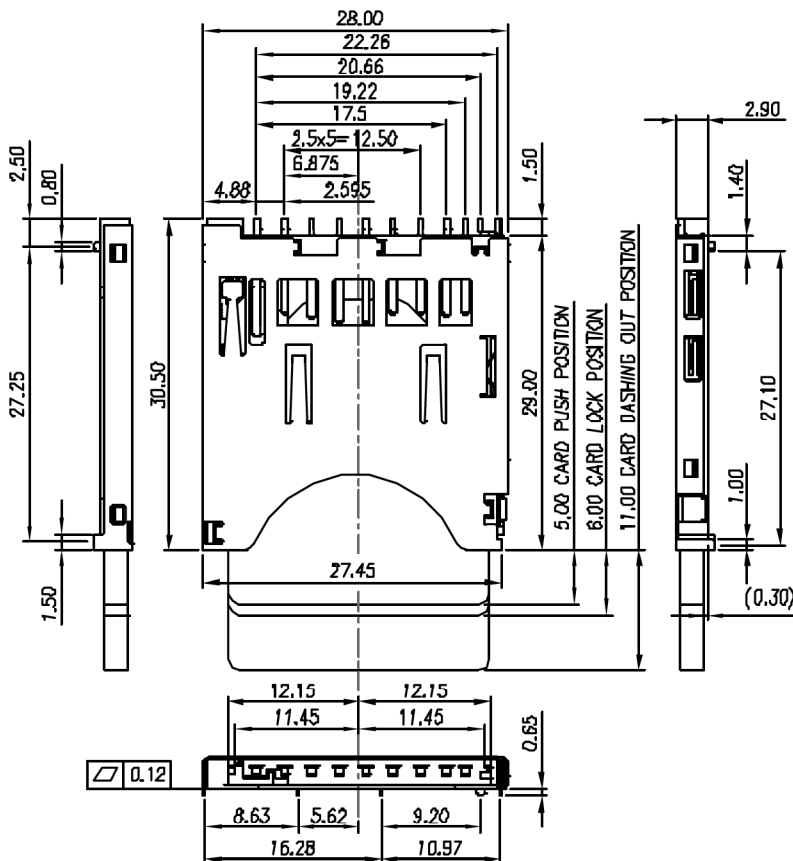

Specification:

- Withstanding Voltage: 500V AC Max with 1 Minute
- Insulation Resistance: 1000MΩ min Ratings
- Voltage : 125 Volts AC
- Current : 0.5 Amperes DC (per pin)
- Operating Temperature : -25°C~+90°C
- Contact Resistance: 100mΩ max
- Insertion Cycles: 10000 cycles

Application:

SD MEMORY CARD USE

Material And Finish:

- Contact: High performance copper alloy
- Housing: LCP UL94V-0
- Color: Black