
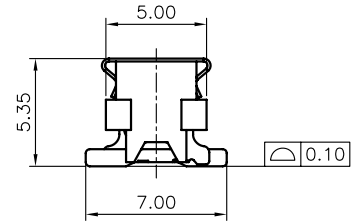
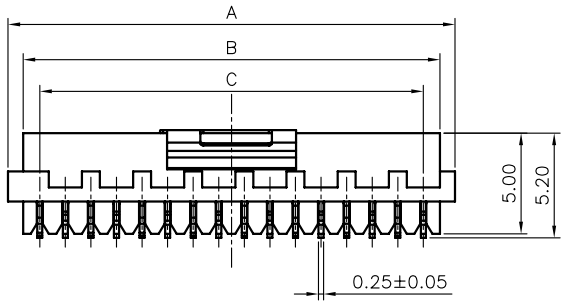


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGQ 06/14/11'		

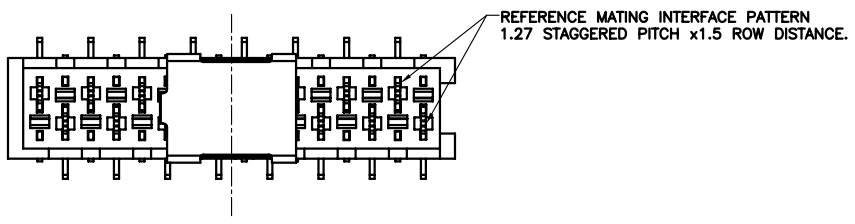

NOTES:

- MATERIAL
 - INSULATOR:HIGH TEMP. NYLON-46(UL 94V-0).
 - CONTACT: 0.25t COPPER ALLOY.
 - PICKUP: 0.15t STAINLESS STEEL.
- SPECIFICATION
 - TEMPERATURE RANGE:-40~105°C.
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.


3. PRODUCT NUMBER CODE:

DS1015-06 - X X X X X



- PACKING TYPE
T: TRAY
R: TAPE ON REEL
B: TUBE
- PICKUP SUPPORT
X: W/O MYLAR
S: W MYLAR

- CONTACT PLATING
6: FULL MATT TIN
- HOUSING COLOR
R: RED

No. OF CONTACTS
04 06 08 10 12 14
16 18 20 22 24

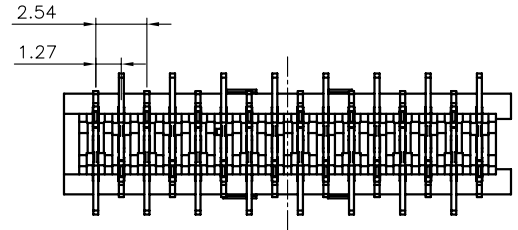

POSITIONS	DIM A	DIM B	DIM C
4	6.96	5.46	3.81
6	9.50	8.00	6.35
8	12.04	10.54	8.89
10	14.58	13.08	11.43
12	17.12	15.62	13.97
14	19.66	18.16	16.51
16	22.20	20.70	19.05
18	24.74	23.24	21.59
20	27.28	25.78	24.13
22	29.82	28.32	26.67
24	32.36	30.86	29.21

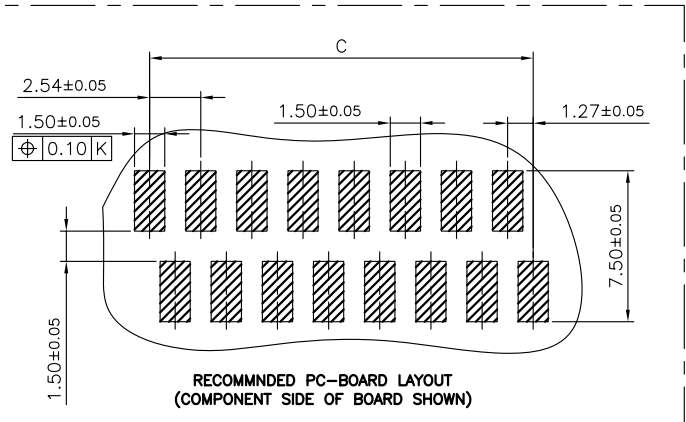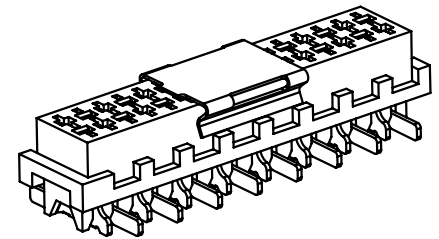

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO MATCH FEMALE VERTICAL SMT TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1015-06 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.				C-DS1015-06-XXXXX-A				