


1.27*1.5MM SMT母头
(有耳/有台/单缺/SMT)

■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

■ WAFER

- Material: PA9T UL94V-0
- Contact, Brass gold-plated or Tin-plated

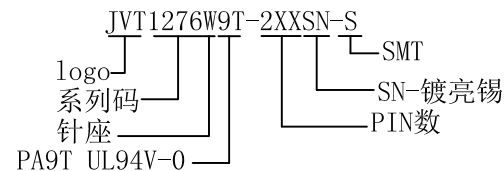

NUMBER OF POSITIONS	DIMENSION			Q'ty /Tube
	A	B	C	
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20131107
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	1.27*1.5mm 6.9母头 SMT		
	李勇军	曹成基	料号	JVT1276W9T-2XXSN-S		
			图名	118	版本	A