



DG 88 APPROVAL:

- 弹簧式垫圈螺钉连接技术；
- 优良的抗振动性能；
- 双焊脚设计，满足最大电流:65A；
- 180度接线。
- Screw connection technology with spring washer;
- Excellent anti-vibration performance;
- Double soldering pin design, ensure Max. current :65A;
- 180° connection.

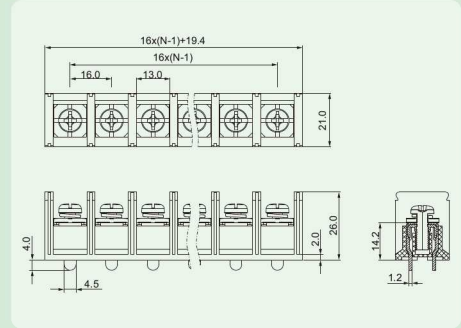

DG 88RT APPROVAL:

- 弹簧式垫圈螺钉连接技术；
- 优良的抗振动性能；
- 双焊脚设计，满足最大电流:65A；
- 90度接线。
- Screw connection technology with spring washer;
- Excellent anti-vibration performance;
- Double soldering pin design, ensure Max. current :65A;
- 90° connection.

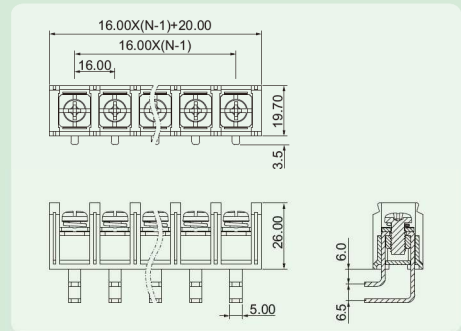

技术参数 Technical Data

型号 Model	线径 Wire range	线数 Poles	IEC技术参数 (IEC datasheet)		UL技术参数 (UL datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG 88	10mm ² /14-6AWG	02-20P	1000V	76V	600V	65V
DG 88RT	16mm ² /10-4AWG	01-12P	1000V	76V	600V	75V

应用行业 Application

工业自动化、电力电气、新能源等行业。
Industrial automation, electric power, new energy industry etc.



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG88-02P	200	DG88RT-02P	200
DG88-03P	140	DG88RT-03P	140
DG88-04P	110	DG88RT-04P	110
DG88-05P	80	DG88RT-05P	80
DG88-06P	60	DG88RT-06P	60
DG88-07P	60	DG88RT-07P	60
DG88-08P	55	DG88RT-08P	55
DG88-09P	44	DG88RT-09P	44
DG88-10P	40	DG88RT-10P	40
DG88-11P	35	DG88RT-11P	35
DG88-12P	35	DG88RT-12P	35

产品订货 How to order

