

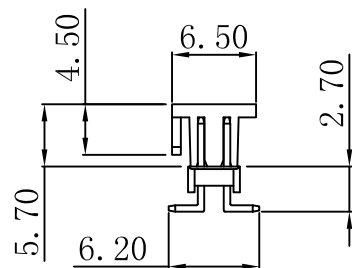
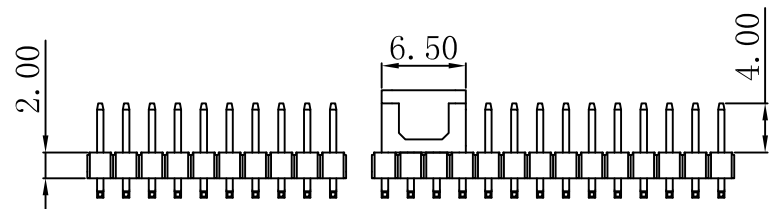


2.0 * No.of Contacts/2 ±0.30

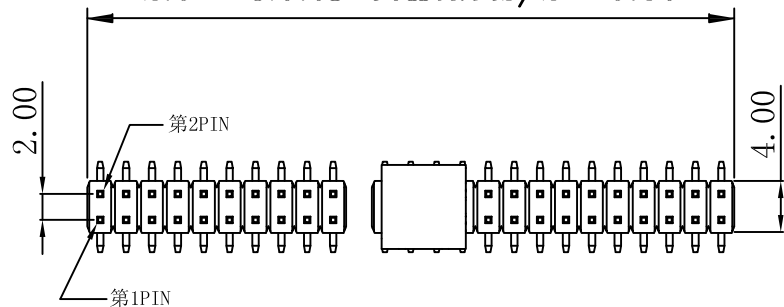

2.0 * No.of Contacts/2 -2.00

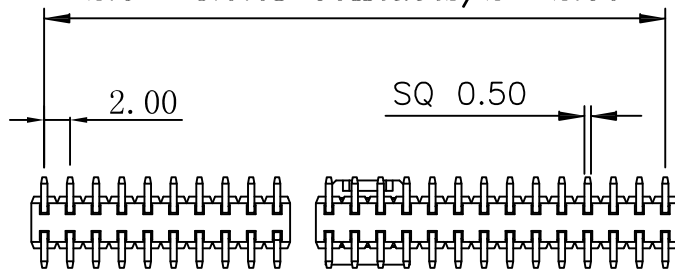


SPECIFICATION

- Current Rating: 2Amp
- Dielectric Withstanding: 500V AC
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Operating Temperature: -40° C ~ +85° C
- Contact Material: Copper Alloy
- Insulation Material: Polyester, UL 94V-0
Standard: PA6T
- Finish: Tin, Gold Plated
Standard: Gold Flash all over

JVT2052H206T-2*XXC-S
 胶壳高度2.0mm — S-SMT
 6T-PA6T — C-带盖子
 PIN数

Recommended P.C. Board
SMD Layout

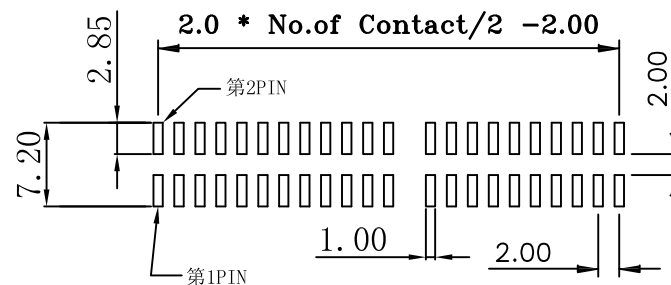

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10



版本	变更内容	日期	单位	mm	比例	1:1	日期	20150514
----	------	----	----	----	----	-----	----	----------

核准	审核	绘图	品名	2.0排针H2.0 双排 带盖 SMT		
	BOLLY	TONY	料号	JVT2052H206T-2*XXC-S		
			图名	004	版本	A