

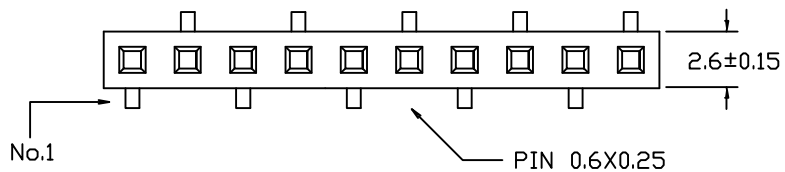


TYPE A



TYPE B

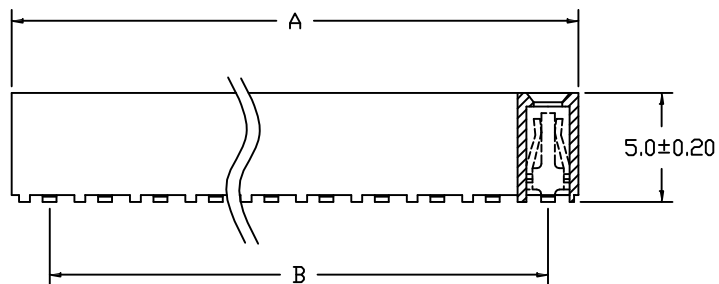



SPECIFICATIONS

Material:


Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass
 Contact Plating: Au or Sn over 50 u' Ni
 Plating: 1u" Au

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 1000V
 Current Rating: 3 AMP
 Operating Temperature: -40°C to +105°C

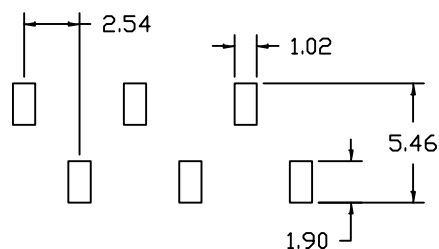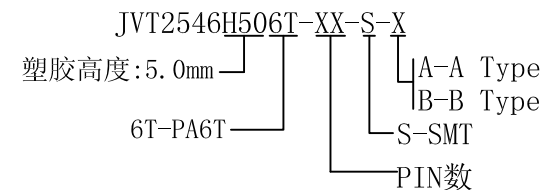

TYPE A
PCB LAYOUT

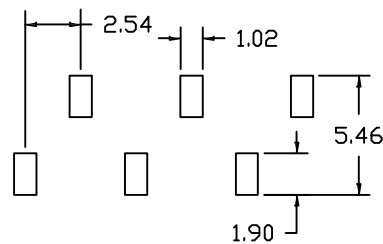

TYPE B
PCB LAYOUT

未注公差按公差分段要求

Position Dimension	1 thru 40	GENERAL TOLERANCE		
A±0.30	2.54 * No. of Positions+0.5	0	±0.35	
B±0.25	2.54 * No. of Contacts-2.54	.0	±0.30	
		.00	±0.20	
		.000	±0.10	

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140514
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	2.54mm 单排排母 H2.5mm 错位脚SMT		
	CHEN	TONY	料号	JVT2546H506T-XX-S-X		
			图名	100	版本	A