
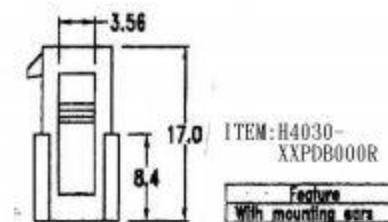



Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black
- Recommended panel thickness: 1.57mm

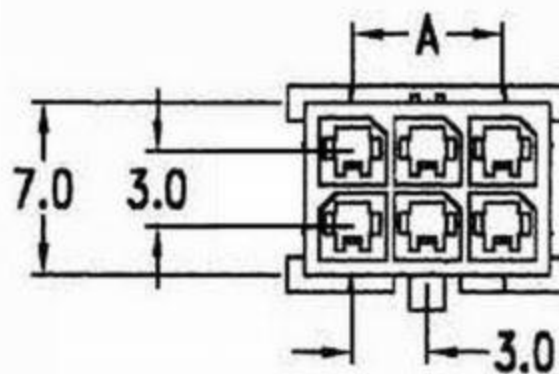

Specifications:

- Current rating:

| Wire size | # 20 | # 22 | # 24 | # 26 | # 28 | # 30 |
|-----------|------|------|------|------|------|------|
| Amps | 5 A | 5 A | 4 A | 3 A | 2 A | 1 A |

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Dimensional Information

| Circuits | Dim. A | Dim. B | Circuits | Dim. A | Dim. B |
|----------|--------|--------|----------|--------|--------|
| 2 | | 4.0 | 14 | 18.0 | 22.0 |
| 4 | 3.0 | 7.0 | 16 | 21.0 | 25.0 |
| 6 | 6.0 | 10.0 | 18 | 24.0 | 28.0 |
| 8 | 9.0 | 13.0 | 20 | 27.0 | 31.0 |
| 10 | 12.0 | 16.0 | 22 | 30.0 | 34.0 |
| 12 | 15.0 | 19.0 | 24 | 33.0 | 37.0 |

