

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. Rated voltage/current : 600V / 10A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M2 , 1.77Lb.in
- 4. Wire range : 26~16AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6KV
Rate voltage(V)	500V
Rate current(A)	17.5A





- 2. Torque value : M2 , 0.2N·m
- 3. Wire range : 0.2~1.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 4.2mm, Poles : N=01P
- 3. Stripping length : 6~7mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In		Nominal		Dimension		Range		mm
	Over	To	Over	To	Over	To	Over		
6	TO	10	TO	30	TO	60	TO	100	0.1/10
10	TO	24	TO	30	TO	60	TO	150	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2.0	

6. RoHS Compliance

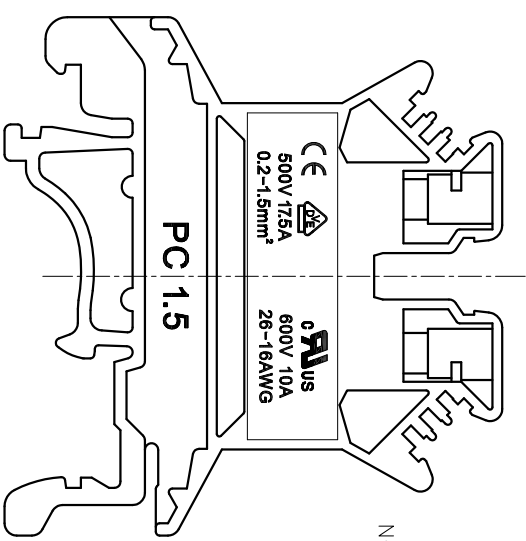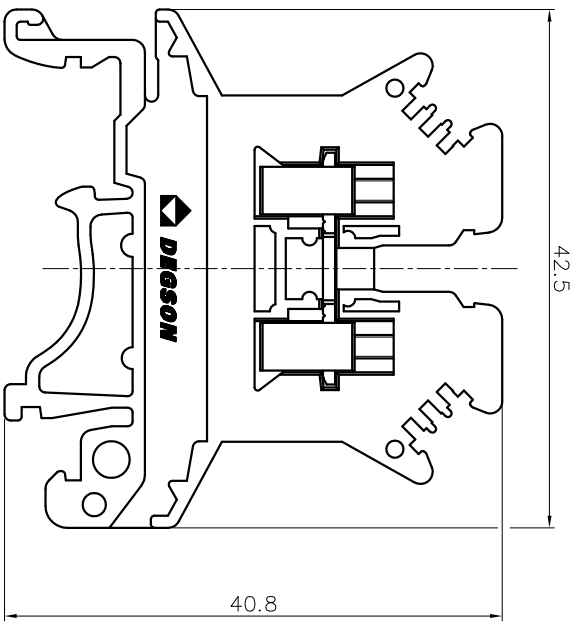

PC1.5 - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1