




DEGSON ELECTRONICS CO., LTD.


Product Specification

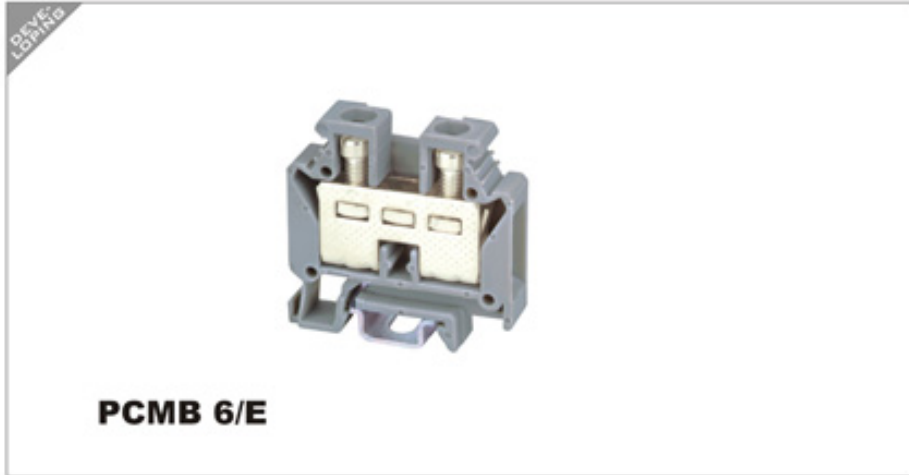

Capability		
Approval		
Standard	UL	IEC
Rated Voltage	300V	500V
Rated Current	50A	41A
Wire size	20-8AWG	0.2-6.0mm ²
T/W/End plate	8.2/33.3/1.5mm	
Height _{mm} (NS35:7.5/NS35:15/NS32)	36mm	
Rated Surge Voltage/Contamination Class	6KV/3	
Stripping Length	10mm	
Screw Thread/Tightening Torque	M4/1.2N.m/10.5Lb-in	
Internal Cylindrical Gage	A5	
Insulating Material/Inflammability Class	PA/V-0	

Specification	Model	Pieces
(1) Terminal Block	PCMB 6/E	50
(2) End Cover	D-PCMBK 6/E	50
(3) Fixed Bridge 2-P 3-P 5-P 10-P	FBI 10-8	10
(4) Step Bracket		
(5) Insertion Bridge 2-P 3-P 10-P	EB 2-8 EB 3-8 EB 10-8	100 100 10
(6) Isolator Bridge Bar, 10 P	ISSBI 10-8	10
(7) Bridge Bar Isolator	IS-K 10	100
(8) Switching Bridge	SB 2-8/13	1
(9) Separating Plate	TS-KK 3	50
(10) Separating Plate, Width:1.5mm	ATP-PCMBK	50
(11) Test Plug Socket	PSB 4/7/5	100
(12) Test Plug Socket, Insulated		
(13) Zack Strip	ZB8	

HOW TO ORDER:

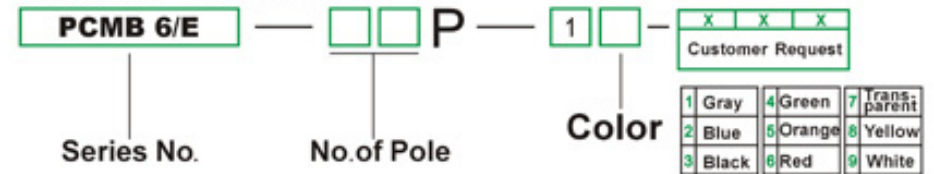

		DEGSON ELECTRONICS CO., LTD.
NAME		PCMB 6/E