












CE

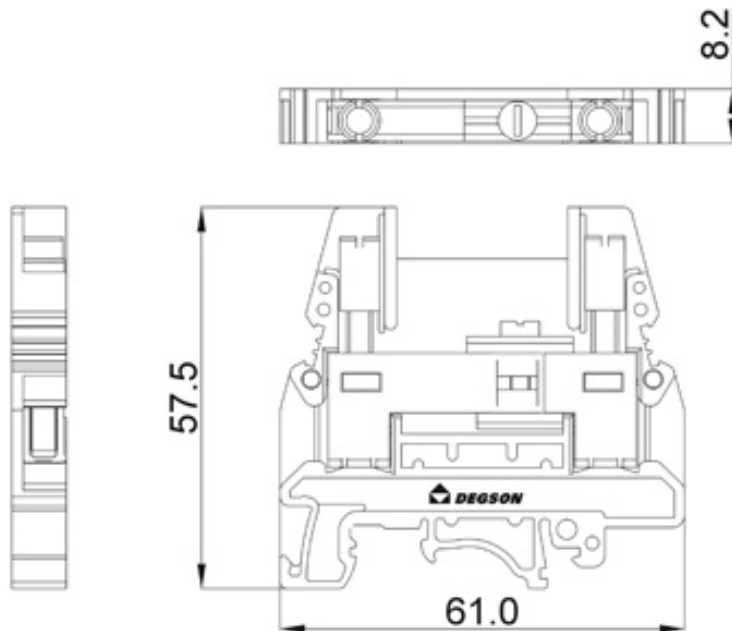

**PCTK 6-BEN**



Capability		
Approval		
Standard	UL	IEC
Rated Voltage	300V	500V
Rated Current	40A	41A
Wire size	26-10AWG	0.5-6mm <sup>2</sup>
T/W/End plate	8.2/61/2.2mm	
Height <sub>mm</sub> (NS35:7.5/NS35:15/NS32)	58.5/66/63.5mm	
Rated Surge Voltage/Contamination Class	6kV/3	
Stripping Length	10mm	
Screw Thread/Tightening Torque	M4/1.2N.m/10.5Lb-in/M3/0.5N.m/4.5Lb-in	
Internal Cylindrical Gage	A5	
Insulating Material/Inflammability Class	PAV-0	

Specification	Model	Pieces
(1) Terminal Block	PCTK6-BEN	50
(2) End Cover	D-PCRTK/S-BEN	50
(3) Fixed Bridge	2-P 3-P 5-P 10-P	
(4) Step Bracket		
(5) Insertion Bridge	2-P 3-P 10-P	
(6) Isolator Bridge Bar, 10 P		
(7) Bridge Bar Isolator		
(8) Switching Bridge		
(9) Separating Plate	TS-RTK-BEN	50
(10) Separating Plate, Width:1.5mm	ATS-RTK-BEN	100
(11) Test Plug Socket		
(12) Test Plug Socket, Insulated		
(13) Zack Strip	ZB8	

**HOW TO ORDER:**

**PCTK 6-BEN** —   P —   —

Series No.      No. of Pole      Color      Customer Request

1 Gray	4 Green	7 Trans-parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>PCTK 6-BEN</b>