



SIM Card Connector

With Stopper


ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001

Part No:

SIMMP-00801B000-G

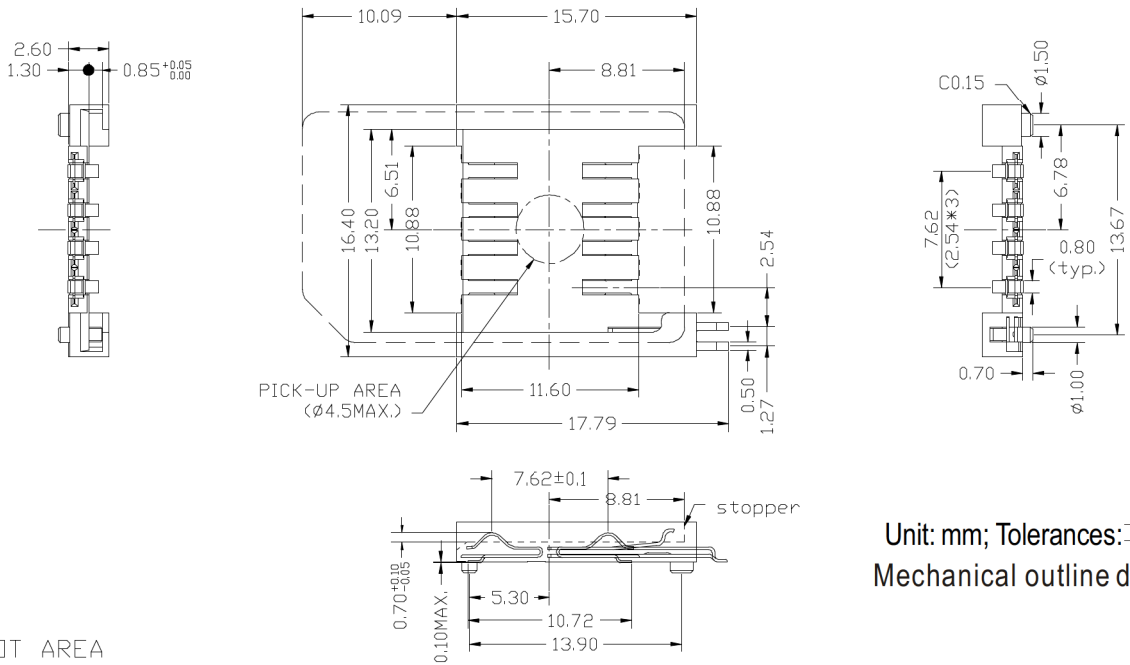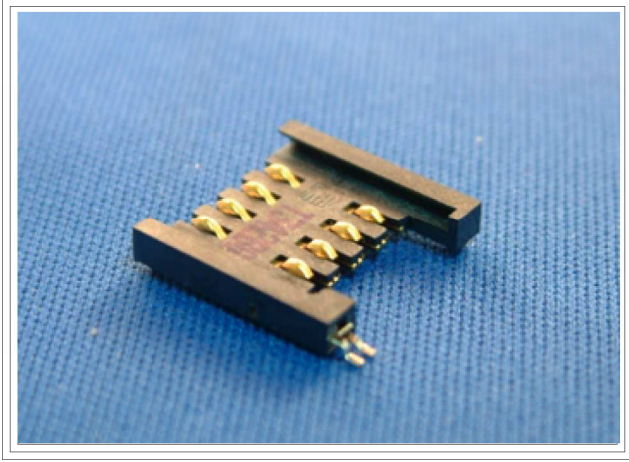

Unit: mm; Tolerances: ± 0.10 mm
Mechanical outline dimension

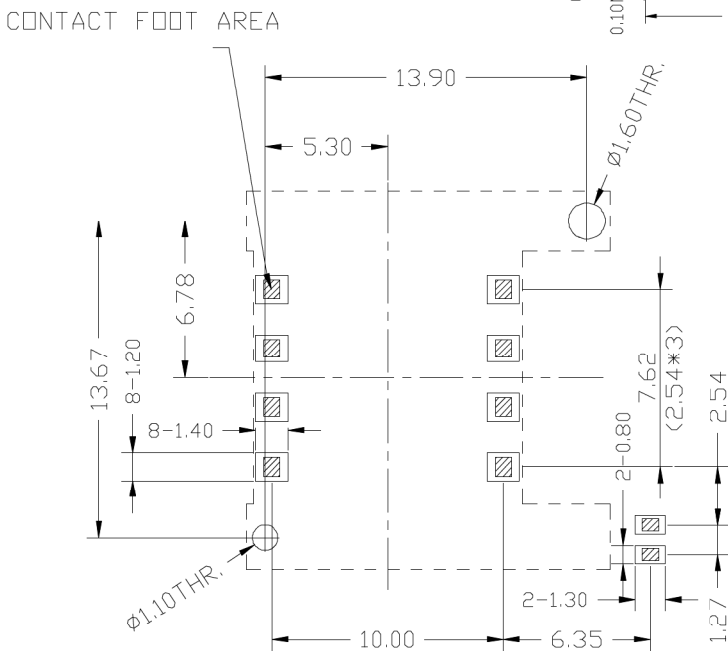

Unit: mm; Tolerances: ± 0.10 mm
Reference dimension for PCB layout

Specification:

General Characteristics:

Dimensions: 15.70L x 16.40W x 2.60H mm

Mounting System: SMT

Durability: 100,000 cycles min.

Electrical Characteristics:

Contact Resistance: 50m Ohms typical, 100m Ohms Max.

Insulation Resistance: > 1000 M Ohms/ 500VDC

Environmental Characteristics:

Operating Temperature: -40 C ~ +85 C

Operating Humidity: 10% ~ 95% RH

Storage Temperature: -40 C ~ +85 C

Storage Humidity: 10% ~ 95% RH

Thermal Shock: -40 C ~ +85 C, 5 cycles

Damp Heat: 40 C, 90% RH, 500HR.

Salt-mist: 35 C, 5%, NaCl, 48HR.

Application:

For SIM Card Use Only

Material And Finish:

Housing: Thermoplastic, UL 94V-0