

# XY2500FA-5.0 XY2500FB-5.08




## Dimensions

Poles:	2P-24P
Pitch:	5.0mm(.197"),5.08mm(.200")

## Electrical

Standard:	UL	IEC
Voltage Rating:	300V	320V
Current Rating:	15A	20A
Wire range:	28-12AWG	2.5mm <sup>2</sup>
Withstand voltage	AC2500V/Min	

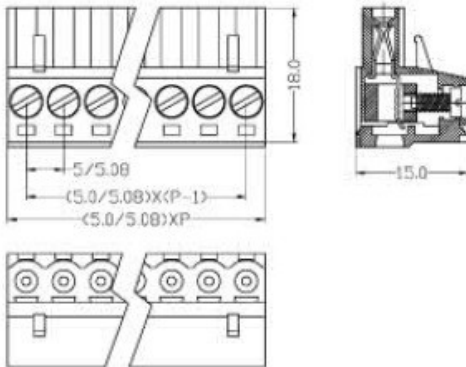

## Mechanical

Torque:	0.4N.m(3.5Lb-In.)
Ambient temperature	-40°C~+105°C
Strip length	6-7mm

## Material

Housing:	PA66(UL 94V-0)
Contact:	Phosphor Bronze ,Nickel Plated
Wire Cage:	Brass (Nickel Plated)
Screw:	M2.5,steel,A3 Zn plated