



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

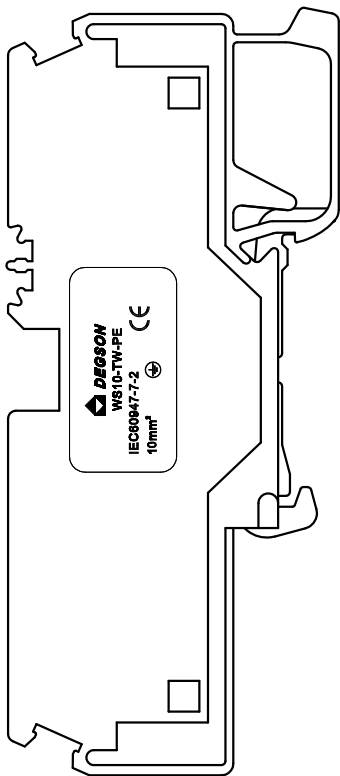

- NOTES:
 UL Standard
 1. Wire range : 24~8AWG
 IEC Standard

1.	Pollution degree	3
	Overvoltage category	III
	Rate impulse voltage(KV)	8.0KV
	Rate voltage(V)	/ V
	Rate current(A)	/ A


2. Wire range : 0.2~10mm²

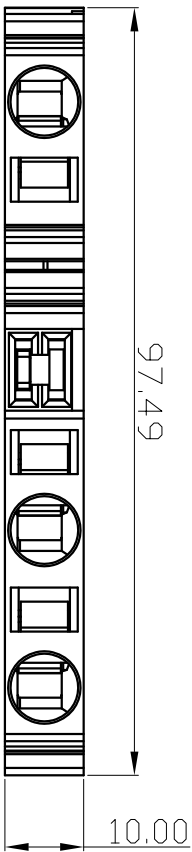

- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 10.0mm, Poles : 01P
 3. Stripping length : 13~14mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension	range in mm	-	+ / Δ
Over 10	Over 30	Over 60	Over 100	Over 150
TO 10	TO 30	TO 60	TO 100	TO 150
6 TO 10	24 TO 30	60 TO 100	150	±2°
±0.15 / ±0.20 / ±0.30 / ±0.50 / ±0.70 / ±1.00 / ±1.30				

6. RoHS Compliance

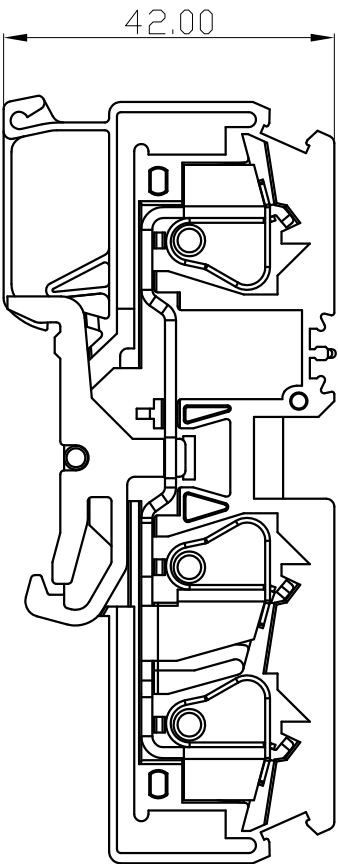

WS10-TW-PE - 01P - 1C - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color): (Yellow-Green)
 00A - (Standard) (RoHS)

DETACHED LISTS		
APPD:	/	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
DRFT:	/	WS10-TW-PE-01P-1C-00A(H)
		CUSTOMER DRAWING
THIRD ANGLE PROJECTION		SCALE 1:1