


Customer ' s name 客户名称 :					Customer recognizes 客户承认:
NO. 序号	Specified voltage and frequency 额定电压及频率	Specified capacity and capacity deviation 额定电容及电容偏差	Over all dimension 外形尺寸 (mm) (L×H×W) ±0.5	Remark 备注	
1	450VAC 50/60Hz	0.8μF±10%	37×23×13		
2	450VAC 50/60Hz	1.0μF±10%	37×23×13		
3	450VAC 50/60Hz	1.8μF±10%	38×27×14.5		
4	450VAC 50/60Hz	3μF±10%	38×28×17		
5	450VAC 50/60Hz	4μF±10%	47×18×29		
6	450VAC 50/60Hz	5μF±10%	47×18×34		
7	450VAC 50/60Hz	6μF±10%	47×22×34		
8	450VAC 50/60Hz	10μF±10%	47×18×29		
Carry out standard 推行标准	GB 3667.1-2016/IEC60252-1: 2008				
Operating temp range 使用温度范围	-25~+70°C	Lifespan garden 寿命等级	C CLASS		
Withstanding standard 耐电压	Between terminals 端子相互间	2.0UN 2S无击穿及飞弧现象			
	Terminals to case 端子与外壳间 (金属外壳)	-----			
Capacitance tolerance 电容偏差	±10%				
Loss angle tangent	≤ 0.0020 (100 Hz)				
Shape	See right picture				
	Condenser fuse	Have self-healing			

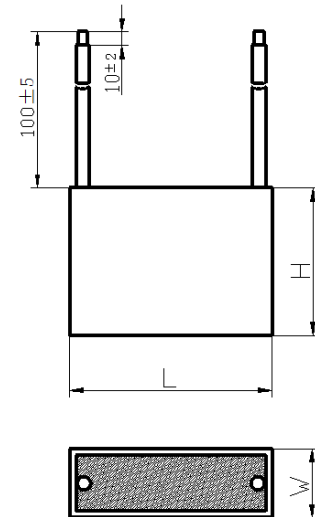

	Case	Black of plastics outer shell	drafts system:	Name:CBB61 metallized polypropylene film capacitor. CBB61
	Terminals	2.2-2.4mm ² black wire	Approval	Wenling jiyang capacitor co.,LTD
	Filling	Black of Epoxy resin		