

CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	Α

### A. Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

KAN3542B− □□□	
	Press force (refer to chart 3) Stem color (refer to chart 2) Product height (refer to chart 1)

1. Product height: It is denoted by three figures; For examples, "050" expresses the product which the total height is 5mm, as chart 1 shows:

Code	Product height	Code	Product height	Code	Product height
043	4.3				
050	5				

2. Stem color: It is expressed by a figure, as chart 2 shows:

Color	Black
Code	1

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

force	Operating Dec	Press force	Return force
В	1.6	1.6±0.5	0.4min
С	2.6	2.6±0.5	0.6min

Examples: "KAN3542B-0501B" denotes the tact switch with  $6\times3.5$  base, the height is 5mm,the stem is black , the operating force is 1.6N.

APPROVE BY 黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25
-------------------------	------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	А

#### 1、 概述

### **GENERAL**

1.2 适用范围

#### **APPLICATION**

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

### Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20°C ~70°C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

### Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- $-30^{\circ}$ C  $\sim$ 80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

#### **Test Conditions**

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度.....20℃±2℃

Temperature.......20℃±2℃ 相对湿度.......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

APPROVE BY 黄蜀东 09.10.25 CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25
------------------------------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	Α

### 2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

### **ELECTRICAL SPECIFICATION**

项	į		项 目 试 验 条 件				要求
ITI	ΞM		TE	TEST CONDITIONS			UIREMENTS
		接触电阻	在以 5V 10mA的直流电源或不低于1KHz的交流电源的电路中,以一个等于2倍按力的静负荷施加于手柄中心 Applying a static load of 2 times operating force to				
1		act Resistance	the center of the stem,	, measurements sha	ll be made by		$\leq 50$ m $\Omega$
			5V DC 10mA or mo	re than 1KHZ AC	small-current		
			contact resistance met	er.			
2	I	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值  Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ
3	介质耐压 Dielectric voltage proof		在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.				击穿、无飞弧 There should be breakdown and flashover
APPROVE	E BY	黄蜀东 09.10.2	25 CHECKED BY	关 林 09.10.25	PRPARE B	Y	曹 盖 09.10.25



		AFFINOVAL		
CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	А
项目		试验条件		要求
ITEM	Т	EST CONDITIONS		REQUIREMENTS
触点抖动 Bounce	在导通和断开过程中测记 Lightly striking the cen	iter of the stem at a rat mes per second), and	e encountered in bounce shall be	DN-3msec.max DFF-8msec.max

MECHANICAL SPECIFICATION						
1	按力 Operating Force	量开关导通所需 Placing the sw vertical and th center of the si	F方向放置,在开关等的最大力度。 itch such that the dien gradually increatem, the maximum leads the shall be measured.	eration is ed to the	refer to chart 3	
2	最大行程 Full Trave	开关驱动件顶端 Placing the sw vertical and the	E方向放置,以一个等带中心,测量顶端移动itch such that the dien applying static loase stem; the travel dien measured.	eration is g force to	0.25±0.1mm	
APP	ROVE BY	黄蜀东 09.10.25 CHECKED BY 关 林 09.10.25 PRPAI				曹 盖 09.10.25



С	USTOMER	CUSTOMER'S		/N	PRODU			EVISION
			KAN	3542B	TAC	T SWITCH	4	Α
	项目 ITEM		试 验 ź TEST CONI	. , ,	l		RE	要求 QUIREMENTS
3	回弹力 Return Force	开关垂直于操作力后,测量顶端向自 The sample switt operation is verti- to the whole trave free position shall	l 由位置转换的力 ch is installed su cal and upon de el distance, the fo	度。 ch that the d pressing the	lirection o	of switch as center	re	fer to chart 3
4	停止强度 Stop Strengt	开关垂直于操作力 荷持续 1min。 Placing the switc vertical, and the direction of stem	n such that the o	direction of sof	witch ope be applie	eration is	There s	l械和电气损坏 shall be no sign of e mechanically and electrically.
5	手柄拔出 强度 Stem Strength	开关垂直于操作力的行程范围。 Placing the switce vertical, and then opposite to the displacement.	h such that the o	direction of so	witch ope and a pull	eration is I applied		20N.min.
6	可焊性 Solderability	(2) 浸入时间:2s: Immersion ti 对于其它步骤	nall be made folk 5±5℃ erature : 245±5℃ e0.5s	.6—86》试验	≩ 12a		90%以J Except	for the edge, the should cover a
APP	ROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.	10.25	PRPAR	RE BY	曹 盖 09.10.25



С	USTOMER	(	CUSTOMER	'S P/N	P/I	N	PROD	UCT	R	EVISION
					KAN3	3542B	TAC	T SWITCH		А
	项目	· ·			试 验	条件	<u>'</u>			要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
	限电气性能。 RONMENTAL	. SPEC	CIFICATION							
1	低温测试 Resistance low tempera	to ature	标准湿度的 Following t normal ten measureme (1) 温度 Tem (2) 时间	环境中 the test nperatur ents are 度: -30±		能测试 <b>:</b> ow the sa	mple shall	be left in	Contac ≤200m 项目 3,	
2	高温测试 Heat resista	nce	标准湿度的 Following t normal ten measureme (1) 温质 ten (2) 时间	环境中 the test nperatur ents are 度: 80±2		能测试: ow the sa	mple shall	be left in	Contac ≤200m 项目 3,	
3	温度周期性 Change temperate	of	样品应放在 试期间样品 After 5 cyc allowed to conditions	常温及标应保持 cles of stand for 1 h.	求进行 5 次循 示准湿度的环 干燥. following cor under norm and measure s shall be ren Temperat -10±2° -10~65 65±2° 65~-10	境中 1 小nditions, that temper ements showed.	时后做性能 ne sample ature and	e shall be humidity de. During	Contac ≤200m 项目 3,	
APP	ROVE BY	黄蜀	L 东 09.10.25	CHE	CKED BY	关 林 0	9.10.25	PRPARI	E BY	曹 盖 09.10.25



С	USTOMER	CUSTOMER'S P	/N P/	'N	PRODUCT	F	REVISION
			KAN	3542B	TACT SWITCH	1	Α
	项目		试 验	条件			要求
	ITEM		TEST CON	NDITIONS		RE	QUIREMENTS
4	湿温测试 Moisture resistance	标准湿度的环境 Following the t normal temper measurements (1) 温度: 6 tempera (2) 相对湿	使 1 小时后做性est set forth belature and huminare made: 60±2℃ ture: 60±2℃ g: 90%~95% numidity:90% to 96h	能测试: ow the sam dity conditio	样品应放在常温及 ple shall be left in ns for 1 h before	Contac ≤200m 项目 3	
5	硫化试验 Sulfuration resistance	标准湿度的环境 Following the t normal temper measurements (1) H2S气 H <sub>2</sub> S gas (2) 时间: 72 (3) 温度: 4	图中 1 小时后做性est set forth belature and humicare made: 体浓度: 3ppm±/concentration:	能测试: ow the sam dity conditio 1ppm 3ppm±1ppn 6RH)	样品应放在常温及 ple shall be left in ns for 1 h before	接触电 Contac ≤200m 项目 3	
6	盐雾试验 Salt Mist	(1)温度:35 temperat (2)盐溶液浓 salt solut (3)时间:8h Time:8h 实验后的盐沉积	all be checked a ℃±2℃ :ure: 35℃±2℃ 度: 5±1%(质量 :ion : 5±1%(solid ±1h :1 hour	古分比) s by mass)		No re	上没有腐蚀斑点 markable corrosion be recognized in part.
APP	ROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.	10.25 PRPAR	E BY	曹 盖 09.10.25



	101110	7141	<u> </u>		AFFN	OVAL	<u> </u>		$\mathcal{A}$	אוכ
С	USTOMER		CUSTOMER'S	S P/N	P/	'N	PROI	DUCT	F	REVISION
					KAN3	542B	TAC	CT SWITCH		А
	限机械性能: NDURANCE	SPEC	IFICATION						<u> </u>	
	项目				试 验	条件				要求
	ITEM				TEST CON	DITIONS			RE	QUIREMENTS
	工作寿命 Operation		担根工事的	ᆒᄼᆂᆓᄼ	> > + + 25d > - + + + +					
1			(1) 按动 Rate (3) 按力 (4) Ope	nt shall 2V,50 2V, 50 n 速率:2 e of oper rating F	be made foll	load times/s erating Force ge fault-free	e1.5∼2	倍	resistar 触点弹 Conta 按力: Operati initial va 项目 3,4	阻≤200mΩContact nce≤200mΩ 力≤10ms ct bounce≤10ms : 初值的±30% ing Force: alue±30% 4.1,4.2,4.3 4.1,4.2,4.3
2	振动 Vibra	tion	Vib (2)振帕 Am (3)振动 Dire dire (4)测证	nt shall 力频率范 pration fr 届(峰一 plitude: 力方向: f ection c ection in 式时间:	be made foll 围: 10~55 equency rar 峰): 1.5mm	~10Hz nge: 10 to 55 n 是方向在内的 Three mutu direction of s	5 to 10H 三个相互 ally per	z 互垂直的方 pendicular		4.1,4.2,4.3 4.1,4.2,4.3
_	接条件:	DITION	vie.							
SULL	ERING CON	וטווטו								
			情.	医以下条	件进行焊接	:				
			(1)	焊锡温	度: ≤350℃					
7.1	手工焊接 Hand solde	erina	(2)	连续焊	接时间: ≤3	s				
	TIATIO SOIGE	, mig	Ple	ease pra	ctice accord	ing to below	condition	ons:		
			` '		ng temperatı ıous solderir					
APP	ROVE BY	黄蜀	东 09.10.25	CHE	CKED BY	关 林 09.	10.25	PRPARE	BY	曹 盖 09.10.25



С	USTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
			KAN3542B	TACT SWITCH	А
	项目		推考	字条件	•
	ITEM		Recommen	ded conditions	
7.2	回流焊时 Conditions for reflow	温度 (*C ) 180 - 150 -	120sec max.(预 3 to 4 m 炉内通过	热) 40s r	—— 时间

说明: 1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.


- 1.2 在使用烙铁的情况下,焊锡温度应在 380℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。
  Right after switches were soidered; please be careful not to load to on the knobs of switches.
- 2 设计中应注意的事项( Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
  Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关
  Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .
- 3.4 使用标准插入机器 PANASERT 和 RH6(使用 N 式钉)。
  Panasert RH and RH6 shall be used as the standard insert machine (use N type clinch).
- 3.5 产品应满足 SONY-SS-00259 环境管理物质管制标准。


Control hazardous substance: The product should be meet SONY-SS-00259 specification.


APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25




CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	А

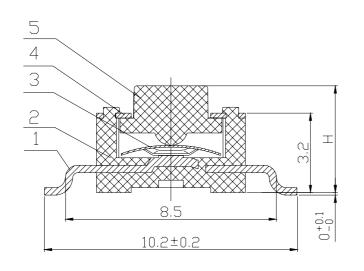



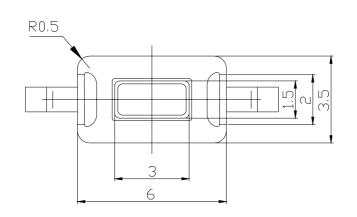



### General tolerance: ±0.1mm

	NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
	1	TERMINAL	Brass	China	1	Silver plating
-	2	CASE	FR52	USA	1	Black
	3	CONTACT	STS 301R	Korea	1	Contact side silver plating
	4	COVER	SUS 301		1	
	5	STEM	FR52	USA	1	Black

APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY
------------	--------------	------------	--------------	-----------

曹 盖 09.10.25



CUSTOMER	CUSTOMER'S P/N	P/N	PRODUCT	REVISION
		KAN3542B	TACT SWITCH	Α

8. 生产工场: The country of origin

### 9. 包装: Packing

产品规格	包装袋 PAC	KING BAG	内包装箱 INTEF	R BOX	外包装箱 OU	Т ВОХ	净重	毛重
KAN3542B	规 格(Cm)	数量(pcs)	规 格(Cm)	袋数	规 格(Cm)	盒数	(Kg)	(Kg)
043	19×16	2000	$21.6 \times 16.5 \times 4.8$	5	44.5×35×28	20	26.5	29.082
050	19×16	2000	$21.6 \times 16.5 \times 4.8$	5	$44.5\times35\times28$	20	27.2	29.782

│ APPROVE BY │ 黄蜀东 09.10.15 │ CHECKED BY │ 关林 09.10.15 │ PRPARE BY │ 曹 盖 09.10.15
---