

Amber Electronic Limited

UF5400 THRU UF5408

FEATURES


Reverse Voltage - 50 to 1000 Volts

ULTRA FAST RECTIFIERS
Forward Current - 3.0 Amperes

The plastic package carries Underwriters Laboratory
Flammability Classification 94V-0
Ultra fast switching for high efficiency
Low reverse leakage
High forward surge current capability
High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750,
Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.04 ounce, 1.10 grams

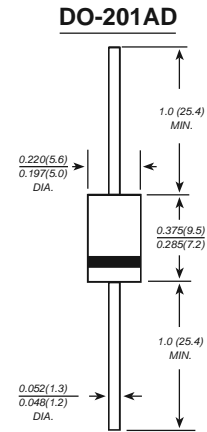

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	UF 5400	UF 5401	UF 5402	UF 5403	UF 5404	UF 5405	UF 5406	UF 5407	UF 5408	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	3.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0									Amps
Maximum instantaneous forward voltage at 3.0A	V_F	1.0			1.70						Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0 150.0									μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50				75				ns	
Typical junction capacitance (NOTE 2)	C_J	45									pF
Typical thermal resistance (NOTE 3)	R_{qJA}	20.0									$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150									$^\circ\text{C}$

Note: 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES UF5400 THRU UF5408

