




DEGSON ELECTRONICS CO., LTD.

Product Specification

CE



PC Ik35

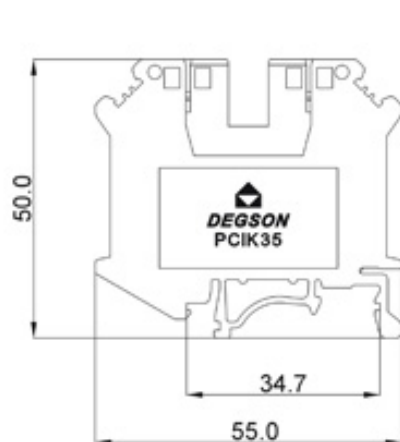

Capability		
Approval		
Standard	UL	IEC
Rated Voltage	600V	600V
Rated Current	115A	125A
Wire size	18-2AWG	0.75-35 mm ²
T/W/End plate	15.2/55/-mm	
Height _{mm} (NS35:7.5/NS35:15/NS32)	51/58.5/59mm	
Rated Surge Voltage/Contamination Class	8kV/3	
Stripping Length	16 mm	
Screw Thread/Tightening Torque	M6/2.5N.m/22Lb-in	
Internal Cylindrical Gage	B7	
Insulating Material/Inflammability Class	PAV-0	

Specification	Model	Pieces
(1) Terminal Block	PCIK35	50
(2) End Cover		
(3) Fixed Bridge	FBI 2-15 FBI 3-15	10 10
(4) Step Bracket		
(5) Insertion Bridge	EB 2-15 K/PCIK 35 EB EB 3-15 K/PCIK 35 EB 10-15 K/PCIK 35	50 10 10
(6) Isolator Bridge Bar, 10 P		
(7) Bridge Bar Isolator		
(8) Switching Bridge	SBH 2-15	1
(9) Separating Plate	IS-K	50
(10) Separating Plate, Width:1.5mm	ATP-PC	50
(11) Test Plug Socket	PSB 6/5/6	100
(12) Test Plug Socket, Insulated		
(13) Zack Strip	ZB10	

HOW TO ORDER:

PCIK35 — P — 1 —

X	X	X
Customer Request		

1 Gray	4 Green	7 Trans-parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Series No.

No. of Pole

Color

			DEGSON ELECTRONICS CO., LTD.
NAME		PCIK35	